

A

正面视图

侧面视图

背面视图

序号客户	RoHS	NO.	CONTENT	DATE
保密等级(秘密)				
A	Δ		REV	20231020
M	Δ		修改内容请备注, 增加内容请标注, 删除内容请标注	20240205
E	Δ		以上内容修改时请备注, 增加内容请标注, 删除内容请标注	20240418
N	Δ			
D	Δ			

PIN ASSIGNMENT:

PIN	SYMBOL	PIN SYMBOL
1	LED+	21 BO
2	LED+	22 B1
3	GND	23 B2
4	VDD	24 B3
5	R0	25 B4
6	R1	26 B5
7	R2	27 B6
8	R3	28 B7
9	R4	29 B8
10	R5	30 CLK
11	R6	31 DISP
12	R7	32 HSYNC
13	G0	33 VSYNC
14	G1	34 DE
15	G2	35 NC
16	G3	36 GND
17	G4	37 NC
18	G5	38 NC
19	G6	39 NC
20	G7	40 NC

标签内容说明:




MFG843013-01
YYMDDFF17

LIGHT SHIELDING TAPE WITH DATE CODE


背面内容说明:

背光模组
BLU-L-843013-10/LED-BL
S07824-05
客户编号(国码)
生产日期: 231103 (国码)

注: 见规格书, 模拟客户一按实物, 实物不便于描述

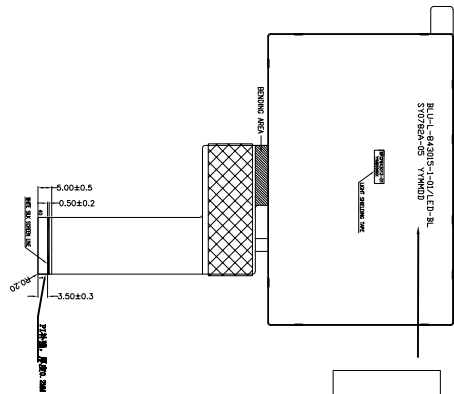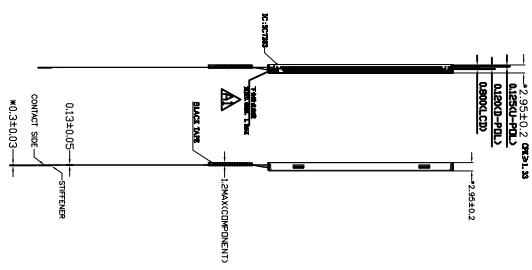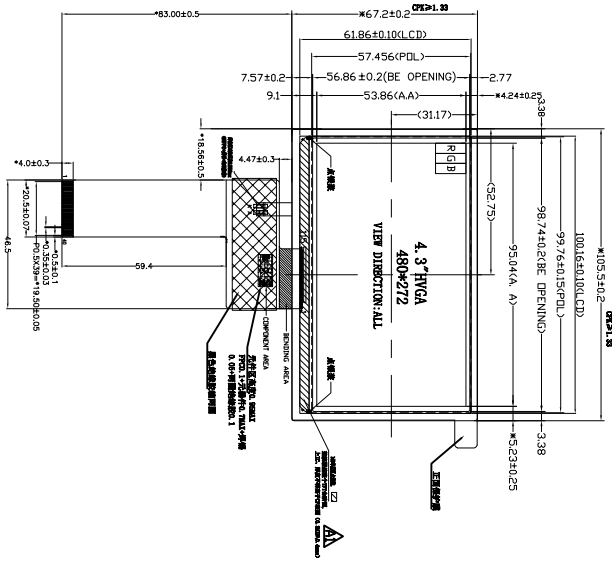

FPC展开出货
背光源在下



- 技术参数:
1. 显示类型: 4.3" HVGA TFT, TRANSMISSIVE/NORMALLY BLACK;
 2. LCD型号: 瀚影 HS0043B9W3-A00, ICD型号: S7283 ;
 3. OPERATING TEMPERATURE: -20° C TO 70° ; STORAGE TEMPERATURE: -30° C TO 80° C
 4. No Use of Prohibited Substances defined in SGP-E-QS-009
 5. Only purchase designated Raw Materials from Green Partners.
 6. Contrast ratio: 650:1, 800:1, 均同性: 80% min 85% typ.
 7. 尺寸标注: 带*处为重点管控尺寸, 其余为推荐尺寸; 公差: ±0.2;
 8. 尺寸标注: 带*处为重点管控尺寸, 其余为推荐尺寸; 公差: ±0.2;
 9. POC料号: 83-04340-7091A