




正面图

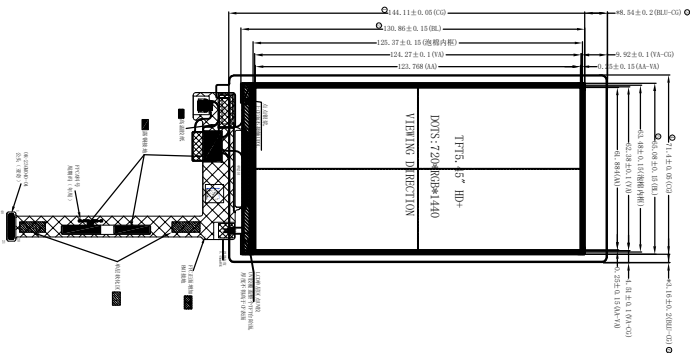


侧面图

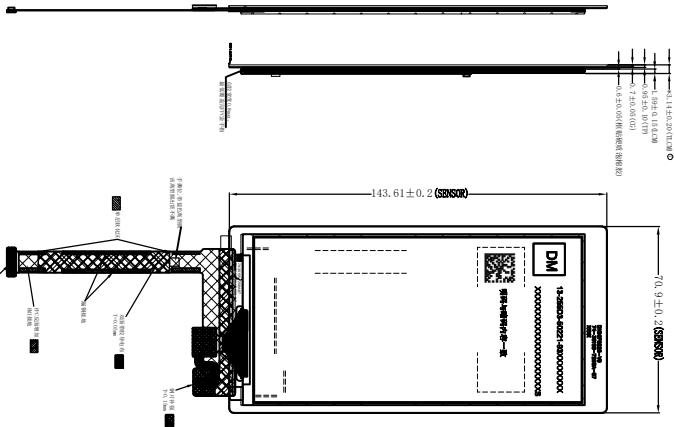

背面图

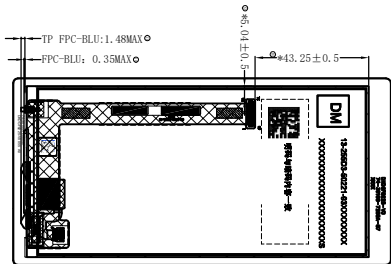

FPC弯折后示意图
FPC弯折出货



LED CIRCUIT DIAGRAM:



LED IF=40mA, VF=21±1.4V

1	VLD28_PMU(2.8V)
2	SDA(1.8V)
3	SCL(1.8V)
4	RESET(1.8V)
5	EINT(1.8V)
6	GND

NO.	Signal
1	LEDA
2	LEDA
3	NC
4	GND
5	ANDD
6	AIEE
7	GND
8	NC
9	GND
10	DP3
11	DP3
12	GND
13	GND
14	TP_VDD28
15	GND
16	TP_RST
17	TP_EINT
18	GND
19	SDA
20	SCL
21	GND
22	LOD_DP(INC)
23	LOD_DP(DEC)
24	TE
25	LOD_RST
26	LOD_VDDIO16
27	GND
28	DP2
29	DP2
30	DP2
31	GND
32	CLAP
33	CLAP
34	GND
35	DP1
36	DP1
37	GND
38	DP0
39	DP0
40	GND

Customer approve

DJN 帝晶光电 DJN OPTRONICS TECHNOLOGY CO., LTD.

Model No	98-31054-7208A	Part No	SZA6314
Drawing Title	全贴合成品	Drawn	覃东浩
Drawing No	D-RD-127-24	Checked	叶才禄
Scale 1:1	第三视角	Approve	王晓琳
		Unit	MM
		Page	1/1

RoHS

NO.

CONTENT

DATE

NEW

20240607

A	NEW	20240607
M		
E		
N		
D		