


由 Autodesk 教育版产品制作

NO.	X6 PIN define
1	ID2(I0VCC)
2	VSP1(+V)
3	ID1(I0VCC)
4	NTCI(1.8V)
5	GND
6	VSNI(-V)
7	TP_RST
8	NTC(OUT)
9	GND
10	I0VCC(1.8V)
11	D3P
12	GND
13	D3N
14	CTP_INT
15	GND
16	SPI_CS
17	DOP
18	SPI_MISO
19	DON
20	SPI_MOSI
21	GND
22	SPI_CLK
23	CLKP
24	TE
25	CLKN
26	PWM
27	GND
28	RST
29	D1P
30	GND
31	D1N
32	NC
33	GND
34	LEDK1
35	D2P
36	LEDK2
37	D2N
38	LEDK3
39	GND
40	LEDA

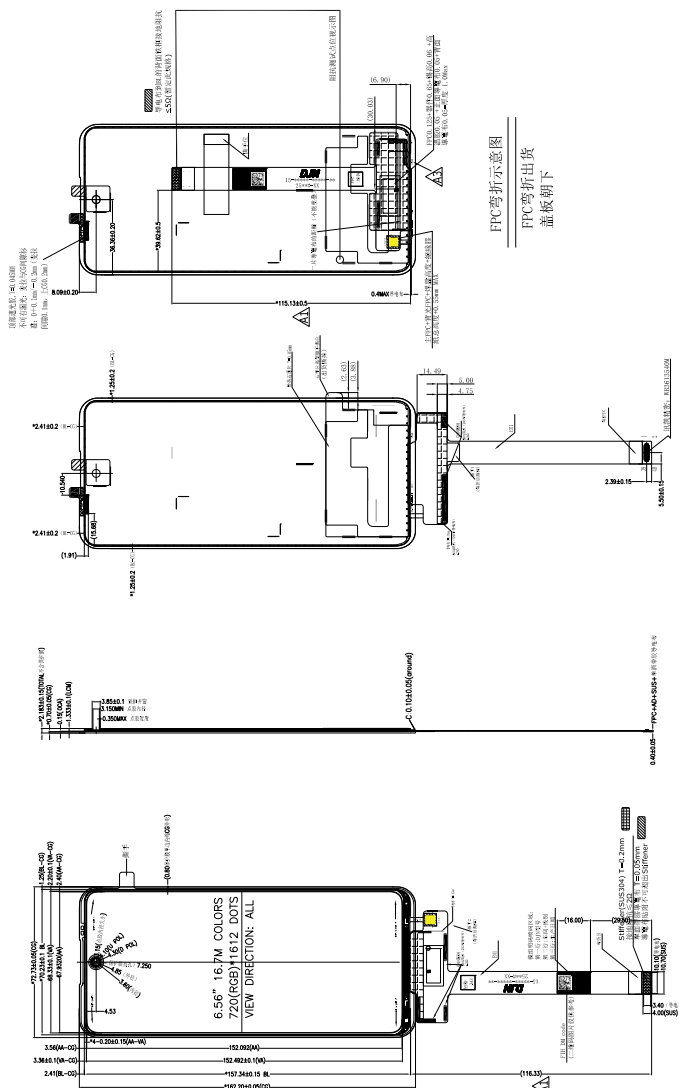

PC弯折示意图

Customer approve	 DJN 帝晶光电 DJN OPTONICS TECHNOLOGY CO., LTD.				
	Model No	9F-3M066-1546B	Part No	SZA6832	
	Drawing Title	全贴合成品	Drawn	ZLY	A16
	Drawing No	D-RD-069-25	Checked	CK	Unit MM
	Scale 1:1	第三视角	Approve	leo	Page 1/1

DJN帝晶光电
DJN OPTONICS TECHNOLOGY CO., LTD.

LED+(LED_A) LED-(LED_A1) LED-(LED_A2) LED-(LED_A3)

LED CIRCUIT DIAGRAM

65SP, 60mA, 16, 2-17, 4W

中心点引出, 上下点接+12V电源

1. 显示器类型: 15.5" TFT-LCD
 2. 分辨率: 635*451 TFT-LCD, 16.7M Colors, Inell, with G
 3. 亮度: 200cd/m²
 4. 显示模式: Negative Mode, Active Black
 5. 垂直刷新率: 60Hz
 6. 垂直同步: 48KHz
 7. 显示接口: DVI-D, D-Sub 15pin
 8. 背光类型: CCFL
 9. 背光寿命: 50,000h
 10. 功耗: 15W
 11. 重量: 1.5kg
 12. 尺寸: 422*342*100mm
 13. 保修: 3年