

1	VLEDA
2	VLEDA
3	NC
4	NC
5	FB1 LEDK
6	FB2 LEDK
7	FB3 LEDK
8	FB4 LEDK
9	FB5 LEDK
10	FB6 LEDK
11	GND
12	NC
13	NC
14	NC
15	USP
16	VSN
17	GND
18	GND
19	DOP
20	DON
21	GND
22	DIP
23	DIN
24	GND
25	CLKP
26	CLKN
27	GND
28	D2P
29	D2N
30	GND
31	D3P
32	D3N
33	GND
34	ICD REST
35	ID0 GND
36	ID1 GND
37	GND
38	LED PWM0
39	I2C_SCL TP
40	I2C_SDA TP
41	TP INT
42	TP_RST
43	LCD_I0VCC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	GND

*161.14±0.1(CG)	*4.74±0.2(BL OD TO CG OD)
*141.86±0.2(BL U)	6.35
138.96±0.15(FET)	6.64
138.96±0.15(OCA)	6.55
138.66±0.15(POL)	7.70±0.15
136.16±0.15(CG V/A)	8.10
135.36±0.15	
126±0.15(LCD AA TO TP V/A)	
6.20	
6.20	
6.20	
7.48±0.15	
7.28	

*2.85±0.2(CG+OD+1CM)	
(不含偏框)	
0.70±0.1(CG)	
0.175±0.0CA	
1.97±0.1(CM)	

HF	REACH	RoHS	NO.	CONTENT	DATE
		保密等级(秘密)	△	NEW	20230921
			△		
			△		
			△		

HF	REACH	RoHS	NO.	CONTENT	DATE
		保密等级(秘密)	△	NEW	20230921
			△		
			△		
			△		




1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

正视图

侧视图

背视图

弯折图

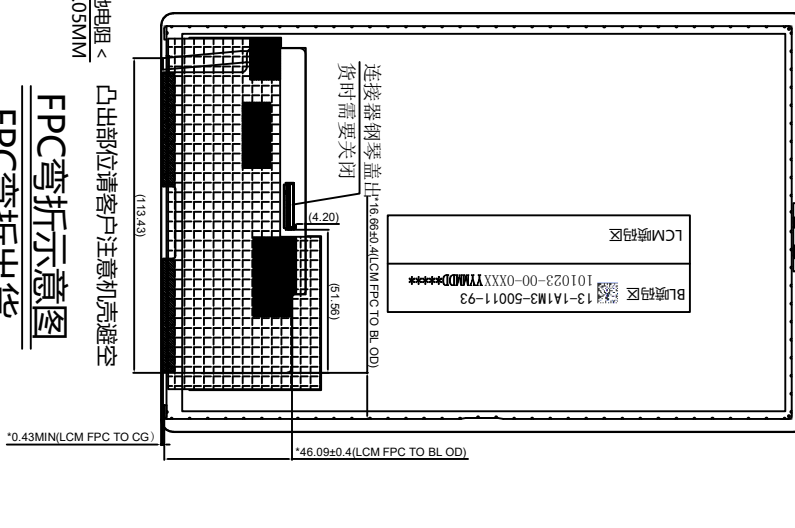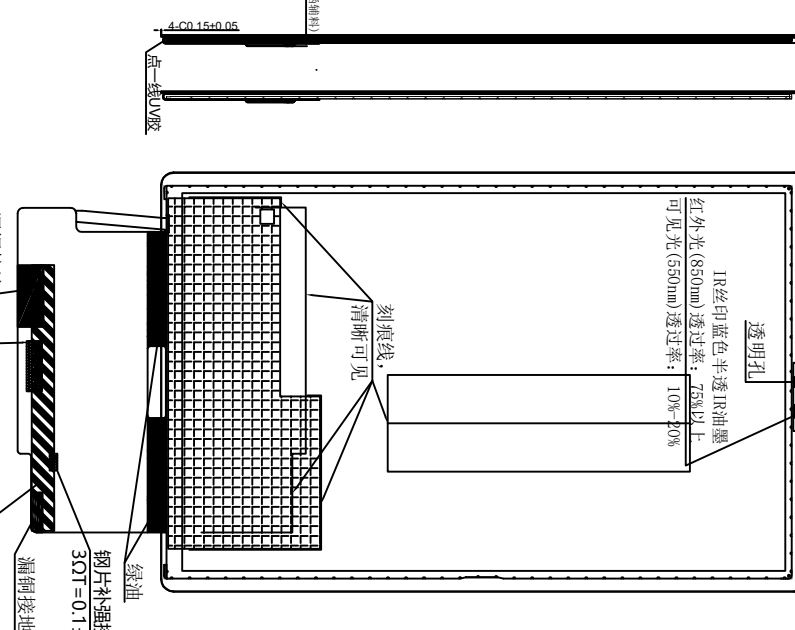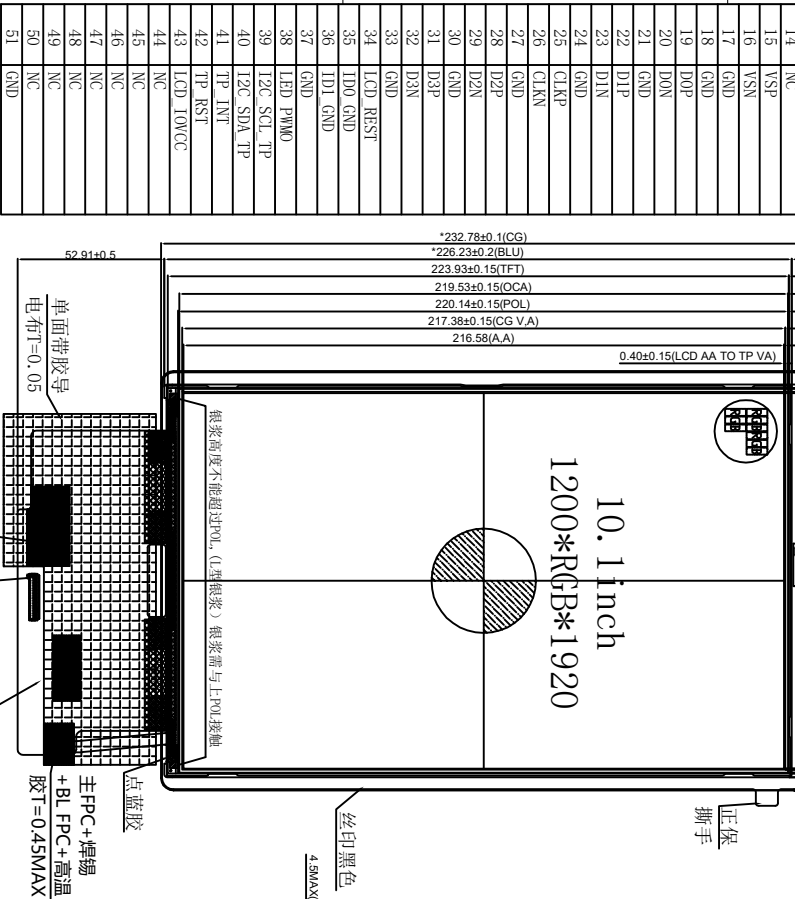

技术参数:

1. 产品规格: 11.2寸
2. 产品重量: 1.2kg
3. 产品尺寸: 280mm x 160mm x 10mm
4. 产品功耗: 20W
5. 产品寿命: 50,000小时
6. 产品温度: -20°C ~ 70°C
7. 产品湿度: 20% ~ 80%
8. 产品电压: 5V ~ 12V
9. 产品接口: USB, HDMI, DVI, VGA
10. 产品认证: CE, FCC, RoHS
11. 产品包装: 符合 GB/T 191-2008 标准

软件ID:

DAh=0x93
DBh=0x20
DCh=0x00

规格参数:

1. Class: 0.7mm
2. 规格: 11.2寸
3. 规格: 11.2寸
4. 规格: 11.2寸
5. 规格: 11.2寸
6. 规格: 11.2寸
7. 规格: 11.2寸
8. 规格: 11.2寸
9. 规格: 11.2寸
10. 规格: 11.2寸
11. 规格: 11.2寸

1

2

3

4

5

6

7

8