
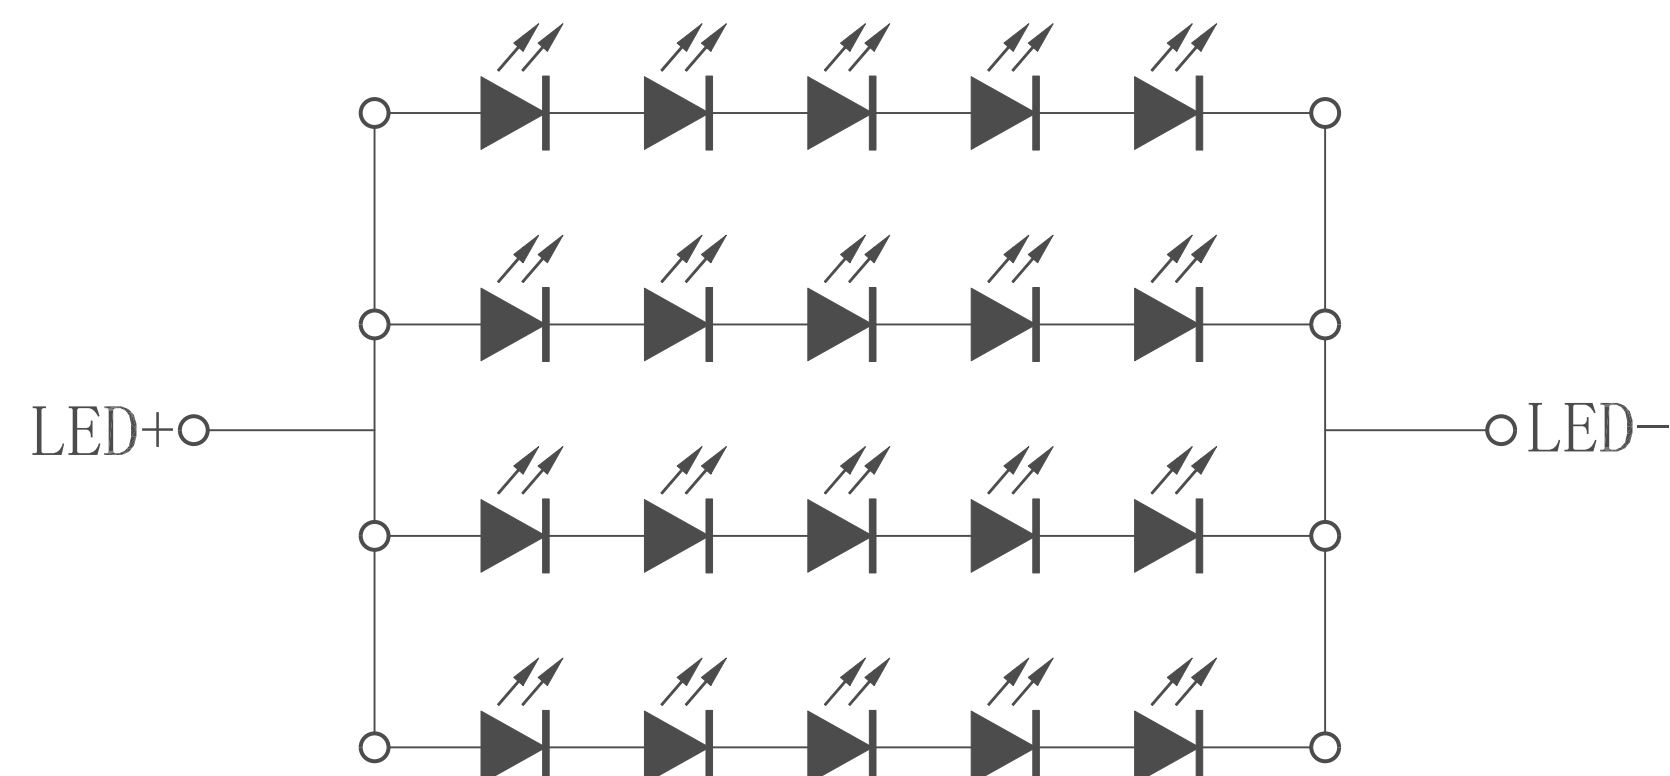
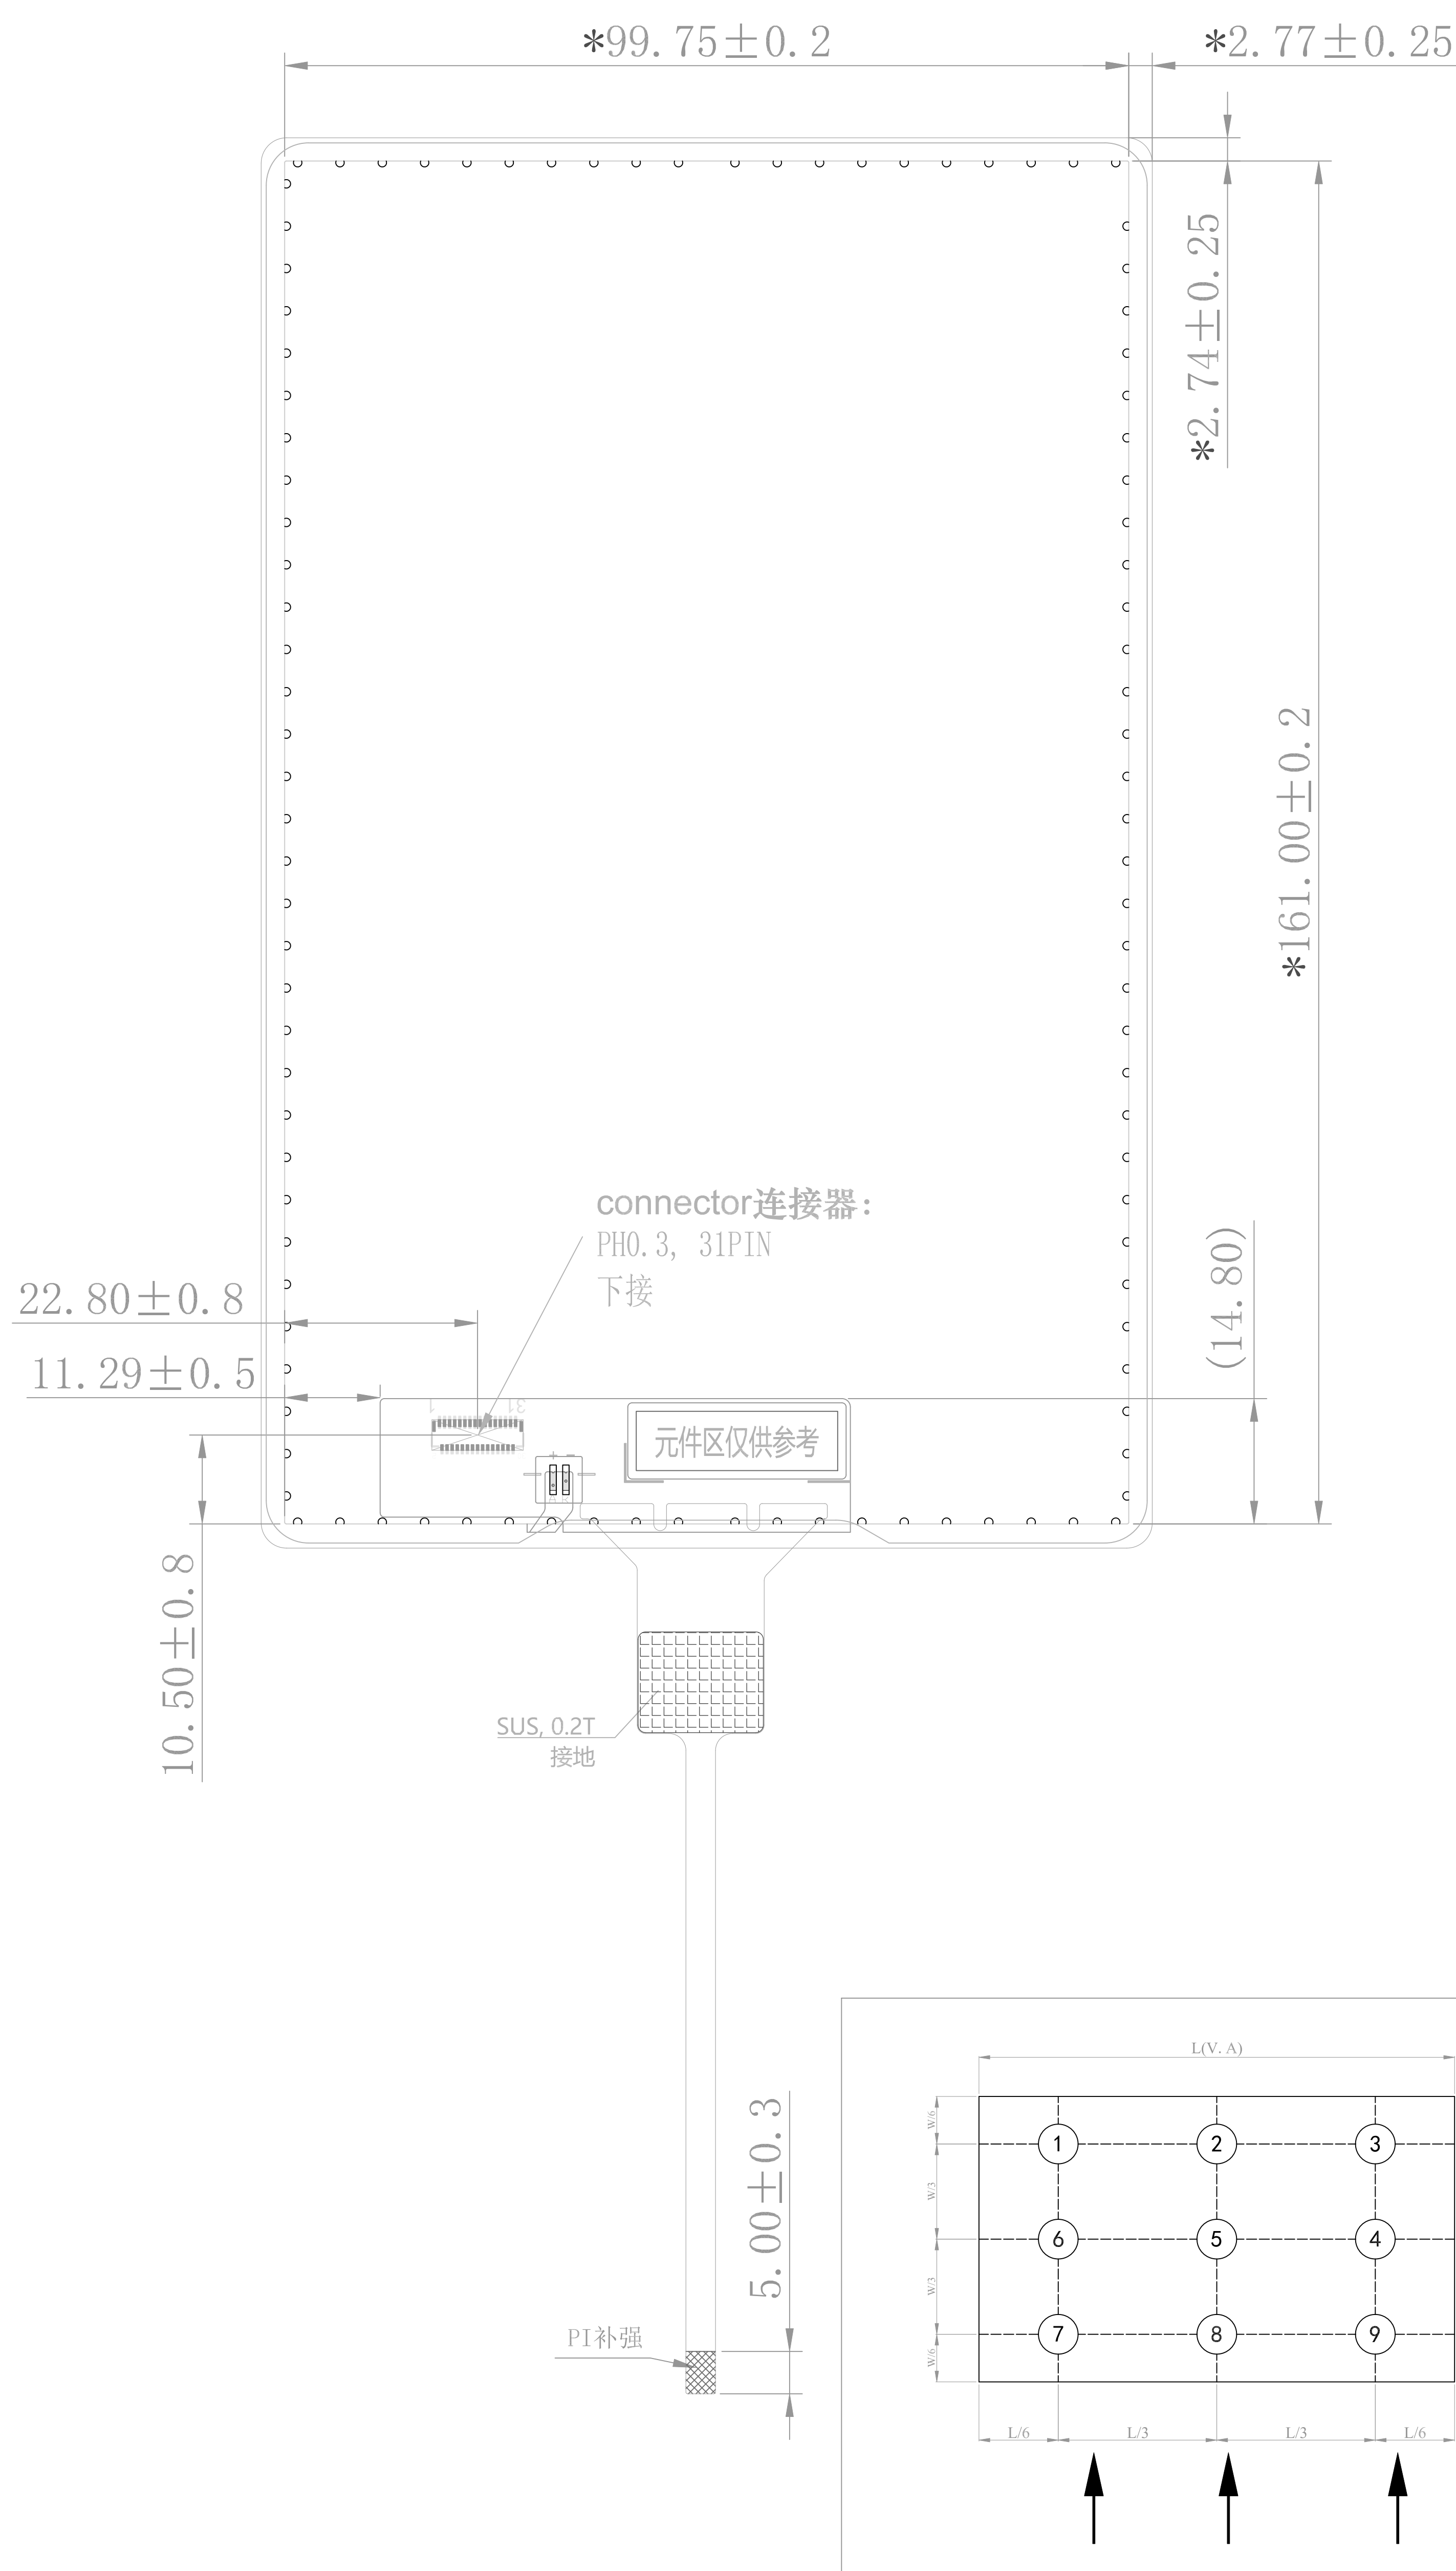


背视图

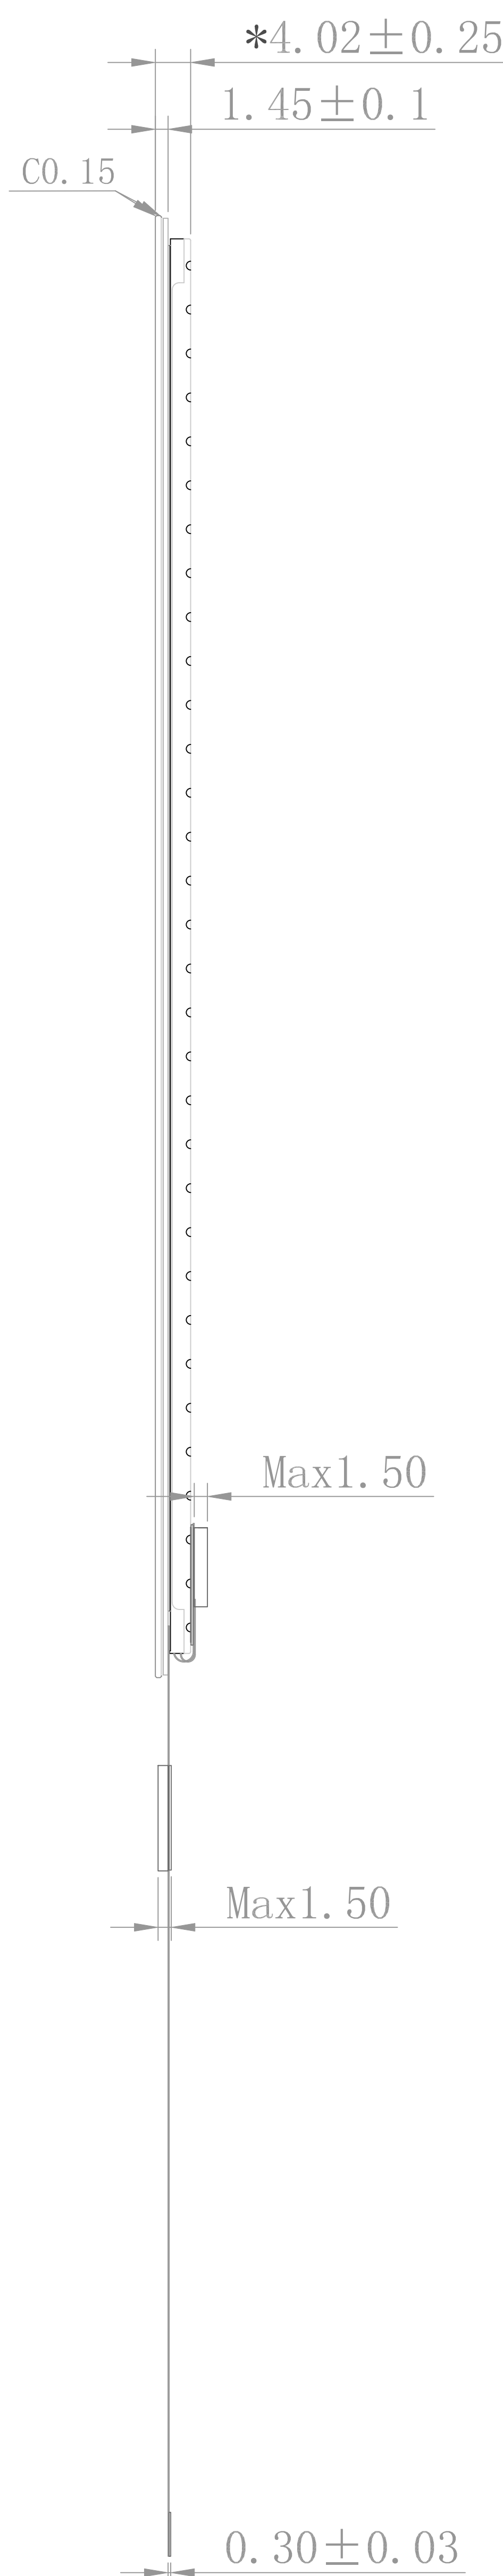

背光电路图 (CIRCUIT DIAGRAM)

PIN NO	PIN DEFINE
1-3	LED A
4	NC
5-8	LED K
9-10	GND
11	MIPI_TDP2
12	MIPI_TDN2
13	GND
14	MIPI_TDP1
15	MIPI_TDN1
16	GND
17	MIPI_CKP
18	MIPI_CKN
19	GND
20	MIPI_TDP0
21	MIPI_TDN0
22	GND
23	MIPI_TDP3
24	MIPI_TDN3
25	GND
26	NC
27	RESET
28	NC
29	IOVCC
30-31	VDD_3.3V

TP技术要求:

- 1、结构类型:GG (电容屏)
- 2、IC型号:GT911;
- 3、表面硬度: $\geq 7H$, 750g;透光率: $\geq 88\%$;
- 4、工作环境: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$; 储存环境: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$;
- 5、ESD 接触: $\pm 6\text{KV}$; ESD 空气: $\pm 8\text{KV}$;
- 6、LENS材质旭硝子;表面应力 $\text{CS} \geq 450\text{Mpa}$, $\text{DOL} \geq 8\text{um}$
- 7、白色油墨+丝印点状图案

LCM技术参数:

- 1.产品结构:液晶显示模组
- 2.显示类型:7.0" 800*1280 TFT,NORMALLY BLACK
- 3.LCD型号:BOE TV070WXQ-NW1, IC型号:JD9365DA-H3;
- 4.背光LED:20 LED'S,5S4P,电流电压:Vf: Typ 15V / Max17V,If=80mA;
- 5.光学参数:亮度:250cd/ m²(MIN),300cd/ m²(typ),均匀性:75%(MIN)80%(TYP)
- 6.存储温度:-30°C~80°C, 工作温度:-20°C~70°C;
- 7.未标注尺寸公差:±0.2;
- 8.环保要求:ROHS;

DIMENSION	1 GRADE	2 GRADE	3 GRADE	4 GRADE
$L \leq 20$	0.05	0.1	0.1	0.2
$20 < L \leq 50$	0.1	0.15	0.2	0.25
$50 < L \leq 100$	0.15	0.2	0.25	0.3
$100 < L \leq 200$	0.2	0.25	0.3	0.5
$200 < L$	0.25	0.3	0.5	0.8

UNLESS OTHERWISE SPECIFIED

Customer approve

DJN 帝晶光电 SHEN ZHEN DJN PHOTOELECTRIC TECHNOLOGY CO.,LTD

Model No	9G-12070-Z137H	Part No	SZA5535	
Drawing Title	贴合成品	Drawn	杨浩	A0
Drawing No	D-RD-182-24	Checked	秦福军	Unit MM
Scale 1:1	第三视角 	Approve	秦福军	Page 1/1