



主视图

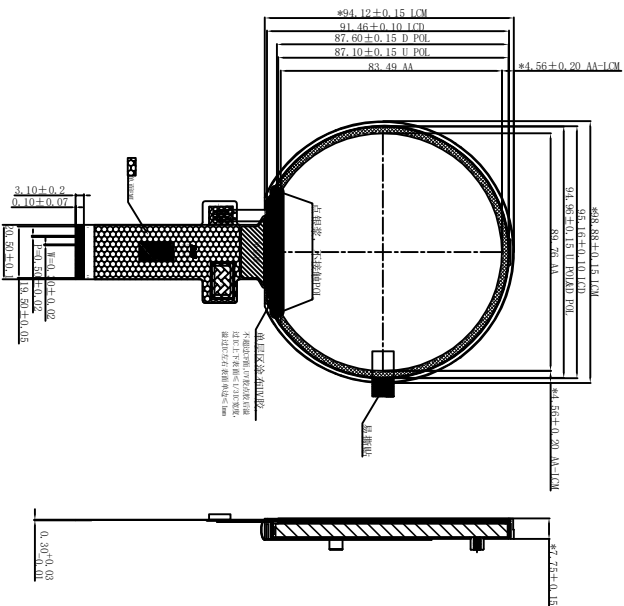


侧视图

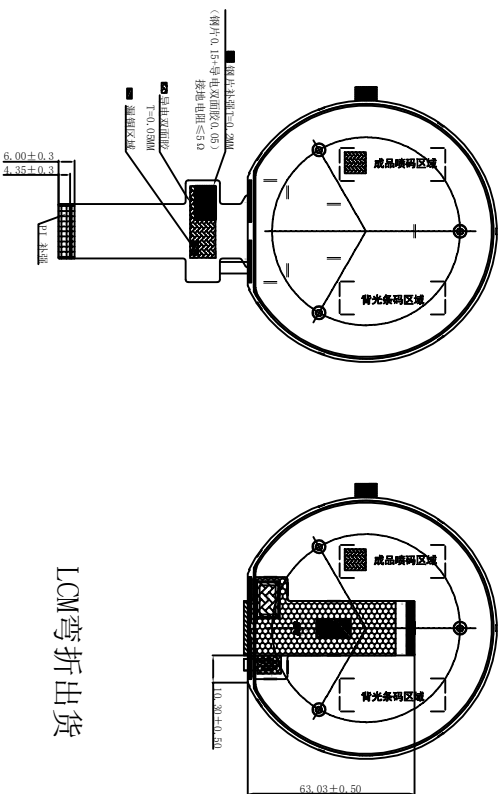

LCM弯折出货

HF	REACH	RoHS	保密等级 (秘密)		
			No.	CONTENT	DATE
			A	NEW	2023.09.19
			M		
			E		
			N		
			D		

1	LEDK
2	GND
3	VCC
4	R0
5	R1
6	R2
7	R3
8	R4
9	R5
10	R6
11	R7
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	G6
19	G7
20	B0
21	B1
22	B2
23	B3
24	B4
25	B5
26	B6
27	B7
28	GND
29	CLK
30	DSP
31	HSYNC
32	VSYNC
33	DEN
34	NC
35	NC
36	NC(R)
37	NC(R)
38	NC(D)
39	NC(X)
40	NC(Y)



LED CIRCUIT DIAGRAM(电路图)

NOTE:

1. DISPLAY MODE : 3.6 IPS , 16.7M COLOR STRANSMISSIVE, NORMALLY BLACK BOE/AV036KAU-N80 (0.4/0.4)
 2. Driver IC:ST72566
 3. Viewing Direction: ALL 0° Clock4. Operating Temperature: -35° - +85°
 5. Storage Temperature: -35° -+85°
 6. Backlight Type:20 White LEDs, 5串4并
 7. BL Input Current: 180 mA
 8. LCM Brightness: 1000 cd/m TYP
- 如果客户做全贴合，考虑到LCM材料公差，LCM组装公差，CTP贴合公差，CTP丝印公差，建议CTP的丝印开窗在屏AA区单边外扩0.2MM标示”*”的尺寸为重卢管控尺寸
- 未注尺寸公差:±0.2

TOLERANCE TABLE ($\pm$)				
DIMENSION	1 GRADE	2 GRADE	3 GRADE	4 GRADES
$L \leq 20$	0.05	0.1	0.1	0.2
$20 < L \leq 50$	0.1	0.15	0.2	0.25
$50 < L \leq 100$	0.15	0.2	0.25	0.3
$100 < L \leq 200$	0.2	0.25	0.3	0.5
$200 < L$	0.25	0.3	0.5	0.8

Customer approve		 DJN 帝晶光电 DJN OPTRONICS TECHNOLOGY CO., LTD.			
Model No	90-03640-7070E	Part No	SZ.A5590		
Drawing title	液晶显示模组	Drawn	文泽圣	A0	
Drawing No	D-RD-XXX-XX	Checked	覃东浩	Unit MM	
Scale 1:1	第三视角 	Approve	李丹丹	Page 1/1	