
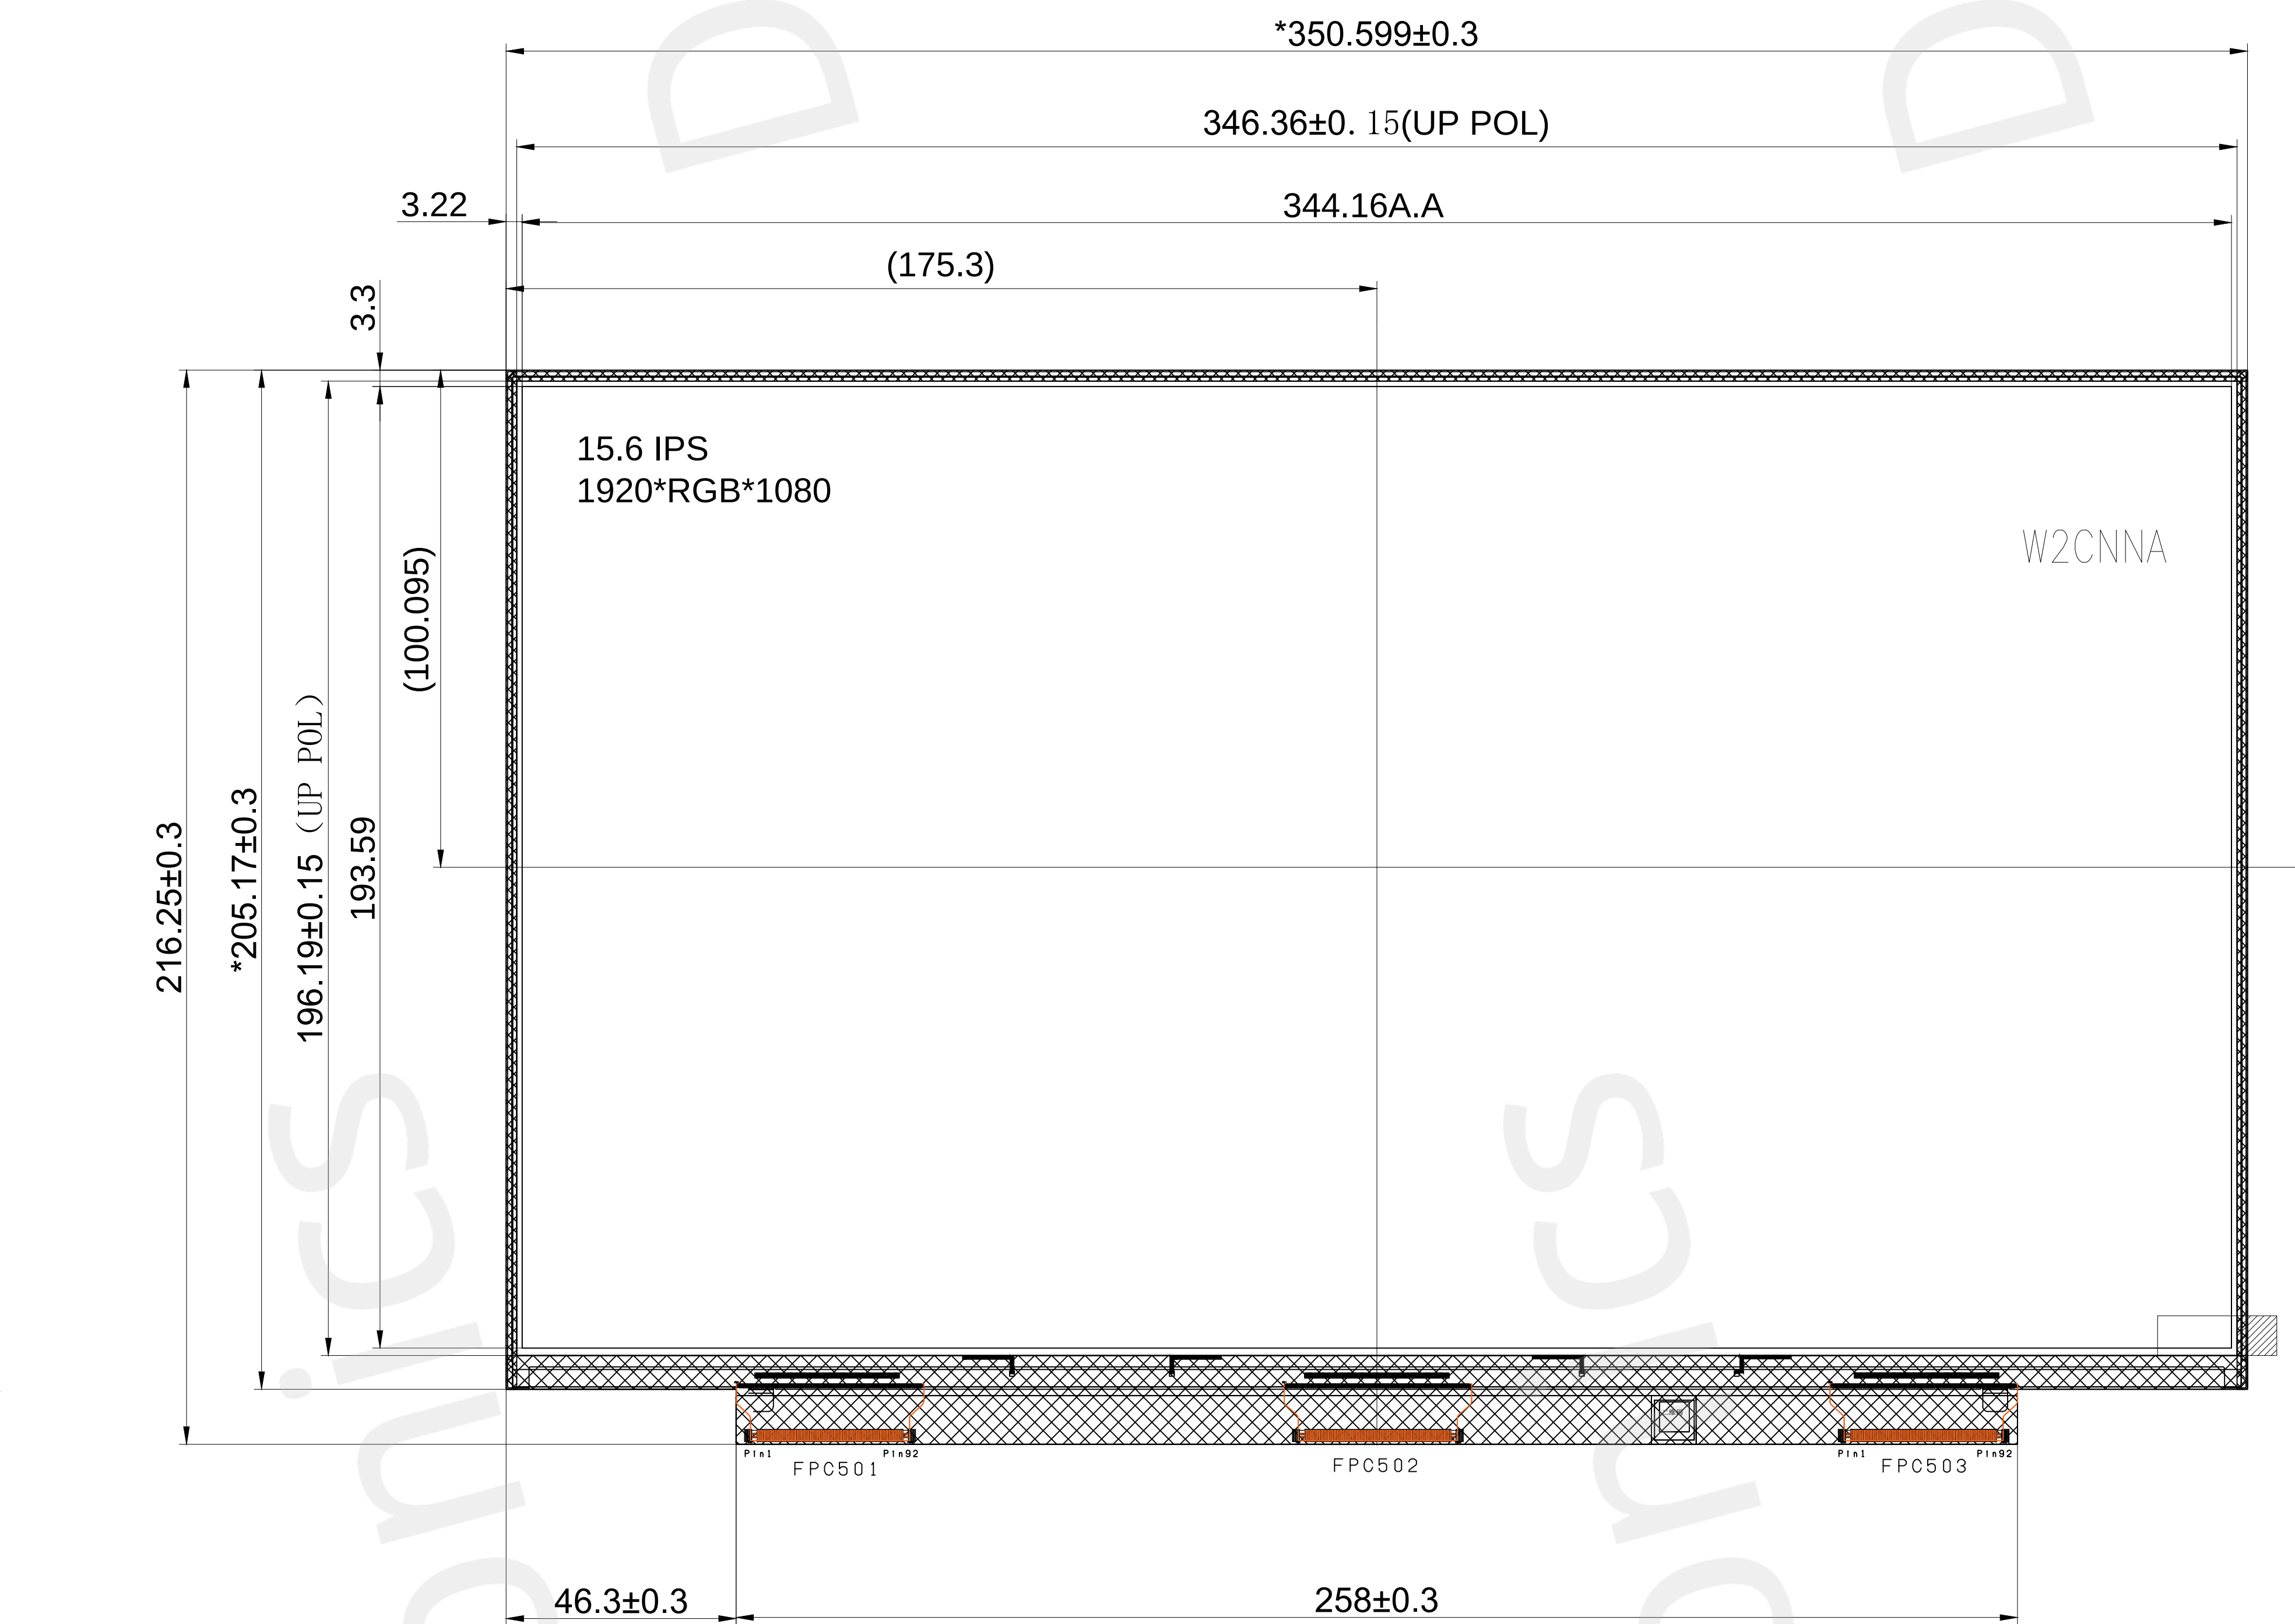



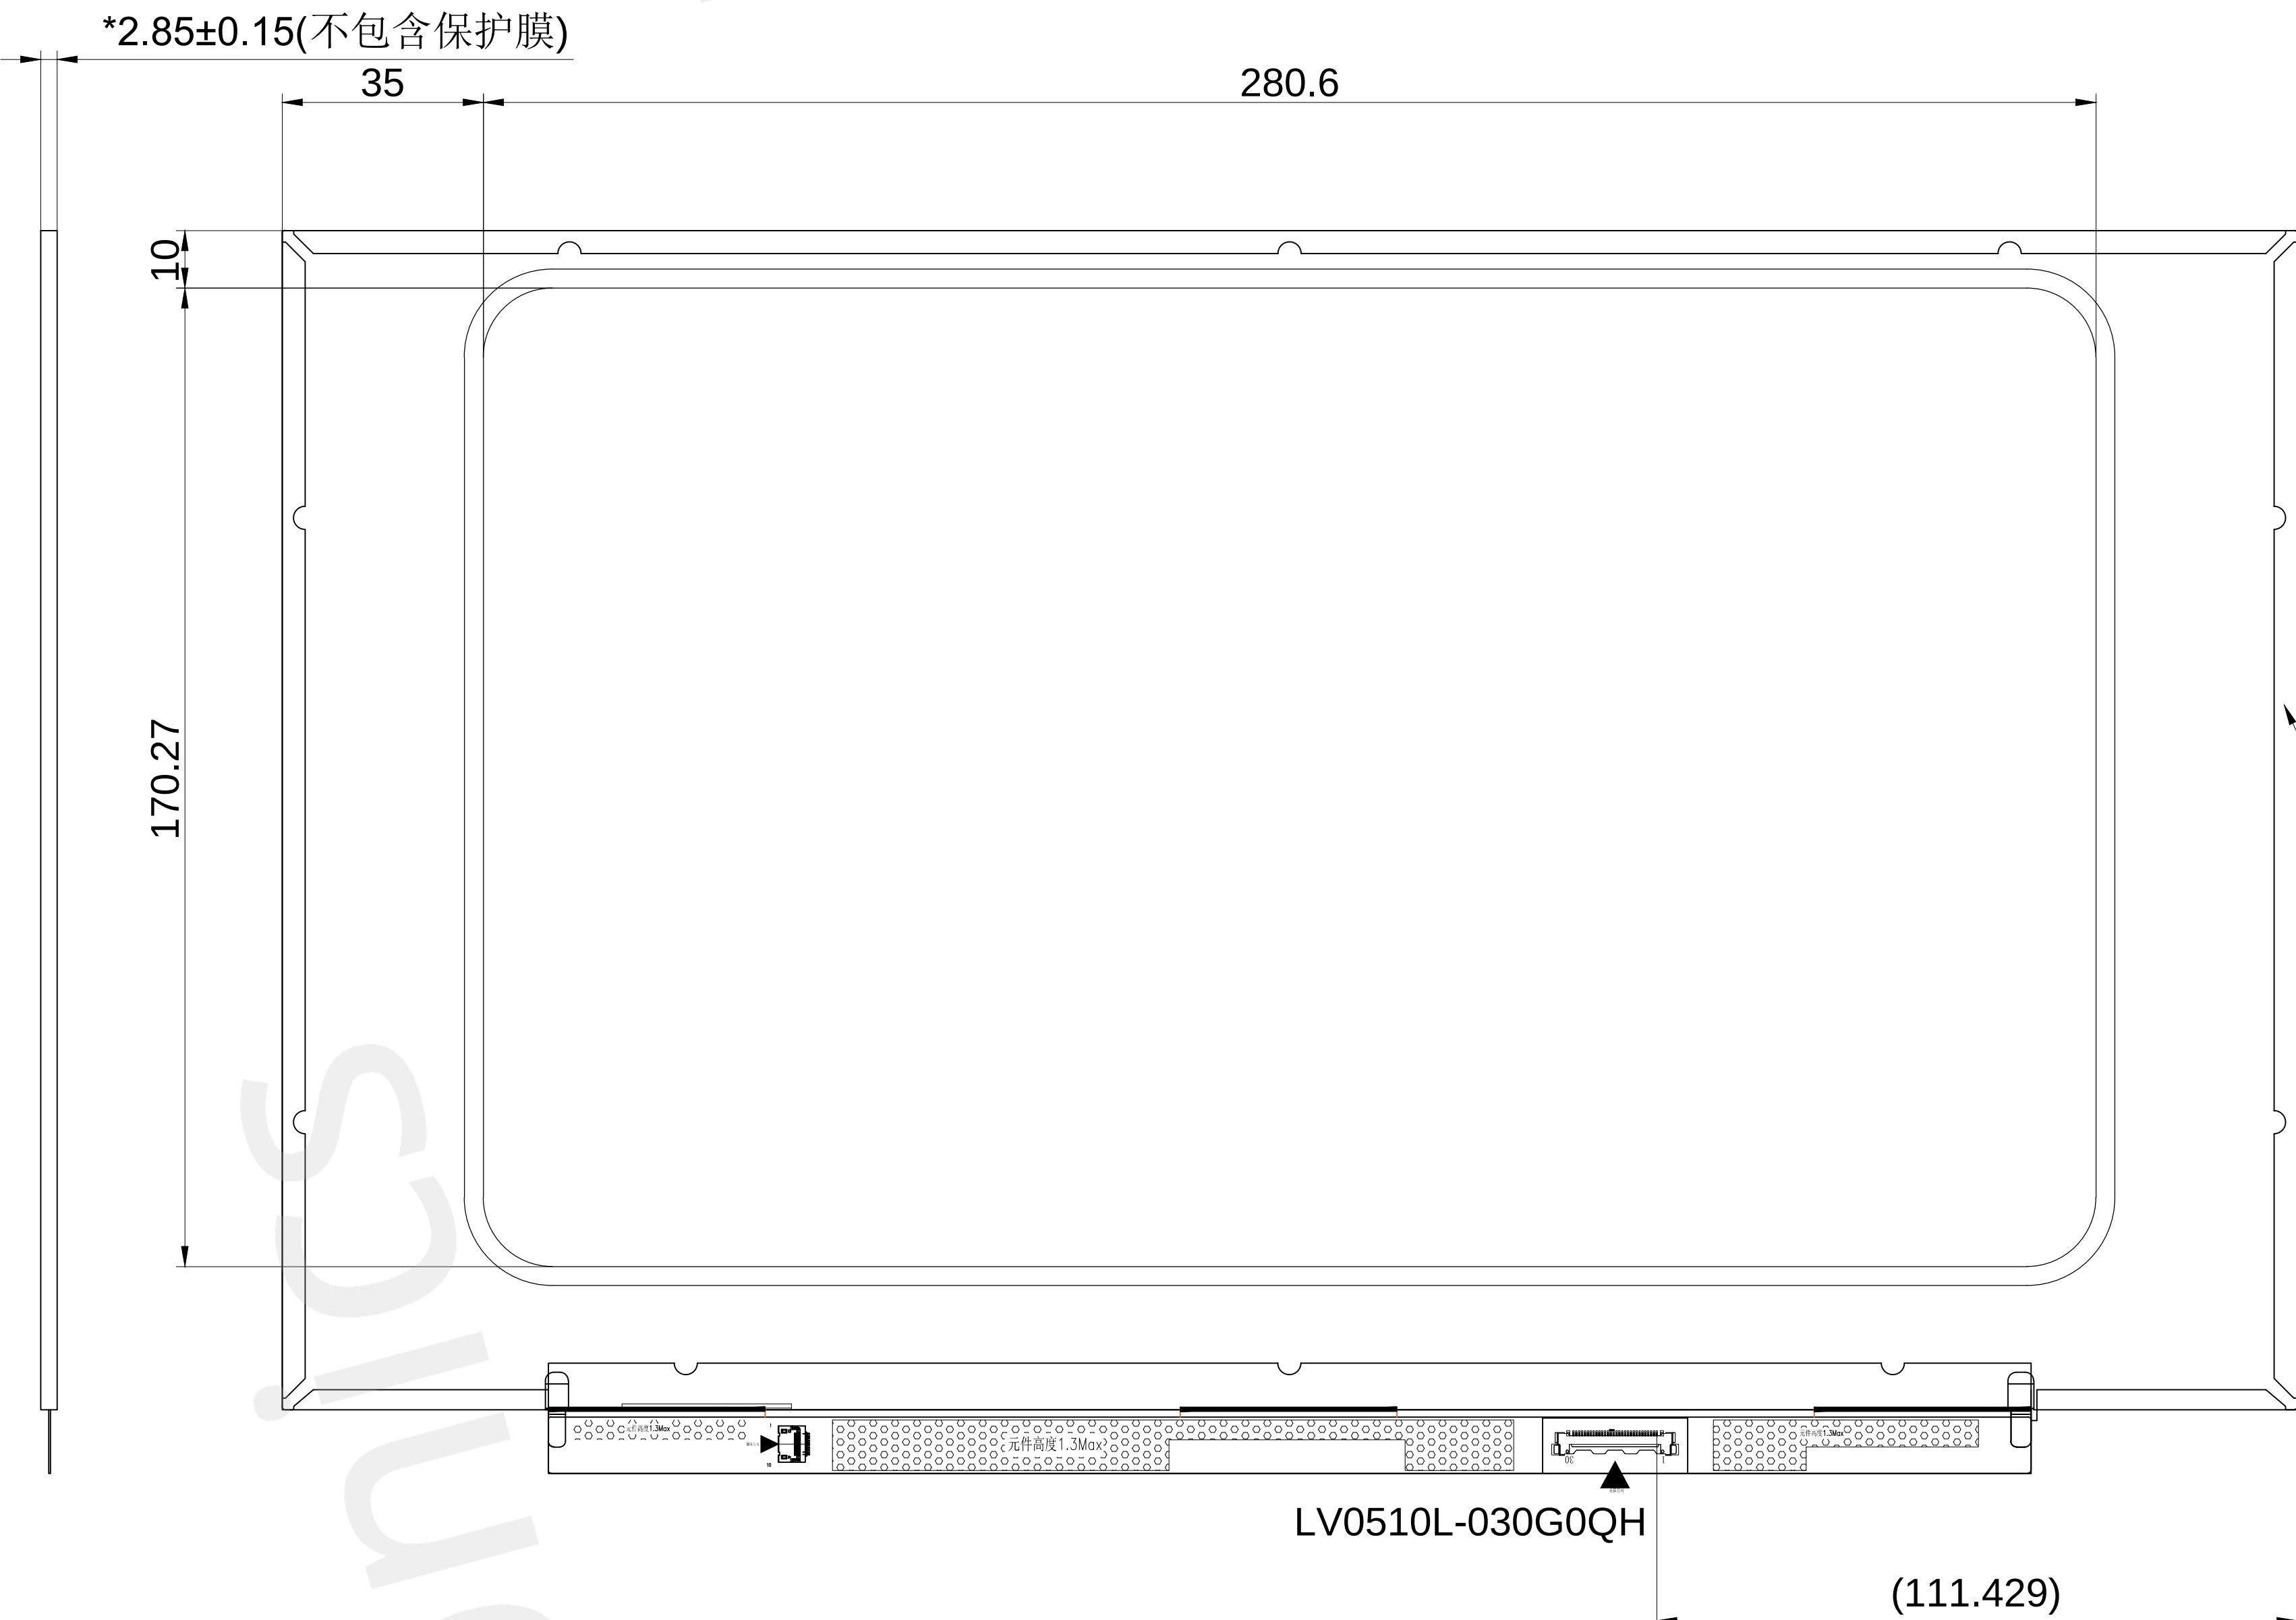


Front view

Side view

Back view

- NOTES:
- DISPLAY TYPE: 15.6", TFT LCD
 - DISPLAY MODE: Normally White
 - VIEWING DIRECTION: ALL 85/85/85/85(typ)
 - Operating TEMP: -0° C TO 50° C
Storage TEMP: -20° C TO 60° C
模组亮度: 280cd/m² (MIN), 300cd/m² (TYP. 中心点)
亮度均匀性: 80%min/85%typ (9点平均 1/6距边);
色坐标: X:0.31±0.025, Y:0.3359±0.025
对比度: 1200(min), 1500(typ)
NTSC: 72%(typ)@CIE1931
 - * Critical Parameter with item ①~⑨
() ref Parameter, □cpk Parameter
Unspecified Tolerances: ±0.30mm
Modification mark:
 - SUGGESTION: TP window size unilateral increase 0.3~0.5mm than LCM A.A
Gasket covered above top polarizer edge, 0.3mm min.
 - REQUIREMENTS ENVIRONMENTAL PROTECTION: RoHS and HF

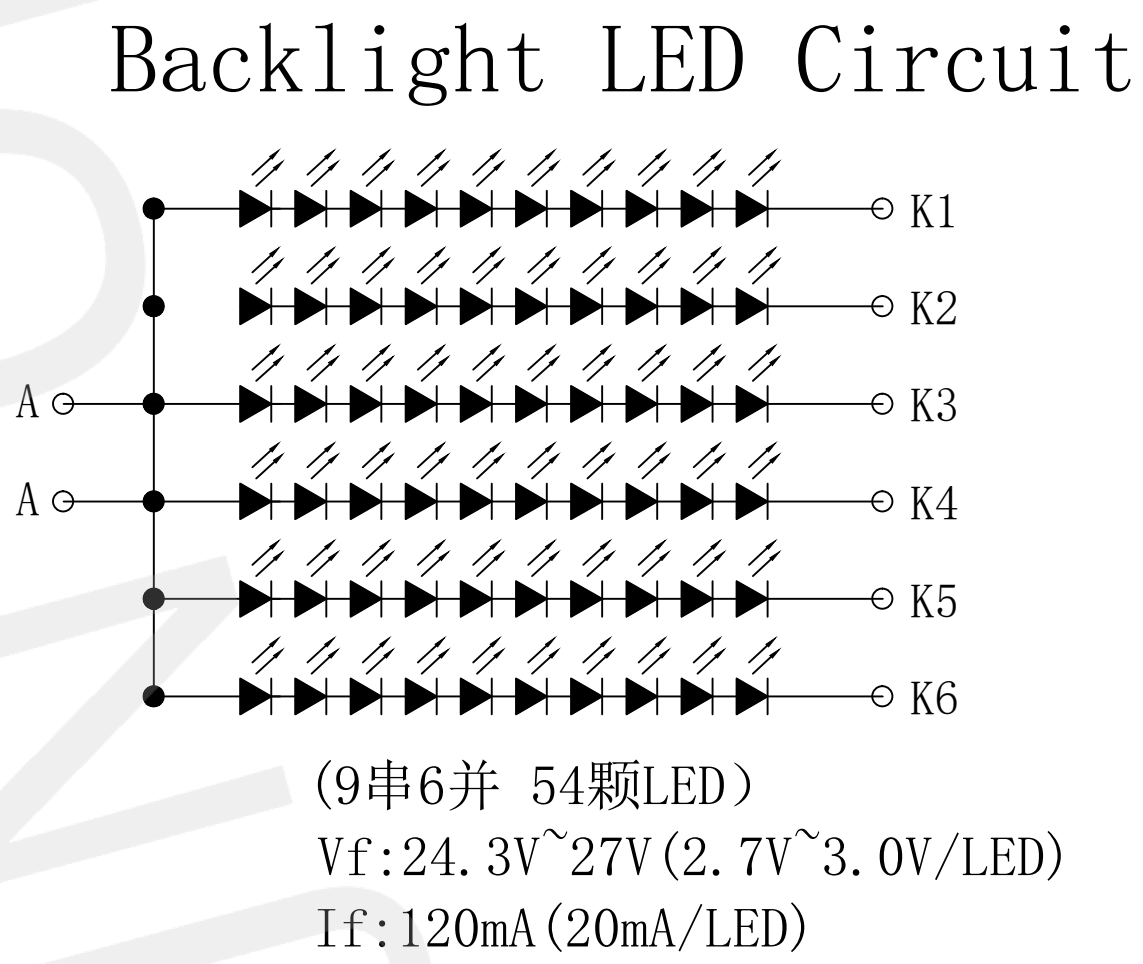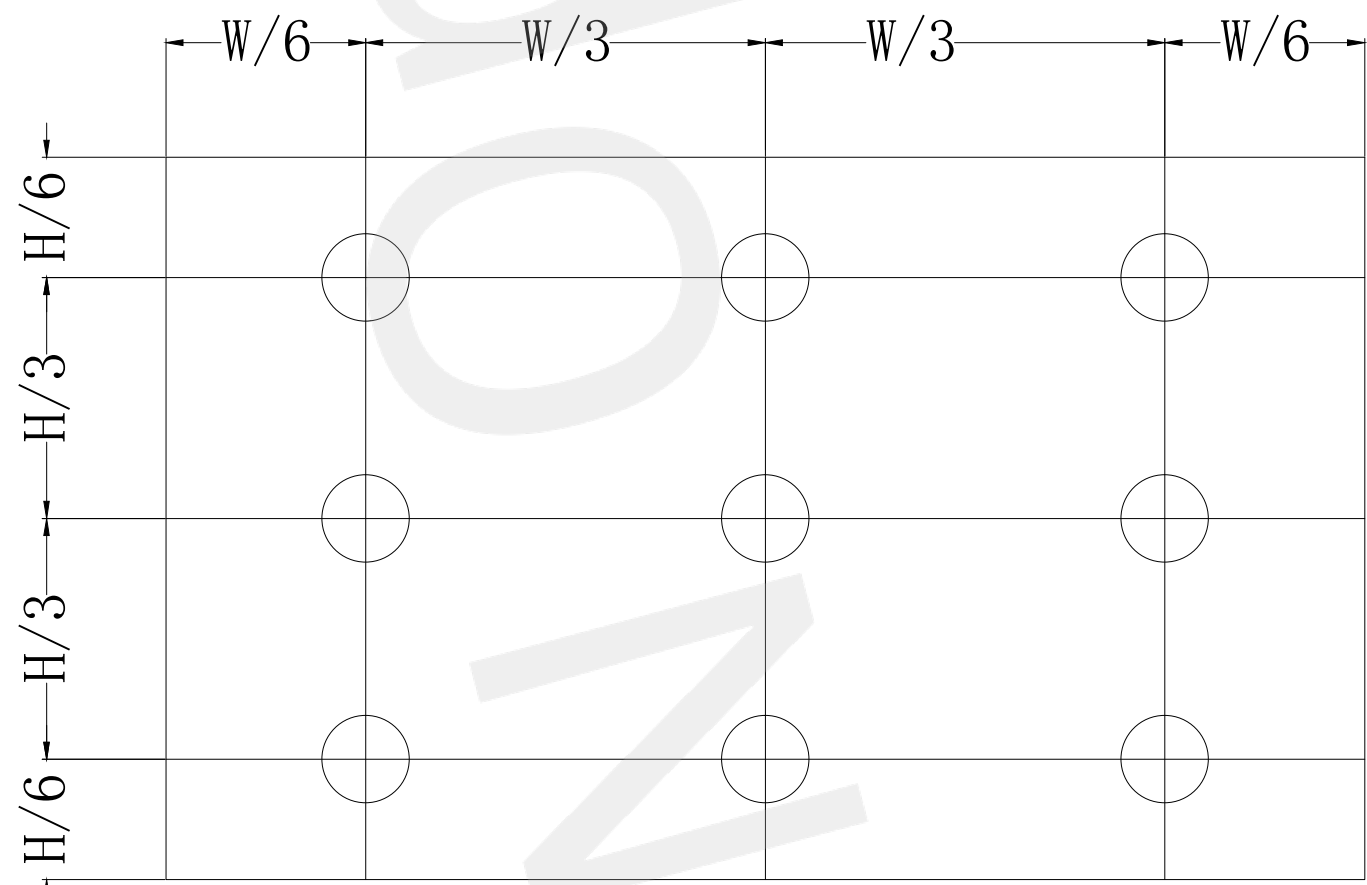

PIN NO.	SYMBOL
1	CABC_EN
2	H_GND
3	LANE1_N
4	LANE1_P
5	H_GND
6	LANE0_N
7	LANE0_P
8	H_GND
9	AUX_CH_P
10	AUX_CH_N
11	H_GND
12	LCD_VCC
13	LCD_VCC
14	NC
15	H_GND
16	H_GND
17	HPD
18	BL_GND
19	BL_GND
20	BL_GND
21	BL_GND
22	BL_ENABLE
23	BL_PWM
24	NC
25	NC
26	BL_POWER
27	BL_POWER
28	BL_POWER
29	BL_POWER
30	NC

Customer approve	DYN 帝晶光电 DJN OPTRONICS TECHNOLOGY CO., LTD.				
	Model No	90-0F630-7410D(Y)	Part No	SZA7317	
	Drawing Title	液晶显示模组	Drawn	彭伟峰	A0
	Drawing No	D-RD-058-26	Checked	周家欢	Unit MM
Scale 1:1	第三视角		Approve	金飞	Page 1/1

TOLERANCE TABLE (±)					
DIMENSION	1 GRADE	2 GRADE	3 GRADE	4 GRADE	5 GRADE
L ≤ 20	0.05	0.1	0.1	0.2	0.2
20 < L ≤ 50	0.1	0.15	0.2	0.25	0.25
50 < L ≤ 100	0.15	0.2	0.25	0.3	0.3
100 < L ≤ 200	0.2	0.25	0.3	0.4	0.4
200 < L	0.25	0.3	0.4	0.5	0.5
UNLESS OTHERWISE SPECIFIED					