





CG效果图

正视图

侧视图

背视图

NO.	CONTENT	DATE
A	NEW	20240418
M		
E		
N		
D		

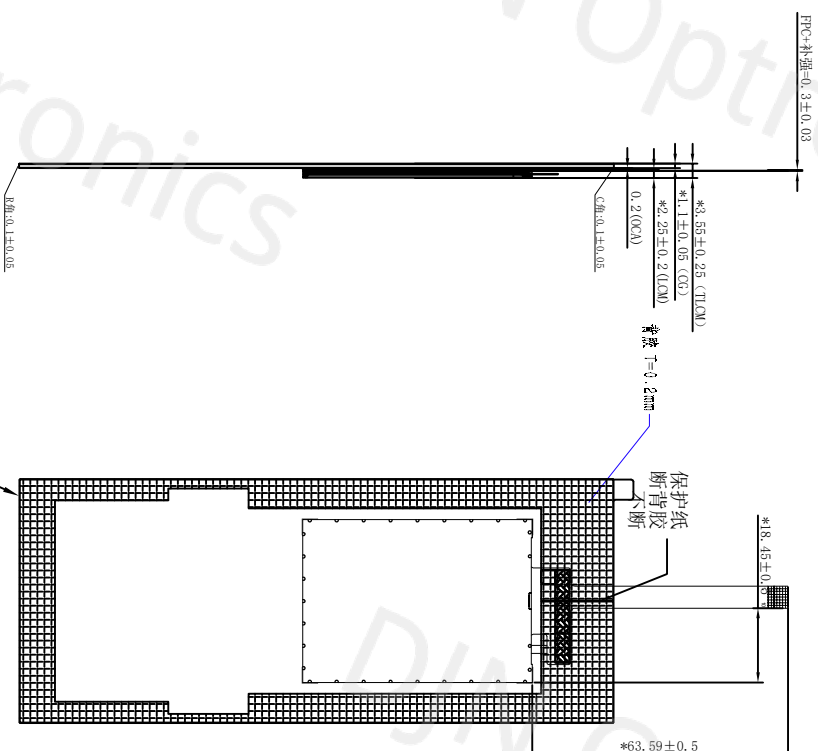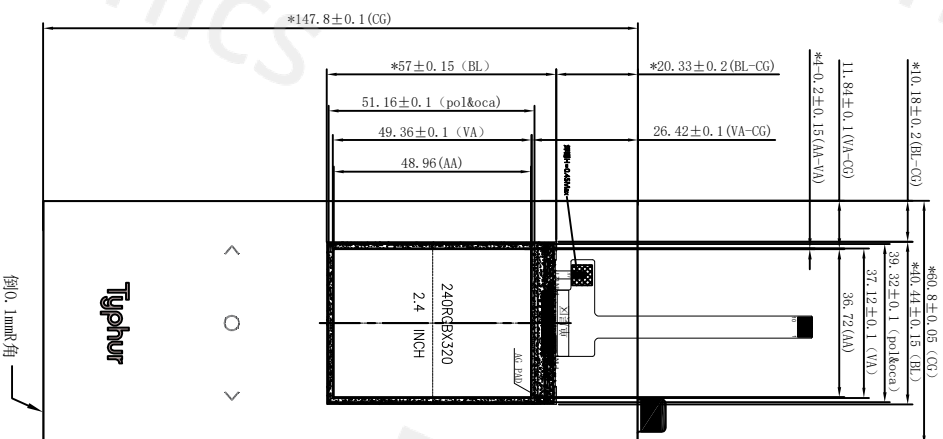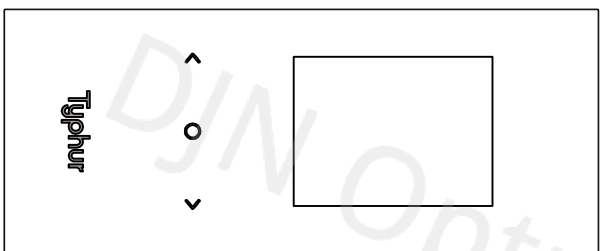

PIN NO	FUNCTION
1	BL-
2	BL+
3	NC
4	SPI RS
5	SPI SDA
6	GND
7	SPI SCL
8	SPI CSX
9	LCD RESET
10	3.3

1. 1: DED 尺寸: 2.4" (70/24.04V-A-N1-9P/0P/TS/24.04/320
2. 驱动IC: 51778993
3. CHEMICALITY COMPDNAME: x=0, y=0.03, z=0.36±0.03
厚度: 500.0μm, 550.0μm, 600.0μm
4. 均性≥80%, HTSC: 55% TP; CA: 1000 TP;
5. 工作电压: VCC: 2.4~3.3V
6. 工作温度: -20° C TO 70° C
7. 储存温度: -30° C TO 180° C
8. 功耗: 4 LDD 1=30, 0V IF=80mA
9. 未标注尺寸公差±0.3
PFO3料号: 83-02410-7115A

[illegible]

Customer approve		 DYN 帝星光电 DYN OPTRONICS TECHNOLOGY CO., LTD.	
Model No	98-93024-7115A	Part No	SZA6081
Drawing Title	全贴合成品	Drawn	尹赞伟
Drawing No	D-RD-082-24	Checked	覃东浩
Scale 1:1	第三视角	 Approve	李宇泽
			Page 1/1