
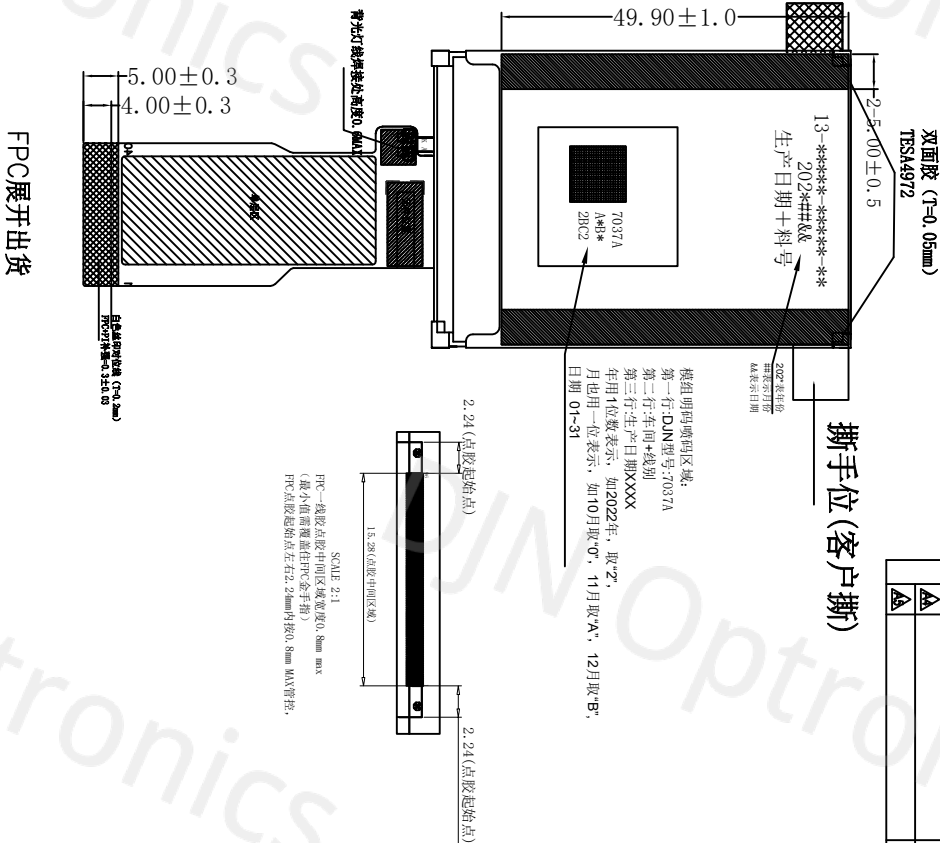
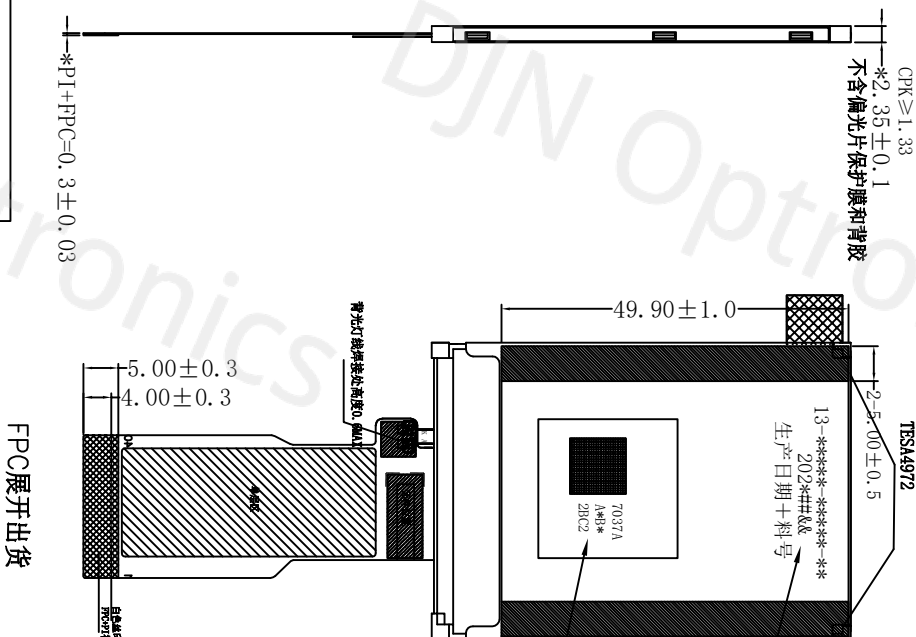


正视图

测视图


背视图

符合客户 环保要求	RoHS	NO.	CONTENT	DATE
保密等级 (秘密)		A	NEW	20230921
		M		20240125
		E		
		N		
		D		
		A		
		A		

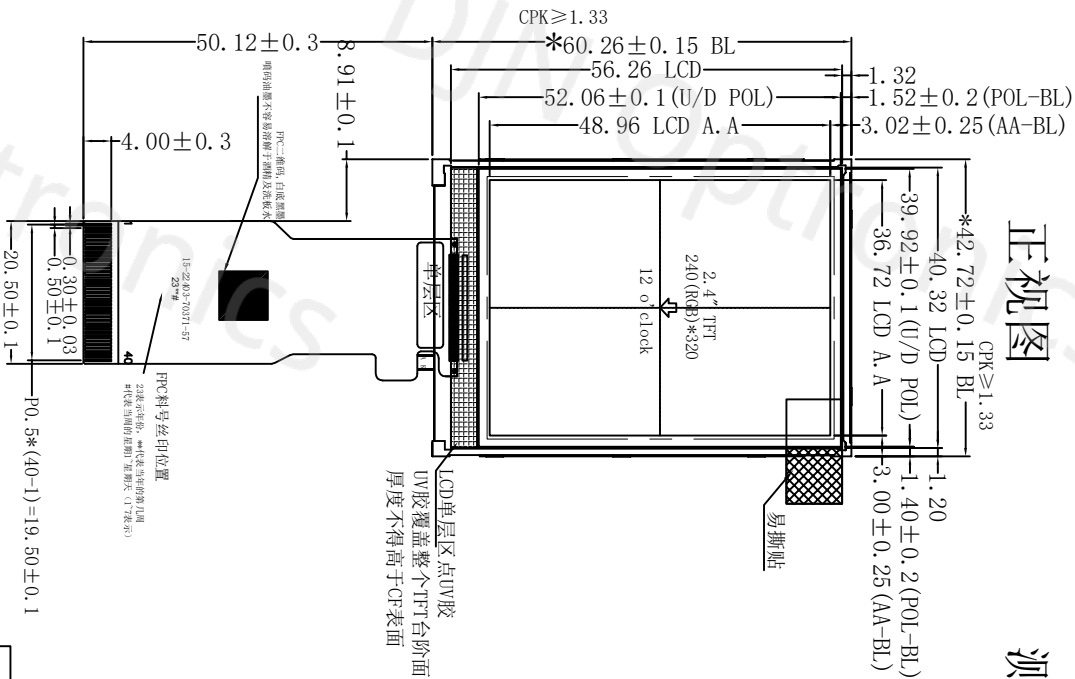

1	NC
2	NC
3	NC
4	NC
5	SOD
6	GND
7	IOVCC
8	VCC
9	SDA
10	CS
11	RST
12	RST
13	RO
14	DB0
15	DB1
16	DB2
17	DB3
18	DB4
19	DB5
20	DB6
21	DB7
22	DB8
23	DB9
24	DB10
25	DB11
26	DB12
27	DB13
28	DB14
29	DB15
30	RESET
31	GND
32	LED-A
33	LED-A
34	LED-A
35	LED-A
36	LED-A
37	IM0
38	GND
39	IM1
40	IM2

- 1: LCD 尺寸/型号: 2.4" CT024TN01 V.X/TN/240*320
- 2: 驱动IC: ST77893
- 3: CHROMATICITY COORDINATE: x=0.283±0.03, y=0.283±0.03 (按照实测数据为准); 亮度: 350cd/㎡ min, 450cd/㎡ TYP 色温: 10000K/±2000 (以色坐标为准)
- 4: F0U类型: 上灯0.13/下灯0.13mm
- 5: 工作电压: VCC: 2.8-3.3V
- 6: 工作温度: -20° C TO +70° C
- 7: 储存温度: -30° C TO +80° C
- 8: 背光: 4 LED I=3.0V If=80ma
- 9: 未标注尺寸公差±0.3
- 10: FPC料号: 83-02440-7037A



IM0 上拉10K电阻
M1 下拉10K
M2 下拉10K
IM3 上拉固定拉高

Customer approve			
Model No	90-02440-7037A	Part No	SZAS376
Drawing Title	液晶显示模组	Drawn	尹赞伟
Drawing No	D-RD-201-23	Checked	覃东浩
Scale 1:1	第三视角	Approve	金飞
		Unit	MM
		Page	1/1