



效果图

正视图




侧视图

背视图

NO.	CONTENT	DATE
NEW	20250821	
NEW	20251022	
NEW	20260112	

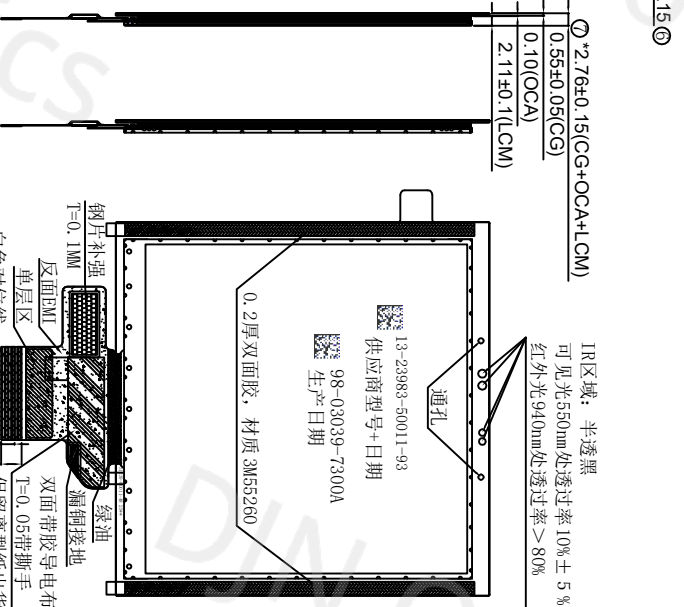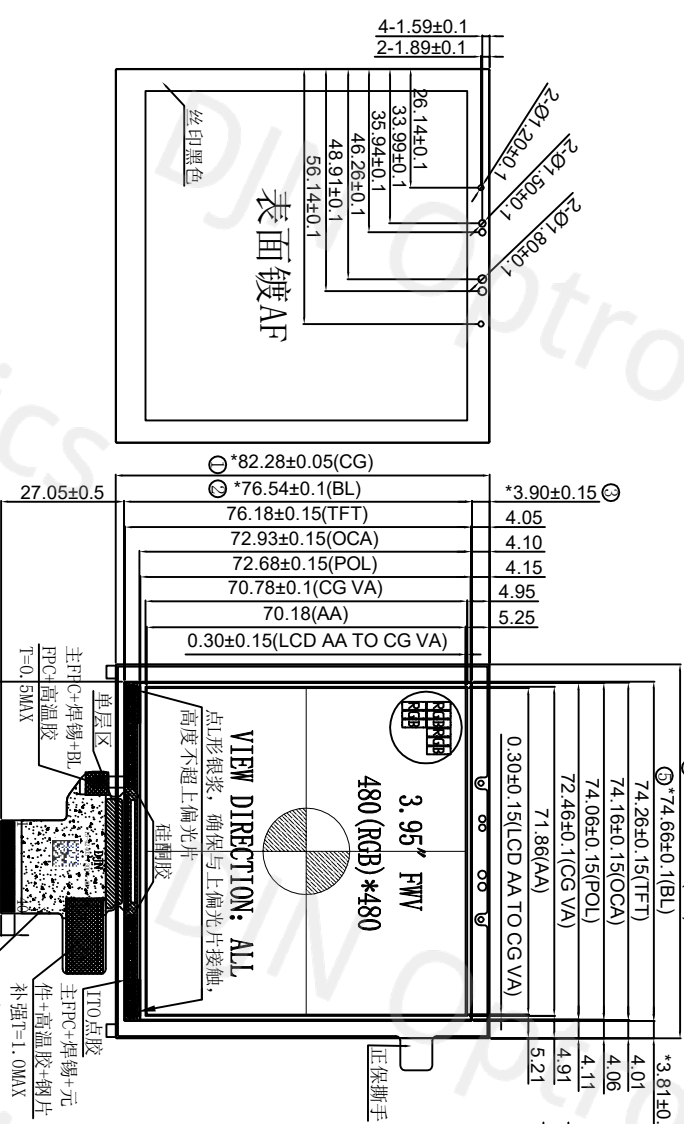


No.	Symbol
21	DB5 1 LEDA
22	DB6 2 LEDK1
23	DB7 3 LEDK2
24	DB8 4 GND
25	DB9 5 VCI
26	DB10 6 RESET
27	DB11 7 NC
28	DB12 8 NC
29	DB13 9 SDA
30	DB14 10 SCK
31	DB15 11 CS
32	DB16 12 PCIA
33	DB17 13 DE
34	GND 14 VSYNC
35	TP_INT 15 HSYNC
36	TP_SDA 16 DB0
37	TP_SCL 17 DB1
38	TP_RESET 18 DB2
39	TP_VCI 19 DB3
40	GND 20 DB4

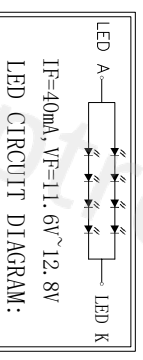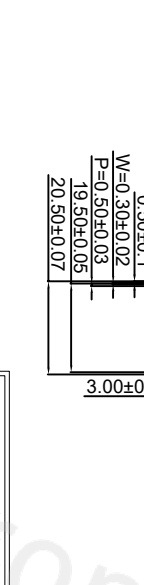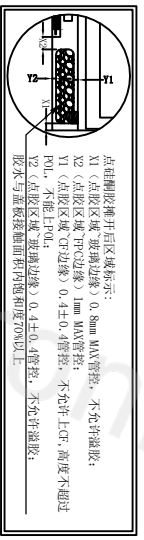

FPC展开包装出货
盖板面朝下放置

帝昂二维码喷码规则

- 技术参数:
1. 产品结构: LCM+CG结构;
 2. 显示类型: 3.95" FW TFT, 16, 7M COLOR, TRANSMISSIVE/NORMALLY BLACK;
 3. LCD型号: BOE/G040260-180(O,4T), 1C型号: S7T102-G6;
 4. 模组规格: 量测LCD方向的可视角度, CR>10, 80°/80°/80°/80°/85°/85°/85°/85° (typ);
 5. 盖板规格: T=0.55mm 旭硝子AS2, CS≥450μm, DOL≥8μm, 4PR≥450μm, 光源间距27.5;
 6. 盖板表面处理: 需镀AF (喷涂、蒸镀), 初始水滴角>110°, AF与非AF状态下表面硬度≥6H(750gf);
 7. FPC使用无胶电解铜: PFC表面能: ≥32达因;
 8. 背光LED: 8 LED S, AS2P, 电流电压: VF=12±1.8V, IF=40mA;
 9. 光学参数: 二合一亮度: 300cd/㎡ (MIN), 350cd/㎡ (均), 均匀性≥80%, NTSC≥65% 色坐标 (CEI1931): X=0.30±0.03, Y=0.31±0.03;
 10. 存储温度: -30° C~70° C, 工作温度: -20° C~80° C;
 11. 尺寸标记: *: 重点必测尺寸 (): 参考尺寸有需求才测量; ①: 尺寸编号 (有全尺寸测量要求时使用);
 13. 未标注尺寸公差: ±0.2, 平整度 ≤0.3mm;
 14. 模组背面离壳壳盖建议有0.3mm或以上的间隙 (不含泡棉或PET)。
14. 环保要求: ROHS;
- FPC料号: 83-43940-7300A



Customer approve	
Model No	98-03039-7300A
Drawing Title	全贴合成品
Drawing No	D-RD-060-25
Scale 1:1	第三视角
Part No	SZA6985
Drawn	叶才禄
Checked	周家乾
Approve	金飞

帝昂二维码喷码规则	
二值码位数: 1-5 6-7 8 9-10 11 12 13~15	
内容: 7300A YY M DD A B XXX	
1 5	7300A
6 7	YY
8 9-10	M DD
11 12	A B
13~15	XXX