

正视图

侧视图

背视图

NO.	CONTENT	DATE
NEW		2023-09-22
A		
B		
C		
D		

符合客户环保要求

符合《MSP-L-008-001



无卤

REACH

RoHS


保密等级(秘密)

PIN ASSIGNMENT			
PIN	SYMBOL	PIN	SYMBOL
1	VCI	21	DOTCLK
2	ICVCC	22	HSYNC
3	GND	23	VSYNC
4	DB1	24	DE
5	DB2	25	RESET
6	DB3	26	SPI MOSI
7	DB4	27	SPI MISO
8	DB5	28	SPI-SCK
9	DB6	29	SPI-CS
10	DB7	30	SPI-DCK
11	DB8	31	LEDA
12	DB9	32	LEDA
13	DB10	33	LEDK
14	DB11	34	LEDK
15	DB13	35	CTP VDD
16	DB14	36	CTP-SCL
17	DB15	37	CTP-SDA
18	DB16	38	CTP-RESET
19	DB17	39	CTP-EVENT
20	GND	40	CTP-GND
NO.	CTP ASSIGNMENT		
1	VDD_3V3		
2	I2C_SCL		
3	I2C_SDA		
4	RESET		
5	CTP_EVENT		
6	DGND		

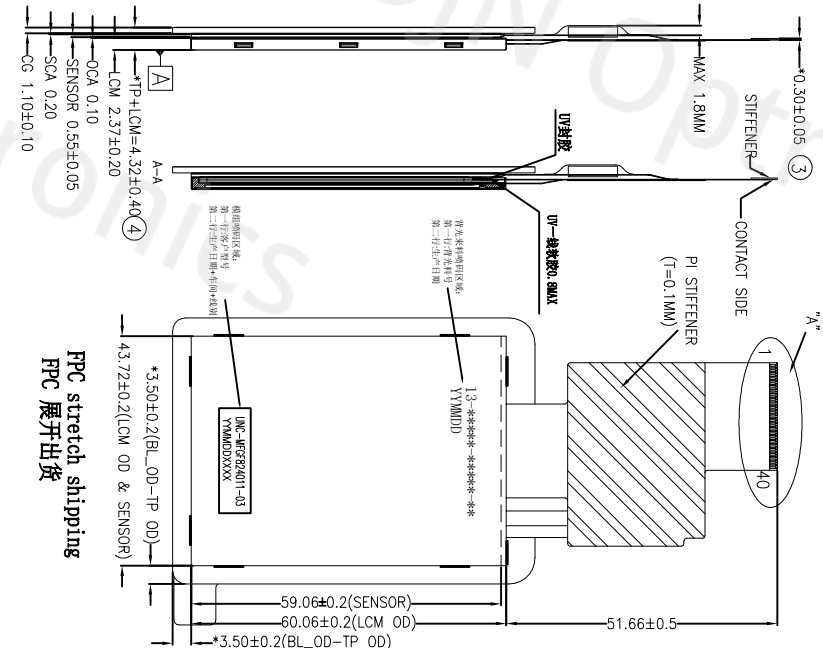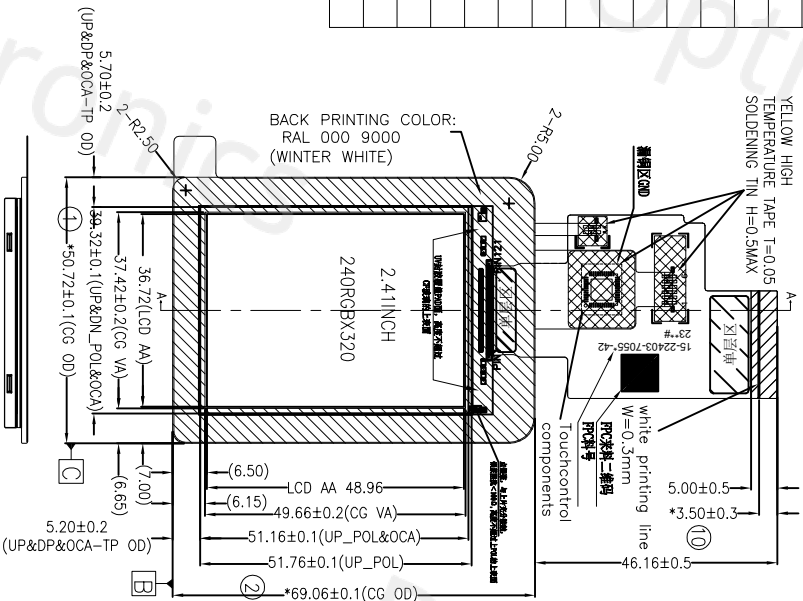


FPC stretch shipping
FPC 展开出货

FPC BENDING DIAGRAM
FPC弯折示意图

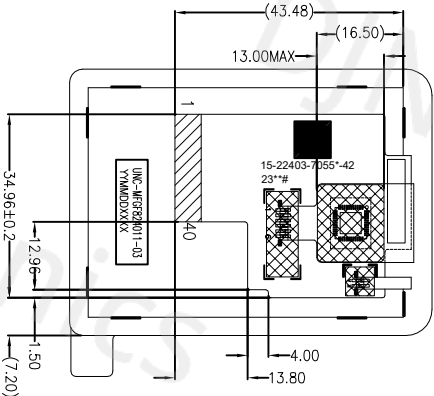

由Autodesk教育版产品制作

- NOTES:
- 1.DISPLAY MODE : 2.4" IPS;
 - 2.DRIVE IC: ST78879-C4-A, Optional interface/line 8bit serial I/F || 16-bit RGB; VCI & IONC: 3.0VTP, 5.3VMA;
 - 3.0°VIEW, VIEW DIRECTION: AL;
 4. Model luminance: 450cd/m² (with TP), 中心点亮度;
 - 均95性; 80% min 85% typ;
 - 5.背光: 4 LED; 461P, 20mA/Setting (Total 20mA), 10.8V (VDD), 12V (TP), 13.2V (Max) BACKLIGHT LIFE: 50000hrs (Ta=25°C, RH=60%±10%, When the LED luminous intensity attenuation to 50% at the beginning of the luminous intensity of 100%.)
 6. OPERATING TEMPERATURE: -30° C TO 70° C
 7. STORAGE TEMPERATURE: -30° C TO 80° C
 8. 其各为参考尺寸; A, B, C 为重要尺寸; 带球标为产线测量尺寸;
 9. CTP Structure (结构): 6+G, Cover glass/SCA/ITO GLASS, Transmittance: >85%;
 - 表面硬度: ≥3H (700G)
 - 表面店: 能抵抗常规的摩擦、过氧化学、酒精、石油醚、甘油等
 10. POC料号: 83-02440-7055A

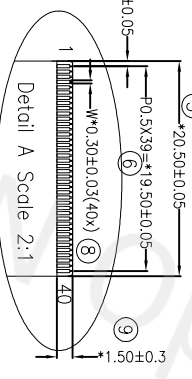

Customer approve		TP 封装	
COVER GLASS I:10		LEDA — 1 — 1 — LEDK	
SCA 0.2		15-22403-7055-42 23**#	
ITO GLASS 0.55			

Model No	98-13024-7056A	Part No	SZA5517
Drawing Title	全贴合成品	Drawn	康伟东
Drawing No	D-RD-262-23	Checked	周家乾
Scale 1:1	第三视角	Approve	陈泳雄

DJN 帝晶光电 SHEN ZHEN DJN PHOTOELECTRIC TECHNOLOGY CO.,LTD