


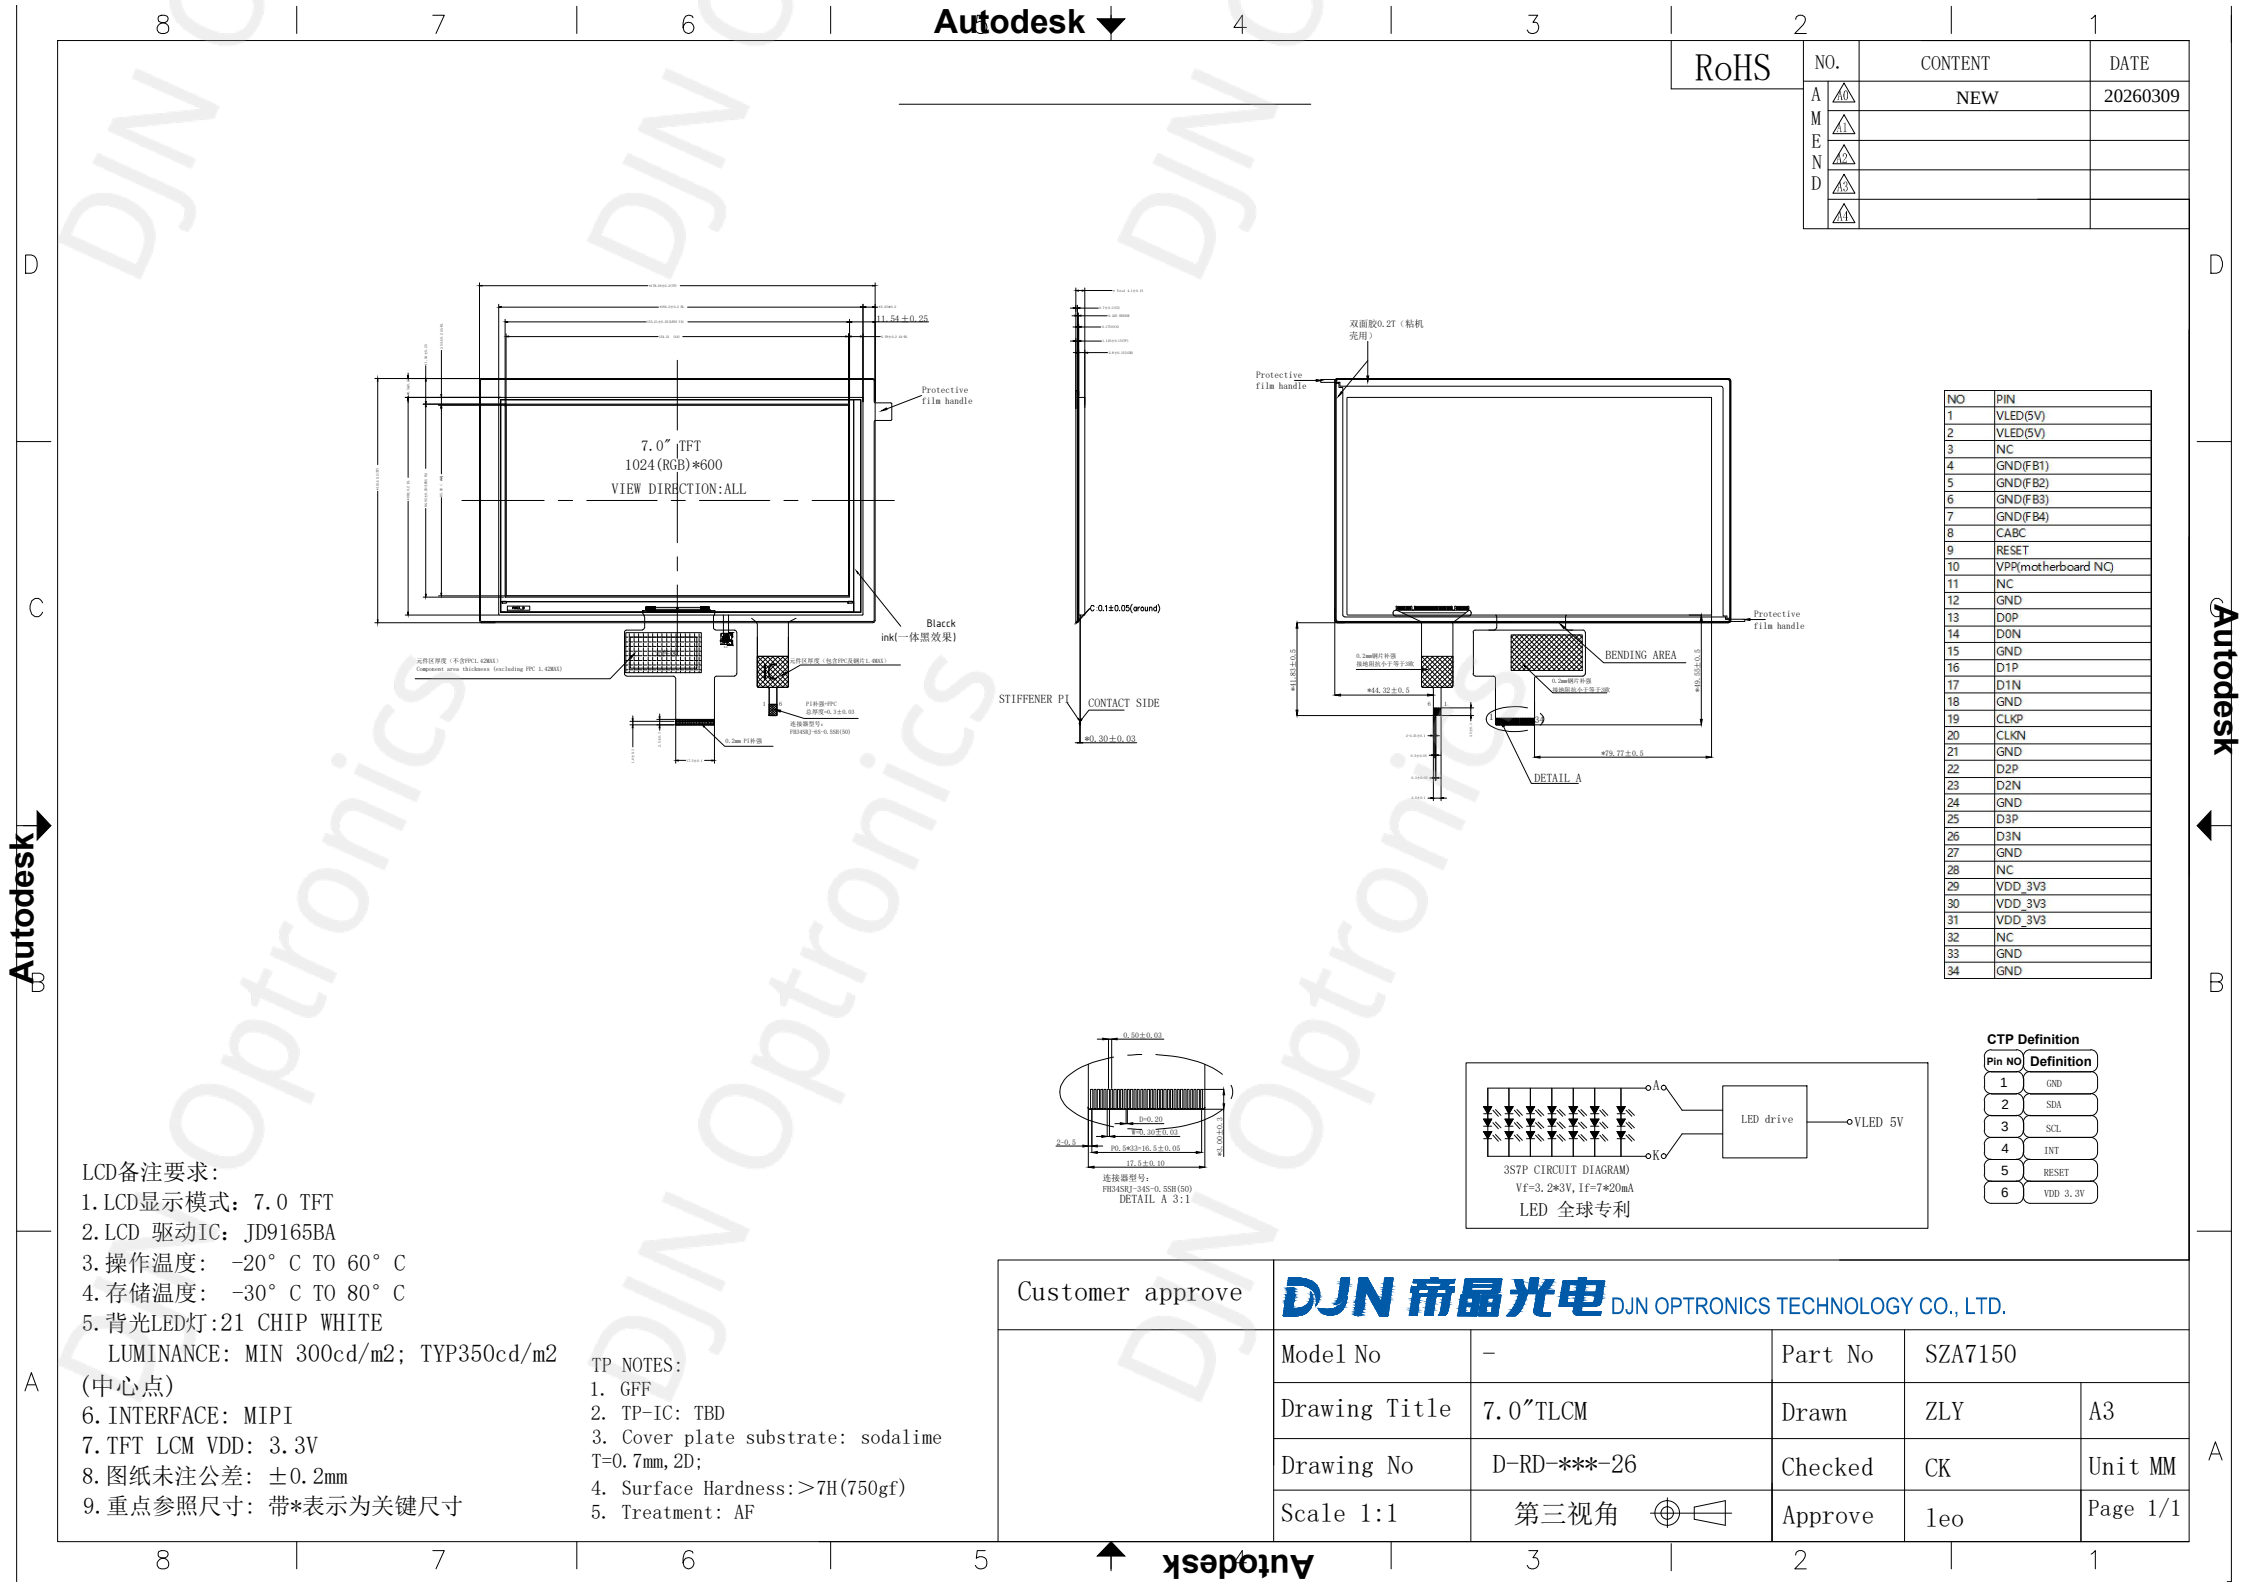

LCD备注要求:

1. LCD显示模式: 7.0 TFT
2. LCD 驱动IC: JD9165BA
3. 操作温度: -20° C TO 60° C
4. 存储温度: -30° C TO 80° C
5. 背光LED灯: 21 CHIP WHITE
LUMINANCE: MIN 300cd/m2; TYP350cd/m2 (中心点)
6. INTERFACE: MIPI
7. TFT LCM VDD: 3.3V
8. 图纸未注公差: ±0.2mm
9. 重点参照尺寸: 带*表示为关键尺寸

TP NOTES:

1. GFF
2. TP-IC: TBD
3. Cover plate substrate: sodalime
T=0.7mm, 2D;
4. Surface Hardness: >7H(750gf)
5. Treatment: AF

Customer approve

DJN 帝晶光电 DJN OPTRONICS TECHNOLOGY CO., LTD.

Model No	-	Part No	SZA7150		
Drawing Title	7.0" TLCM	Drawn	ZLY	A3	
Drawing No	D-RD-***-26	Checked	CK	Unit MM	
Scale 1:1	第三视角	Approve	leo	Page 1/1	