





CG效果图

正视图

侧视图

背视图

NO.	CONTENT	DATE
A	NEW	20240418
M		
E		
N		
D		

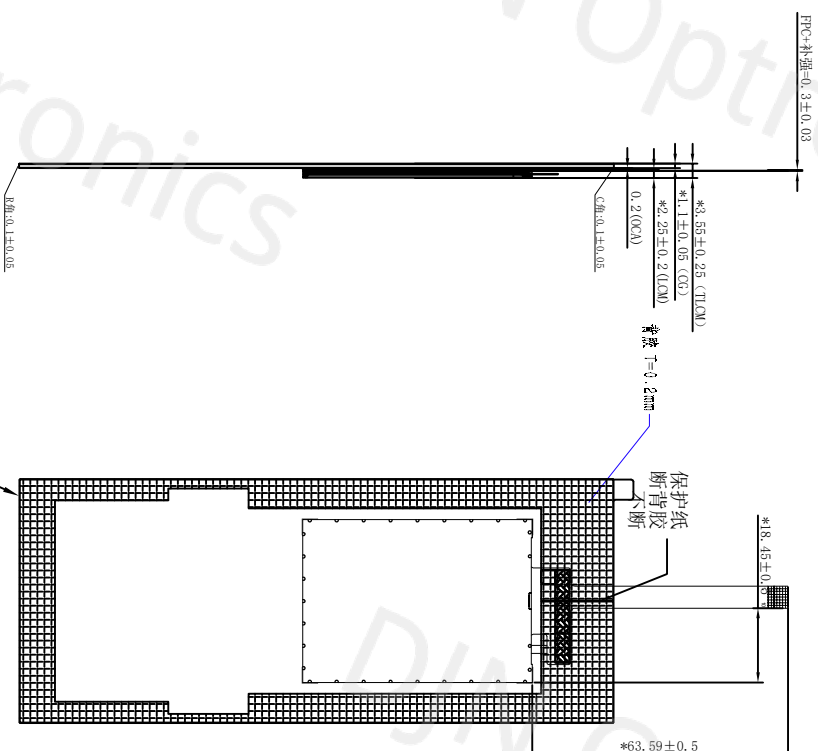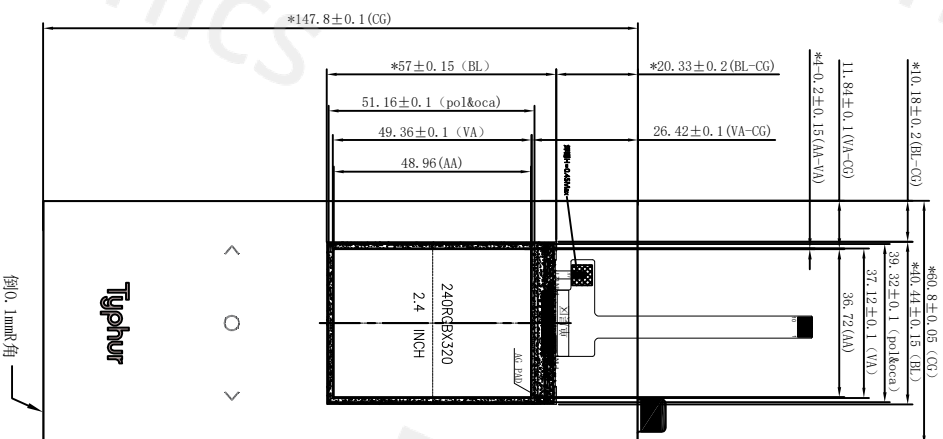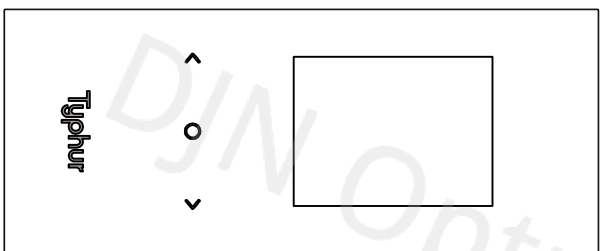

1. 1: DED 尺寸: 2.4" (70/24.04V-A-N1-9-PPV) / TFS / 24.04/320
2. 驱动IC: S7789983
3. CHEMICALITY COMPD NAME: $x=0.1, 0.3, y=0.35$ to 0.04
厚度: 500 μ d / μ MIN, 550 μ d / μ TP
均性 $\geq 80\%$, HTSC: 55% TT; CA: 1000 TT;
4. 工作电压: VCC: 2.4-3.3V
5. 工作温度: -20 $^{\circ}$ C TO 70 $^{\circ}$ C
6. 储存温度: -30 $^{\circ}$ C TO 180 $^{\circ}$ C
7. 零件号: 4 LDD 1=30, 0V IF=80mA
8. 标称尺寸公差 ± 0.3
9. F03标号: 83-02410-7115A

- [illegible]

PIN NO	FUNCTION
1	BL-
2	BL+
3	NC
4	SPI RS
5	SPI SDA
6	GND
7	SPI SCL
8	SPI CSX
9	LCD RESET
10	3.3

Customer approve		 DYN 帝星光电 DYN OPTRONICS TECHNOLOGY CO., LTD.	
Model No	98-93024-7115A	Part No	SZA6081
Drawing Title	全贴合成品	Drawn	尹赞伟
Drawing No	D-RD-082-24	Checked	覃东浩
Scale 1:1	第三视角	 Approve	李宇泽
			Page 1/1