


NO.	CONTENT	DATE
A	NEW	20250910
M	上POL外形更新,根据涂布外形更新,背光号更新	20251014
E	更新复合材料,PPC,CG,BL以及标注更新	20251129
D	面板区域值要求描述修改,缩略图更新	20260126



听槽尺寸图

正视图

侧视图

背视图

FPC弯折图

盖板面朝下

FPC弯折黏贴出货



PIN定义

NO.	CNO	NO.	CNO
1	VDD	39	VDD
2	VDD	40	VDD
3	VDD	41	VDD
4	VDD	42	VDD
5	VDD	43	VDD
6	VDD	44	VDD
7	VDD	45	VDD
8	VDD	46	VDD
9	VDD	47	VDD
10	VDD	48	VDD
11	VDD	49	VDD
12	VDD	50	VDD
13	VDD	51	VDD
14	VDD	52	VDD
15	VDD	53	VDD
16	VDD	54	VDD
17	VDD	55	VDD
18	VDD	56	VDD
19	VDD	57	VDD
20	VDD	58	VDD
21	VDD	59	VDD
22	VDD	60	VDD
23	VDD	61	VDD
24	VDD	62	VDD
25	VDD	63	VDD
26	VDD	64	VDD
27	VDD	65	VDD
28	VDD	66	VDD
29	VDD	67	VDD
30	VDD	68	VDD
31	VDD	69	VDD
32	VDD	70	VDD
33	VDD	71	VDD
34	VDD	72	VDD
35	VDD	73	VDD
36	VDD	74	VDD
37	VDD	75	VDD
38	VDD	76	VDD
39	VDD	77	VDD
40	VDD	78	VDD
41	VDD	79	VDD
42	VDD	80	VDD
43	VDD	81	VDD
44	VDD	82	VDD
45	VDD	83	VDD
46	VDD	84	VDD
47	VDD	85	VDD
48	VDD	86	VDD
49	VDD	87	VDD
50	VDD	88	VDD
51	VDD	89	VDD
52	VDD	90	VDD
53	VDD	91	VDD
54	VDD	92	VDD
55	VDD	93	VDD
56	VDD	94	VDD
57	VDD	95	VDD
58	VDD	96	VDD
59	VDD	97	VDD
60	VDD	98	VDD
61	VDD	99	VDD
62	VDD	100	VDD

NO.	CNO	NO.	CNO
1	VDD	39	VDD
2	VDD	40	VDD
3	VDD	41	VDD
4	VDD	42	VDD
5	VDD	43	VDD
6	VDD	44	VDD
7	VDD	45	VDD
8	VDD	46	VDD
9	VDD	47	VDD
10	VDD	48	VDD
11	VDD	49	VDD
12	VDD	50	VDD
13	VDD	51	VDD
14	VDD	52	VDD
15	VDD	53	VDD
16	VDD	54	VDD
17	VDD	55	VDD
18	VDD	56	VDD
19	VDD	57	VDD
20	VDD	58	VDD
21	VDD	59	VDD
22	VDD	60	VDD
23	VDD	61	VDD
24	VDD	62	VDD
25	VDD	63	VDD
26	VDD	64	VDD
27	VDD	65	VDD
28	VDD	66	VDD
29	VDD	67	VDD
30	VDD	68	VDD
31	VDD	69	VDD
32	VDD	70	VDD
33	VDD	71	VDD
34	VDD	72	VDD
35	VDD	73	VDD
36	VDD	74	VDD
37	VDD	75	VDD
38	VDD	76	VDD
39	VDD	77	VDD
40	VDD	78	VDD
41	VDD	79	VDD
42	VDD	80	VDD
43	VDD	81	VDD
44	VDD	82	VDD
45	VDD	83	VDD
46	VDD	84	VDD
47	VDD	85	VDD
48	VDD	86	VDD
49	VDD	87	VDD
50	VDD	88	VDD
51	VDD	89	VDD
52	VDD	90	VDD
53	VDD	91	VDD
54	VDD	92	VDD
55	VDD	93	VDD
56	VDD	94	VDD
57	VDD	95	VDD
58	VDD	96	VDD
59	VDD	97	VDD
60	VDD	98	VDD
61	VDD	99	VDD
62	VDD	100	VDD

丝印效果图

1. 材料: 根据225 2D T=0.08mm
2. 强化参数: CS>7000psi, DOL≥40mm, CT≤0.05mm
3. 表面硬度: ≥1000HV
4. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
5. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
6. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
7. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
8. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
9. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
10. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
11. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
12. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
13. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
14. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
15. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
16. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
17. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
18. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
19. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
20. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
21. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
22. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm
23. 材料厚度: 厚度≥0.15mm, 厚度≤0.15mm, 厚度≤0.15mm, 厚度≤0.15mm

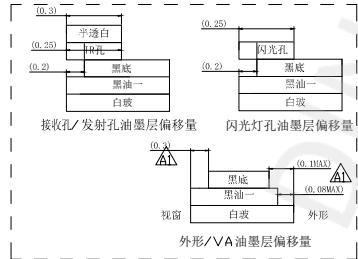

Customer approve

DYN 帝晶光电 DJN OPTRONICS TECHNOLOGY CO.LTD.

Model No	9A-3R067-1543B	Part No	SZA6779
Drawing Title	盲孔成品	Drawn	彭慧琼
Drawing No	D-RD-058-25	Checked	周家乾
Scale 1:1	第三视角	Approve	唐锐