



NO.	CONTENT	DATE
A	NEW	20230919
M		
E		
N		
D		

无卤 REACH RoHS
环保等级(标准)

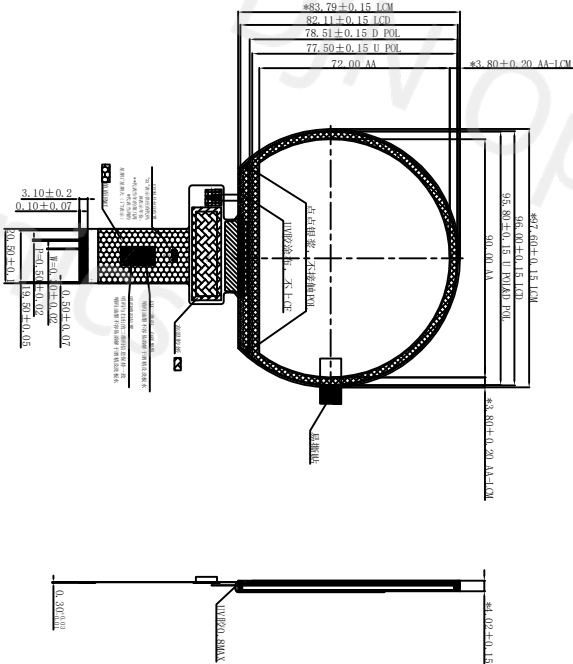

主视图


侧视图

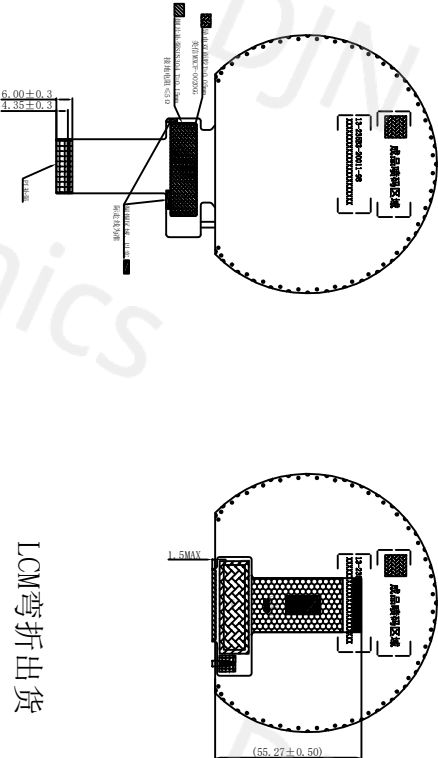

背视图

LCM弯折出货

LED CIRCUIT DIAGRAM:



If=180mA VF=16.8~20.4V

39	NC (XL)
38	NC (YL)
37	NC (XR)
36	GND
35	NC
34	DEN
33	USINC
32	HSINC
31	DISP
27	B6
26	B5
25	B4
24	B3
23	B2
22	B1
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSINC
33	USINC
34	DEN
35	NC
36	GND
37	NC (XR)
38	NC (YL)
39	NC (XL)
40	NC (YD)

TOLERANCE TABLE (±)

DIMENSION	1	2	3	4	5
L ≤ 20	0.05	0.1	0.1	0.2	0.25
20 < L ≤ 50	0.1	0.15	0.2	0.25	0.3
50 < L ≤ 100	0.15	0.2	0.25	0.3	0.5
100 < L ≤ 200	0.2	0.25	0.3	0.5	0.8
200 < L	0.25	0.3	0.5	0.8	1.0

Customer approve		Model No		Part No	
DUN 帝磊光电		90-03540-7071E		SZAS590-A	
SHEN ZHEN DUN PHOTOELECTRIC TECHNOLOGY CO.,LTD		Drawing Title		Drawn	
液晶显示模组		Drawing No		Checked	
D-RD-XXX-XX		Scale 1:1		Approve	
第三视角		李丹丹		Unit MM	
Page 1/1					

- NOTE:
1. DISPLAY MODE : 3.54 IPS , 16.7M COLOR STRANSMISSIVE, NORMALLY BLACK
 2. Driver IC: FL5893DA-G6
 3. Viewing Direction: ALL 0° Clock4. Operating Temperature: -35℃~+85℃. Storage Temperature: -40℃~+95℃
 6. Backlight Type: 12 White LEDs, 6串2并
 7. BL Input Current: 180 mA
 8. LCM Brightness: 1000 cd/m TYP
- 如果客户做全贴合, 考虑到LCM材料公差, LCM组装公差, CTP贴 合公差, CTP丝印公差, 建议CTP的丝印开窗在屏AA区单边外扩0.2MM标示” * 的尺寸为重卢管控尺寸
- 未注尺寸公差: ±0.2