




主视图

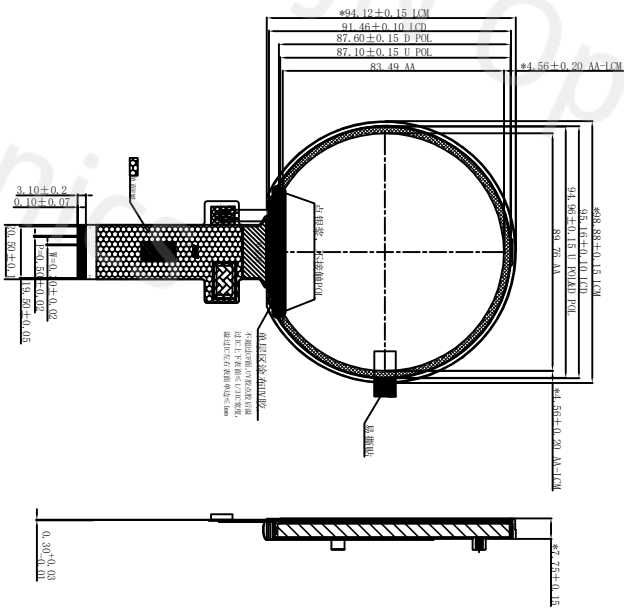


侧视图

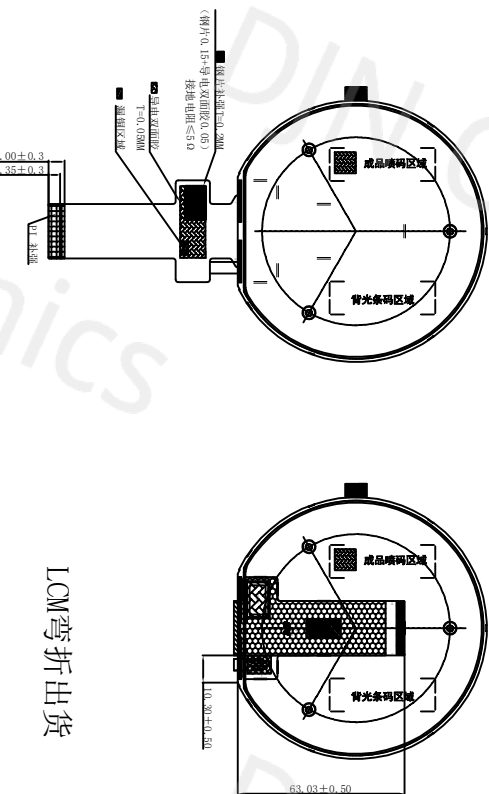

背视图

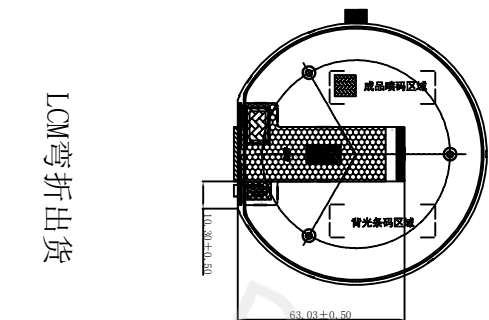

LCM弯折出货



NO.	CONTENT	DATE
A	NEW	20230919
M		
E		
N		
D		

1	LEDA
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	H SYNC
33	V SYNC
34	DEN
35	NC
36	GND
37	NC (R)
38	NC (T)
39	NC (L)
40	NC (U)

- NOTE:
1. DISPLAY MODE : 3.6 IPS , 16.7M COLOR STRANSMISSIVE, NORMALLY BLACK BOE/AV036KAU-N80 (0.4/0.4)
 2. Driver IC: ST72566
 3. Viewing Direction: ALL 0° Clock4. Operating Temperature: -35° - +85°
 5. Storage Temperature: -35° - +85°
 6. Backlight Type: 20 White LEDs, 5串4并
 7. BL Input Current: 180 mA
 8. LCM Brightness: 1000 cd/m TYP
- 如果客户做全贴合, 考虑到 LCM 材料公差, LCM 组装公差, CTP 贴 合公差, CTP 丝印公差, 建议 CTP 的丝印开窗在屏 AA 区单边外扩 0.2MM 标示” * ”的尺寸为重卢管控尺寸
- 未注尺寸公差: ±0.2

TOLERANCE TABLE (±)					
DIMENSION	1	2	3	4	5
L ≤ 20	0.05	0.1	0.1	0.2	0.25
20 < L ≤ 50	0.1	0.15	0.2	0.25	0.3
50 < L ≤ 100	0.15	0.2	0.25	0.3	0.5
100 < L ≤ 200	0.2	0.25	0.3	0.5	0.8
200 < L	0.25	0.3	0.5	0.8	1.0

Customer approve		Model No		Part No	
DUN 帝晶光电		90-03640-7070E		SZA5590	
Drawing Title		液晶显示模组		Drawn	
Drawing No		D-RD-XXX-XX		Checked	
Scale 1:1		第三视角		Approve	