
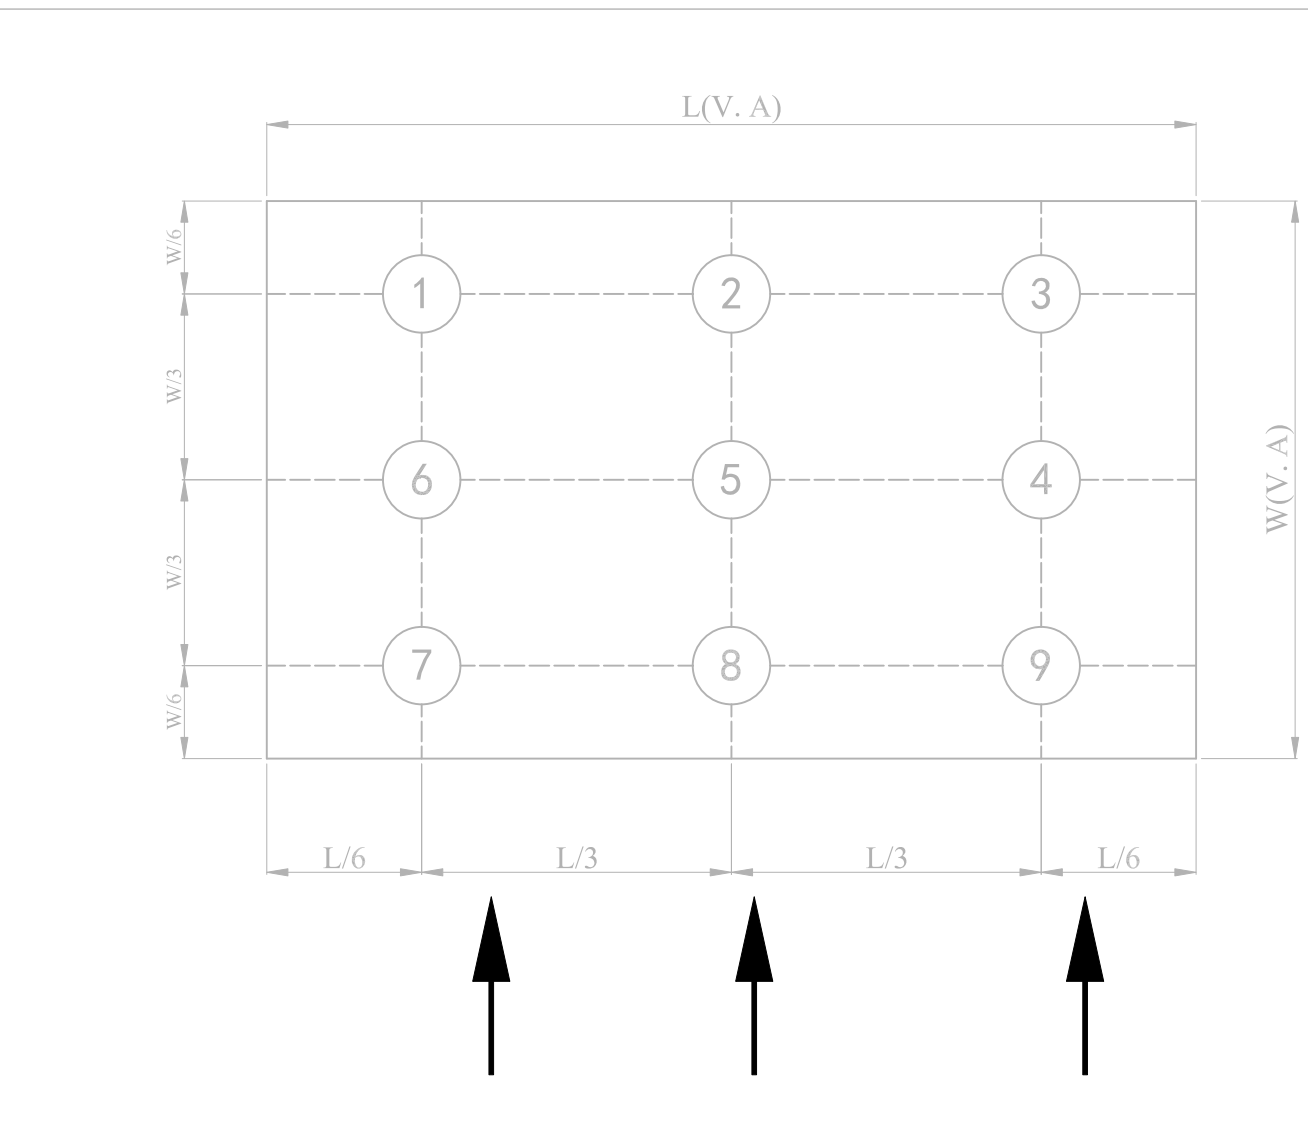
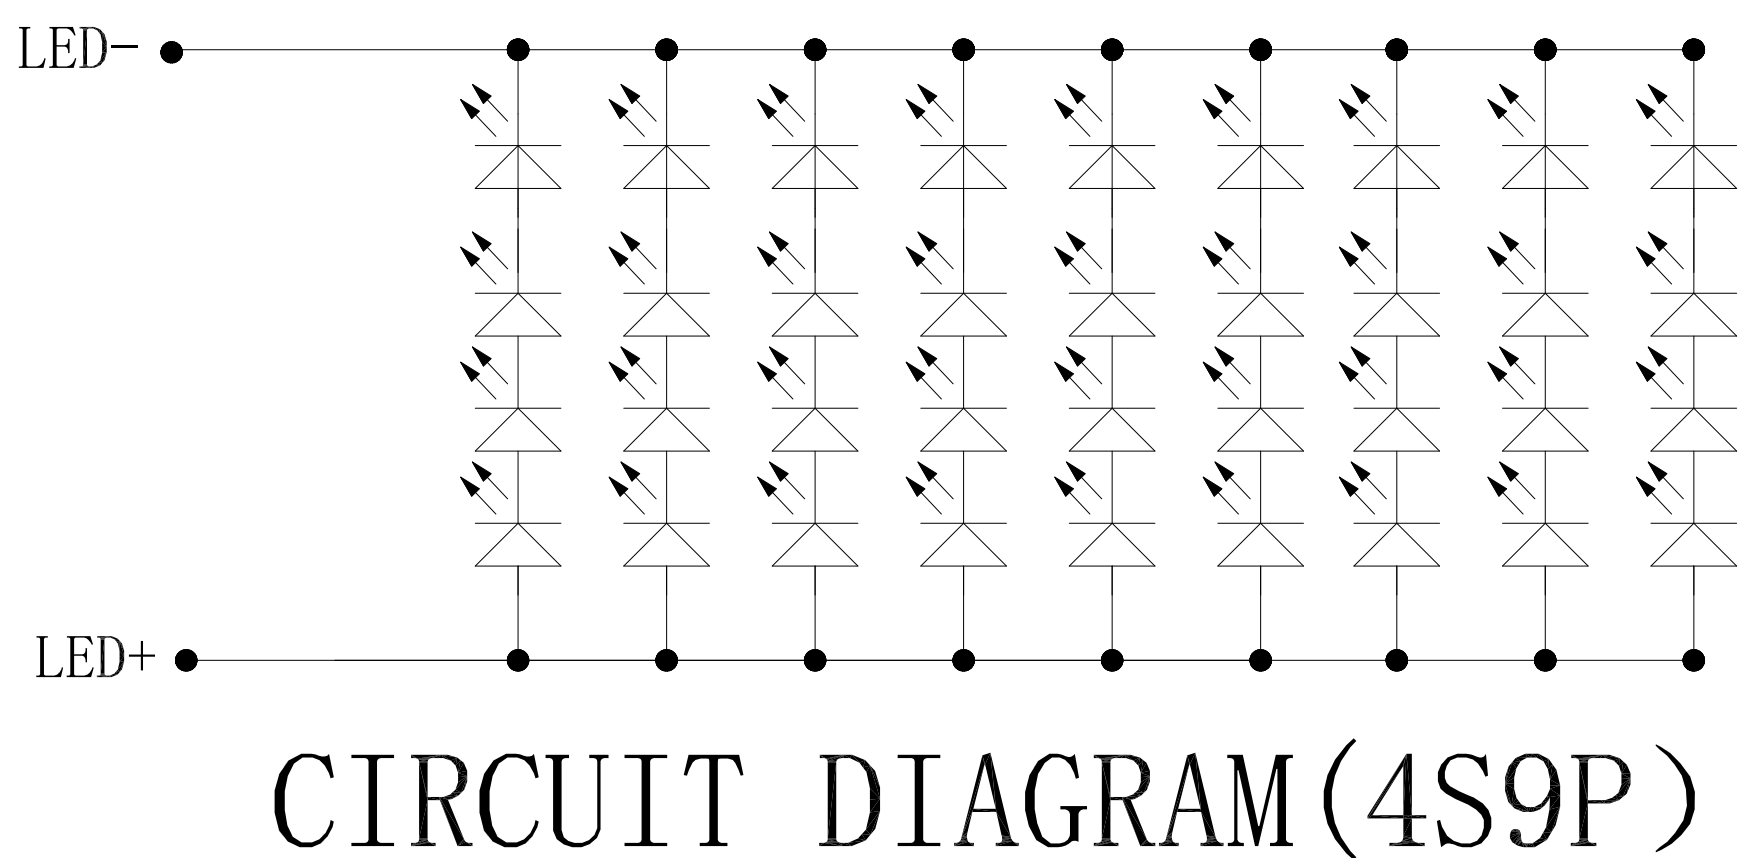
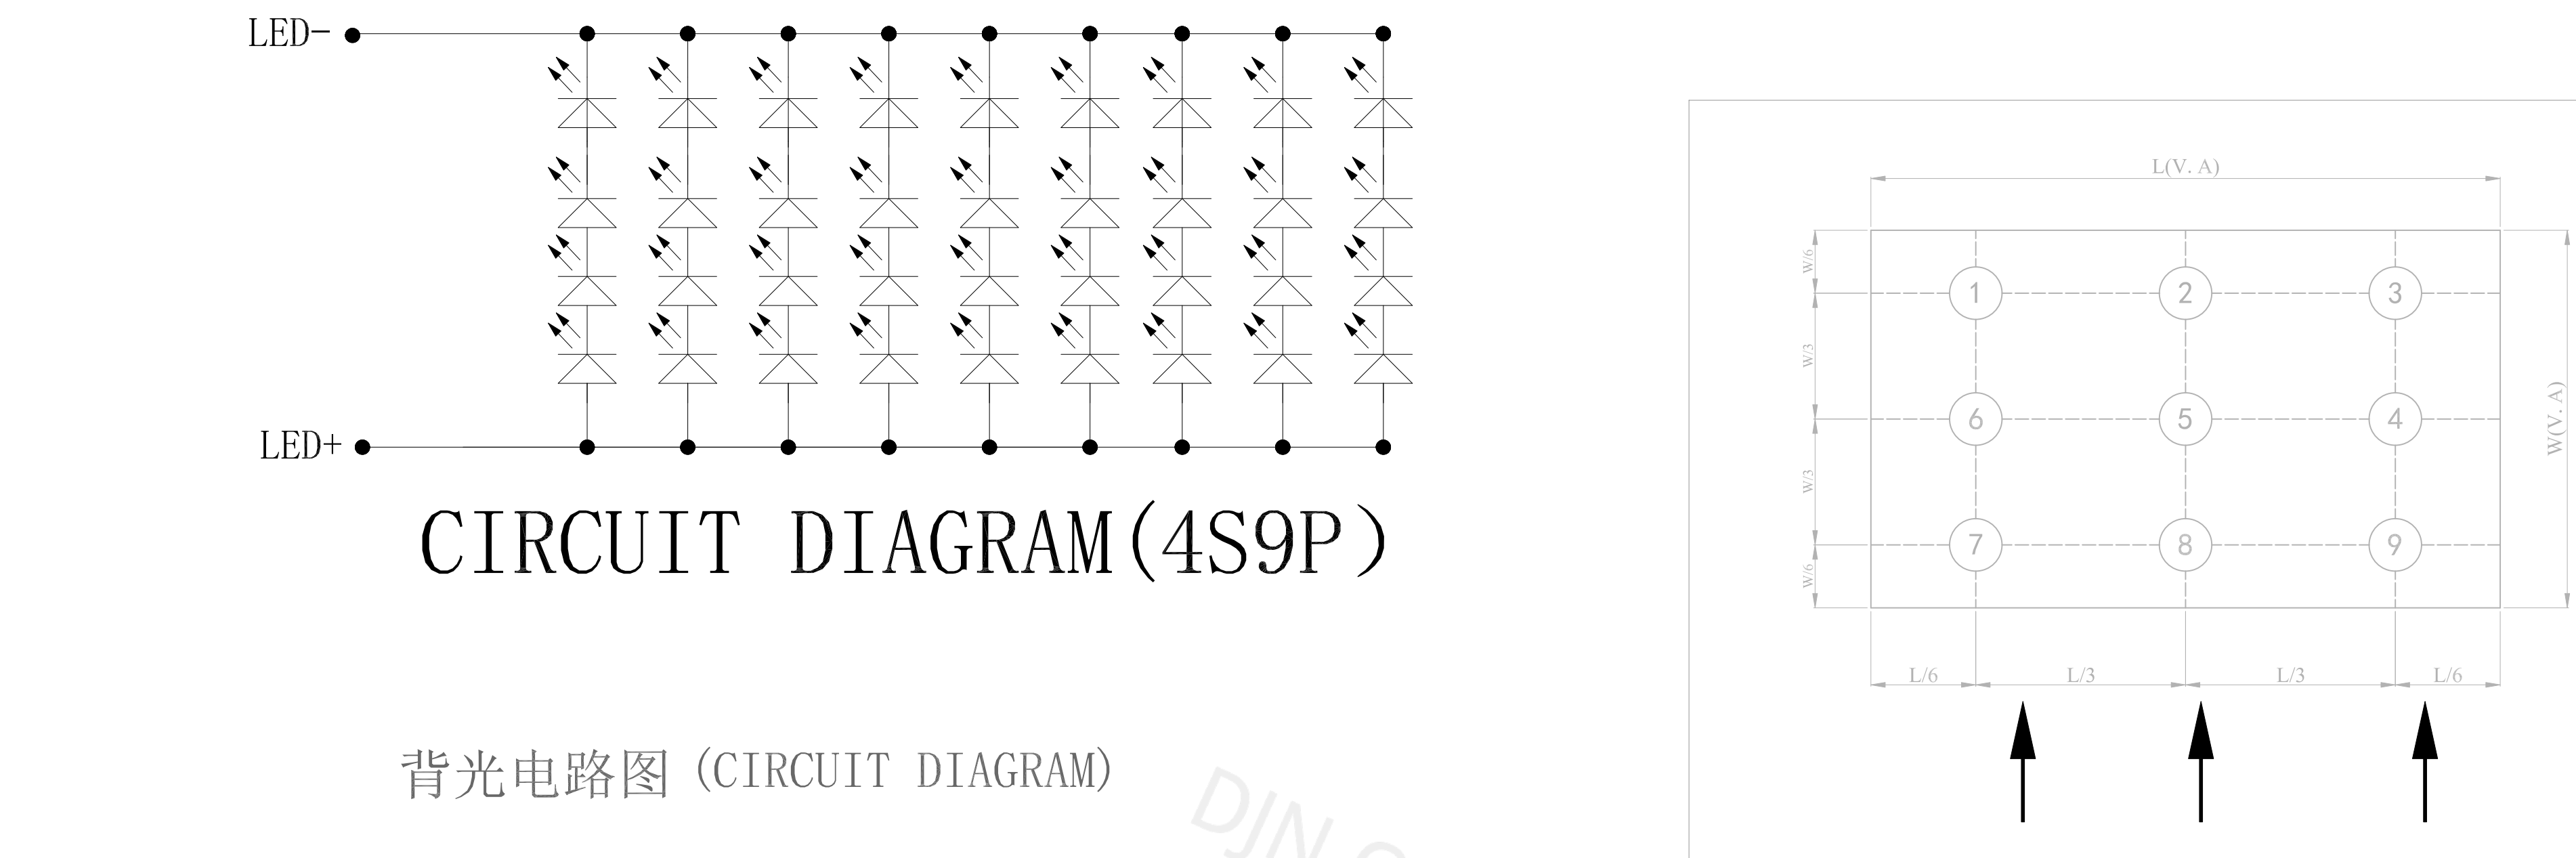
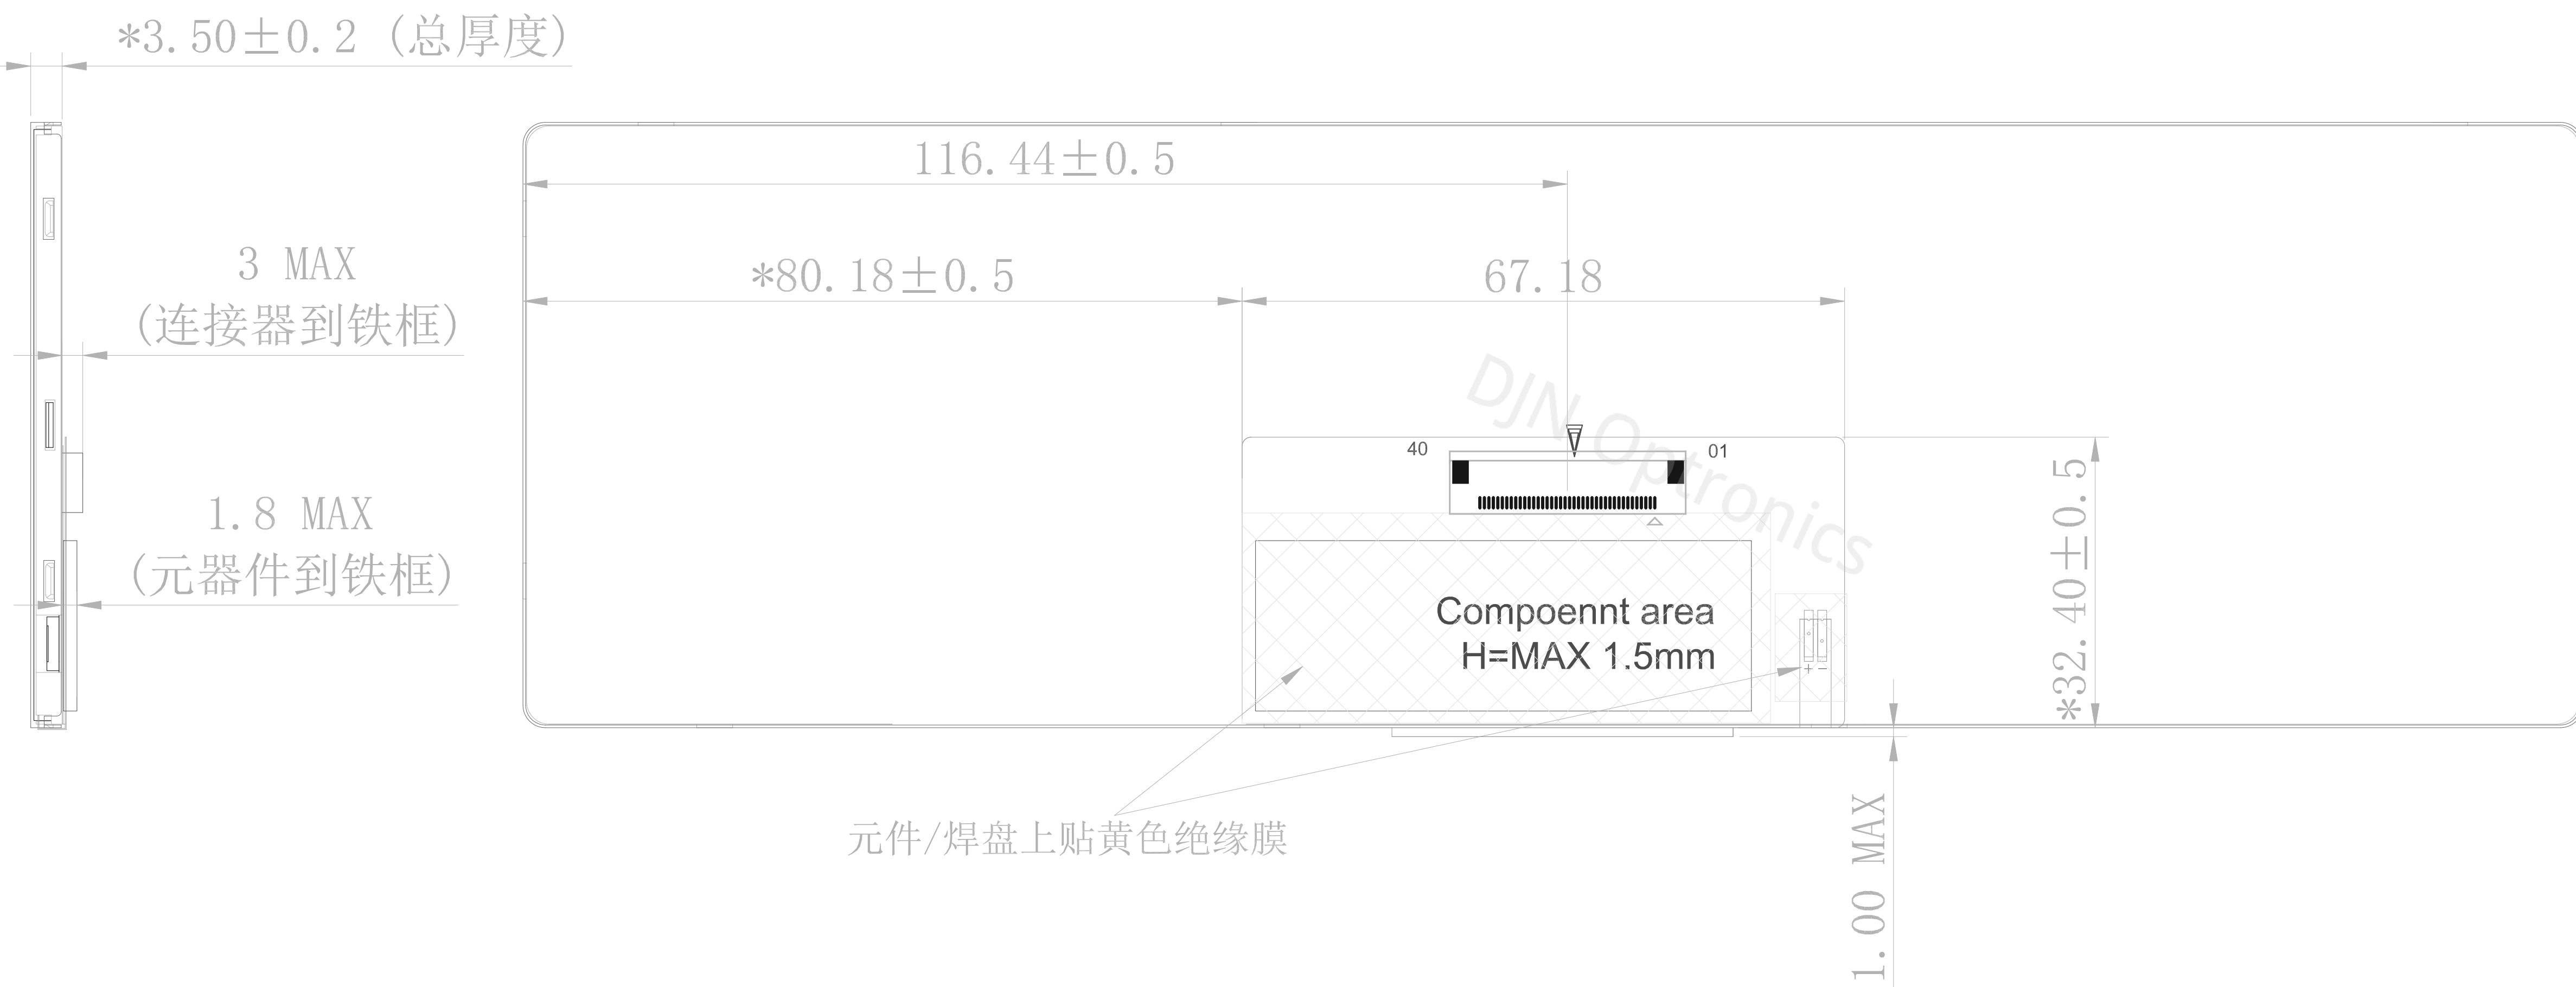


PIN	SYMBOL
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	Rxin0-
9	Rxin0+
10	GND
11	Rxin1-
12	Rxin1+
13	GND
14	Rxin2-
15	Rxin2+
16	GND
17	RxCLK-
18	RxCLK+
19	GND
20	Rxin3-
21	Rxin3+
22	GND
23	SDA
24	SCL
25	GND
26	CS
27	NC
28	LVBIT
29	NC
30	GND
31	LEDK-
32	LEDK-
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	LED+
40	LED+

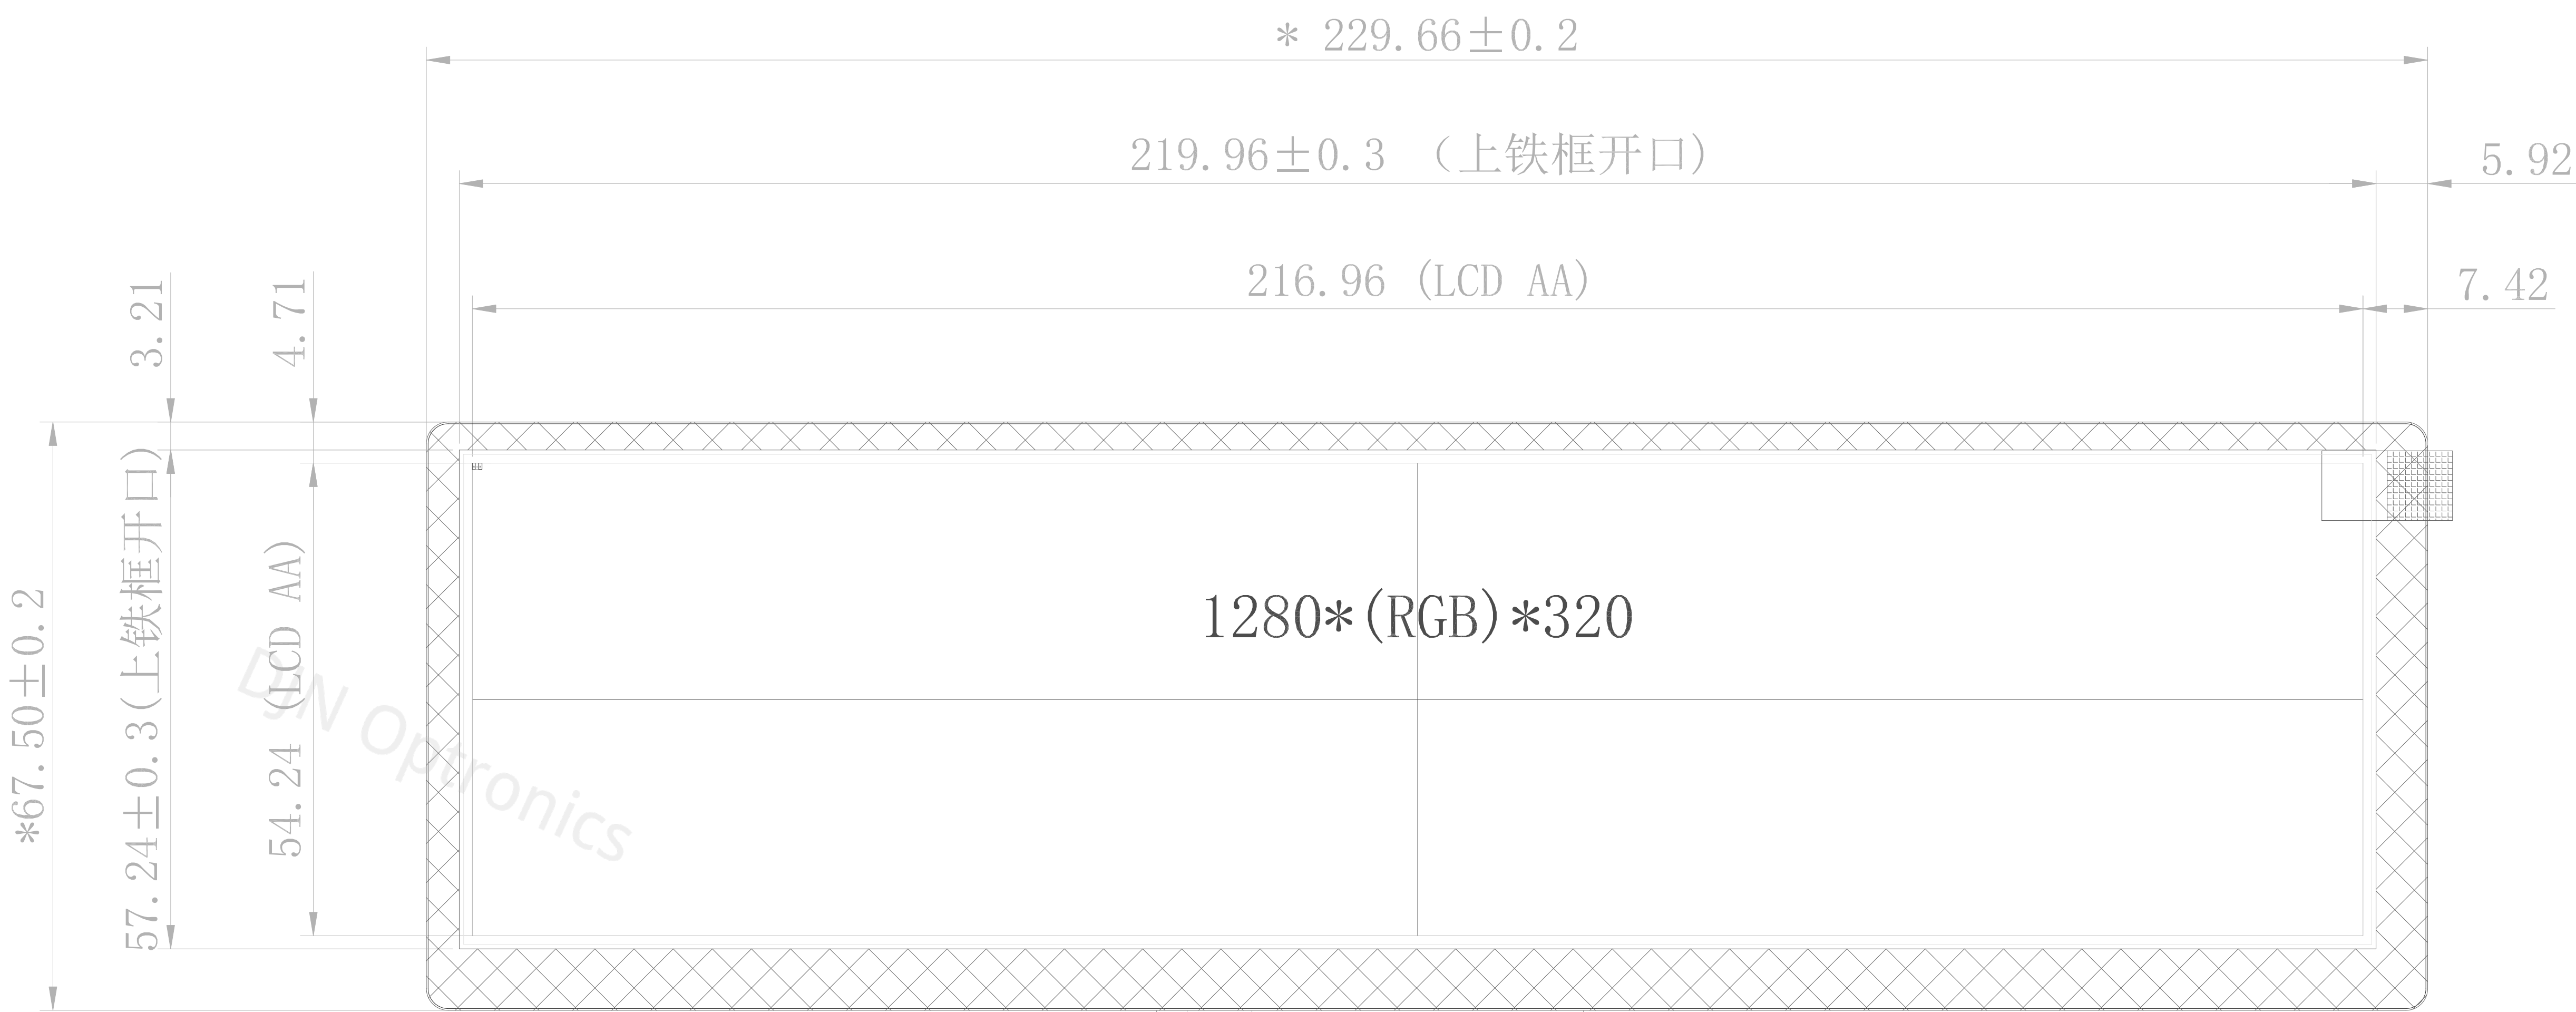

- LCM NOTES:
1. DISPLAY TYPE: 8.8 INCH TFT /TRANSMISSIVE
 2. BACKLIGHT: 36CHIP WHITE LED, 4S9P
 3. OPERATING TEMP: -20°C~+70°C
 4. STORAGE TEMP: -30°C~+80°C
 5. LCD IC: EK79202B1
 - 6.Luminance:400cd/m2(TYP), Cx=0.29±0.03; Cy=0.32±0.03
 7. "()"reference dimension."*"critical dimension
 8. RoHS Compliant

TOLERANCE TABLE(±)				
DIMENSION	1 GRADE	2 GRADE	3 GRADE	4 GRADE
L ≤ 20	0.05	0.1	0.1	0.2
20 < L ≤ 50	0.1	0.15	0.2	0.25
50 < L ≤ 100	0.15	0.2	0.25	0.3
100 < L ≤ 200	0.2	0.25	0.3	0.5
200 < L	0.25	0.3	0.5	0.8
UNLESS OTHERWISE SPECIFIED				

Customer approve	DYN 帝晶光电 SHEN ZHEN DJN PHOTOELECTRIC TECHNOLOGY CO.,LTD			
Model No	9G-21088-Z144H(Y)	Part No	9G-10088-Z144H(Y)	
Drawing Title	LCM	Drawn	钟东方	A0
Drawing No	DRAWINGNO	Checked	邝浩贤	Unit MM
Scale 1:1	第三视角	Approve	秦福军	Page 1/1