
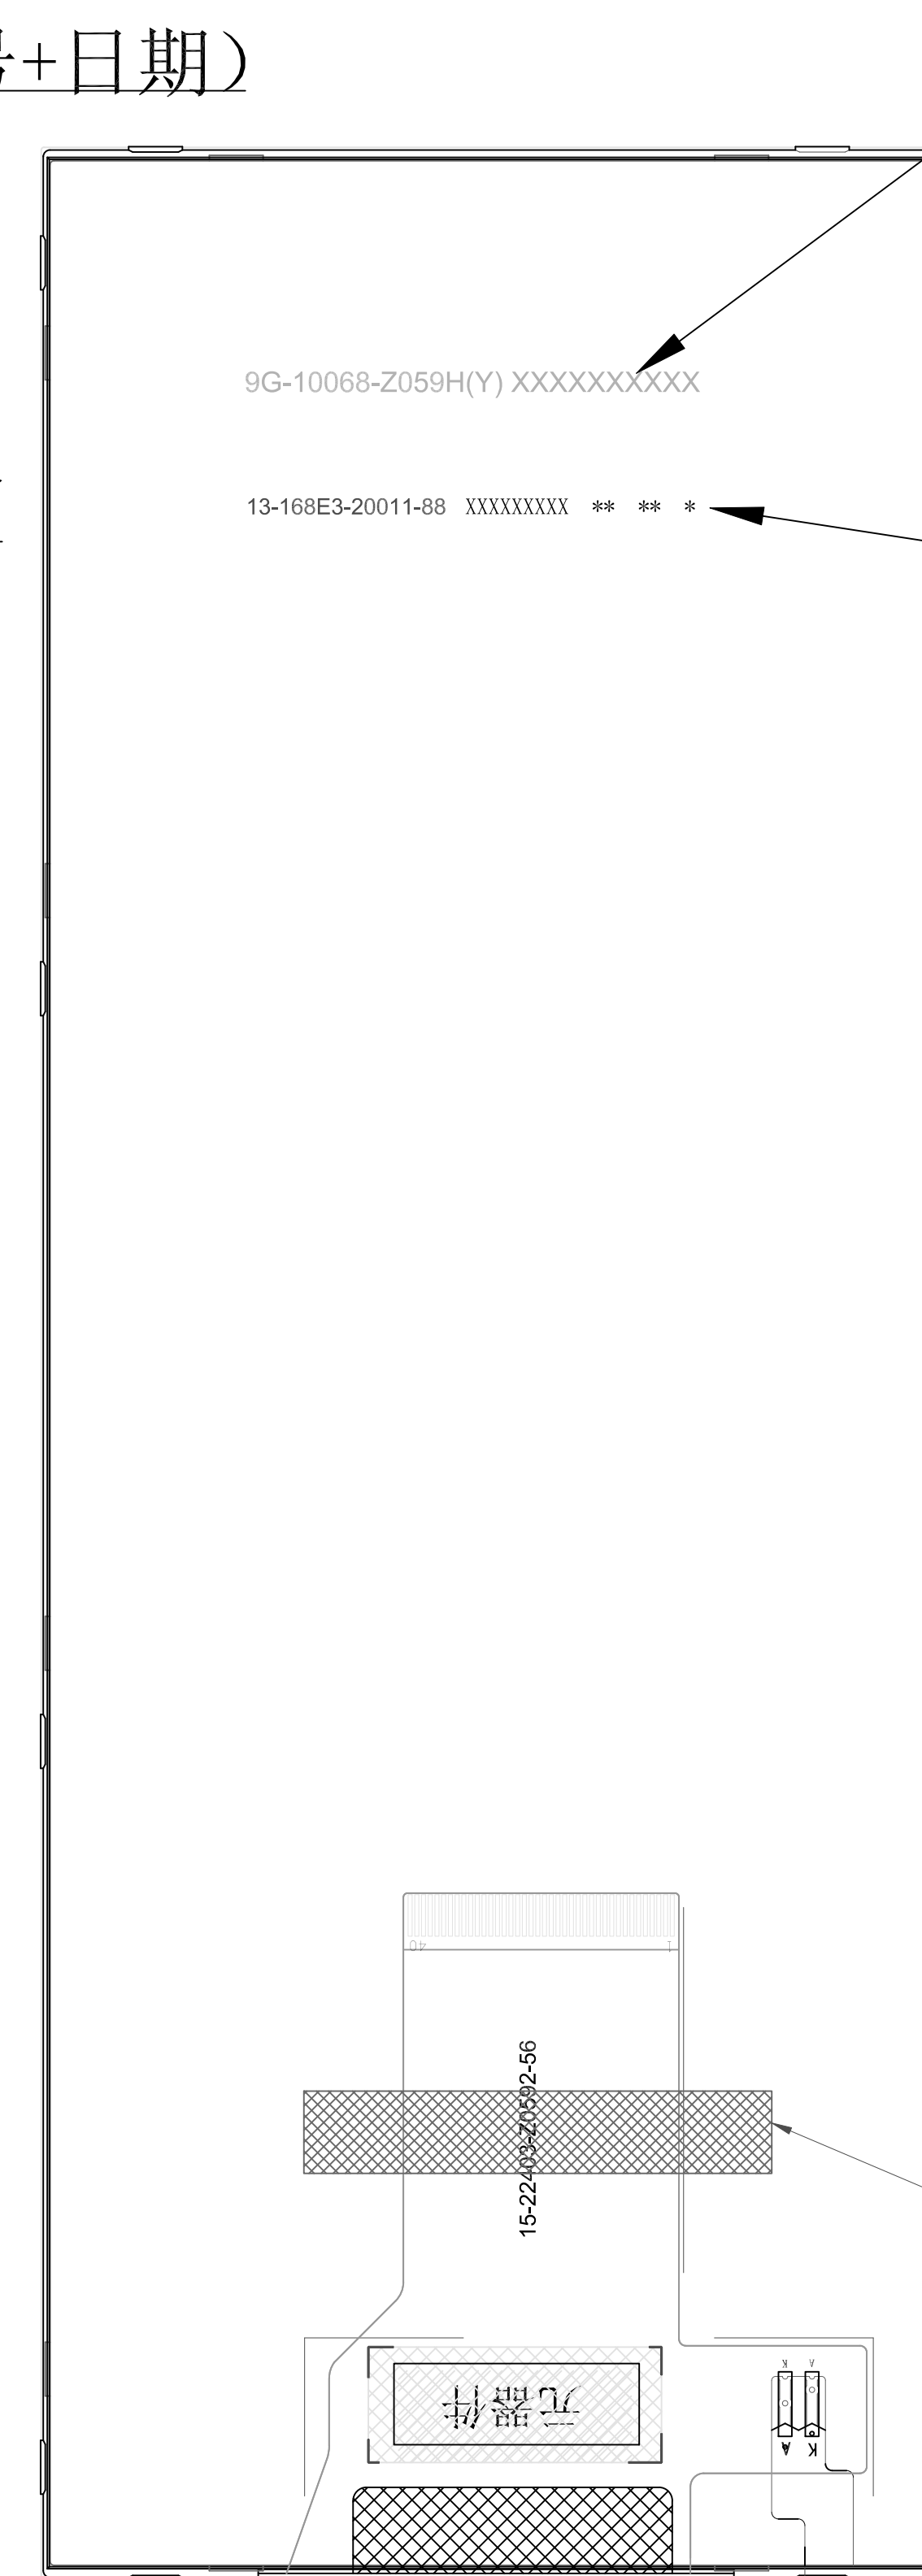
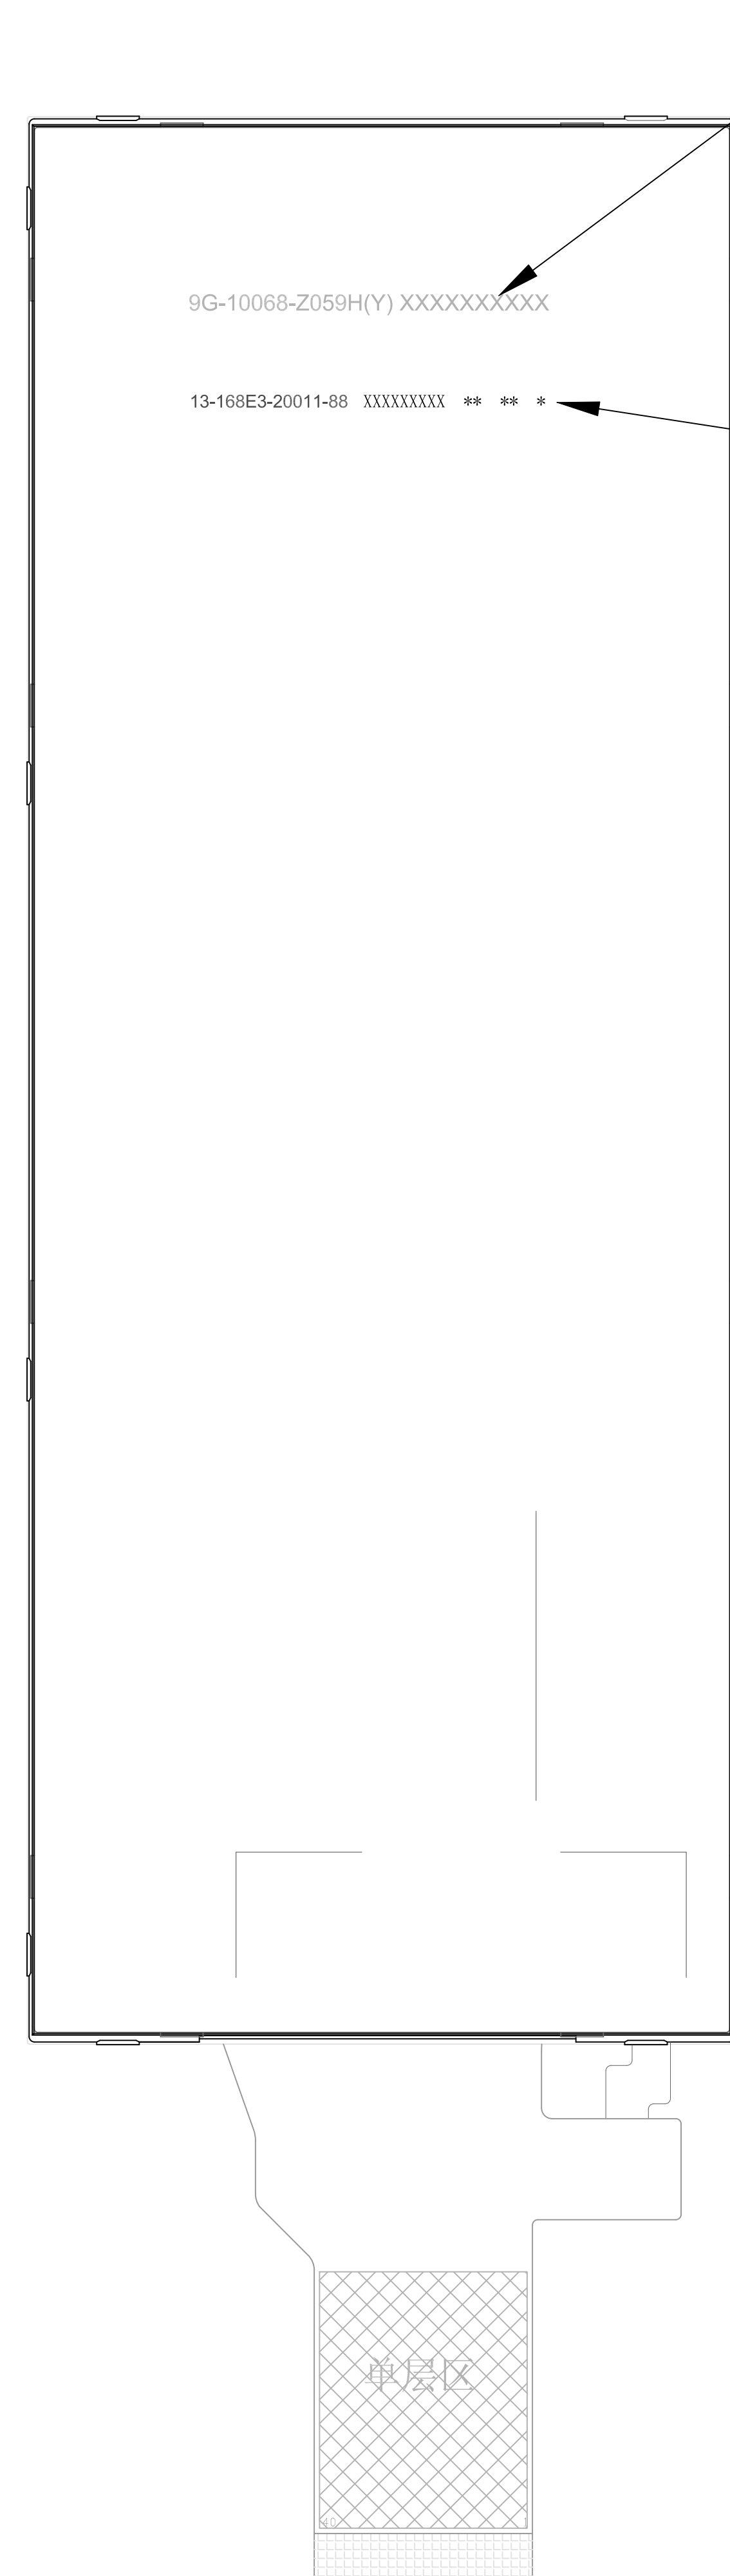


BL 喷码说明:

13-24-033-50061-34	XXXXXXXXXX	**	**	*	年月日	流水号
(1)	(2)	(3)	(4)	(5)	(6)	(7)

(1) DIN 瓦科号 (17 码): 如 “13-24-033-50061-34” 喷为 13-24-033-50061-34
 (2) 包虫菌版号 (8 码): 如 “BLX030202” 喷为 BLX030202
 (3) 包虫菌版流水号 (26 码): “A” 实际为预版本, 如 “A3B” 喷为: A
 (4) 线 别 (2 码): “66” 实际生产类别
 (5) 组 次 (1 码): “3” 实际生产班次, 如: 白班为 “A” 夜班为 “B”
 (6) 生产日期 (6 码): 年月日, 如 “20181210” 喷为: 190103
 (7) 流水号 (5 码): 3 位数 (10 进制), 按实际流水号喷印

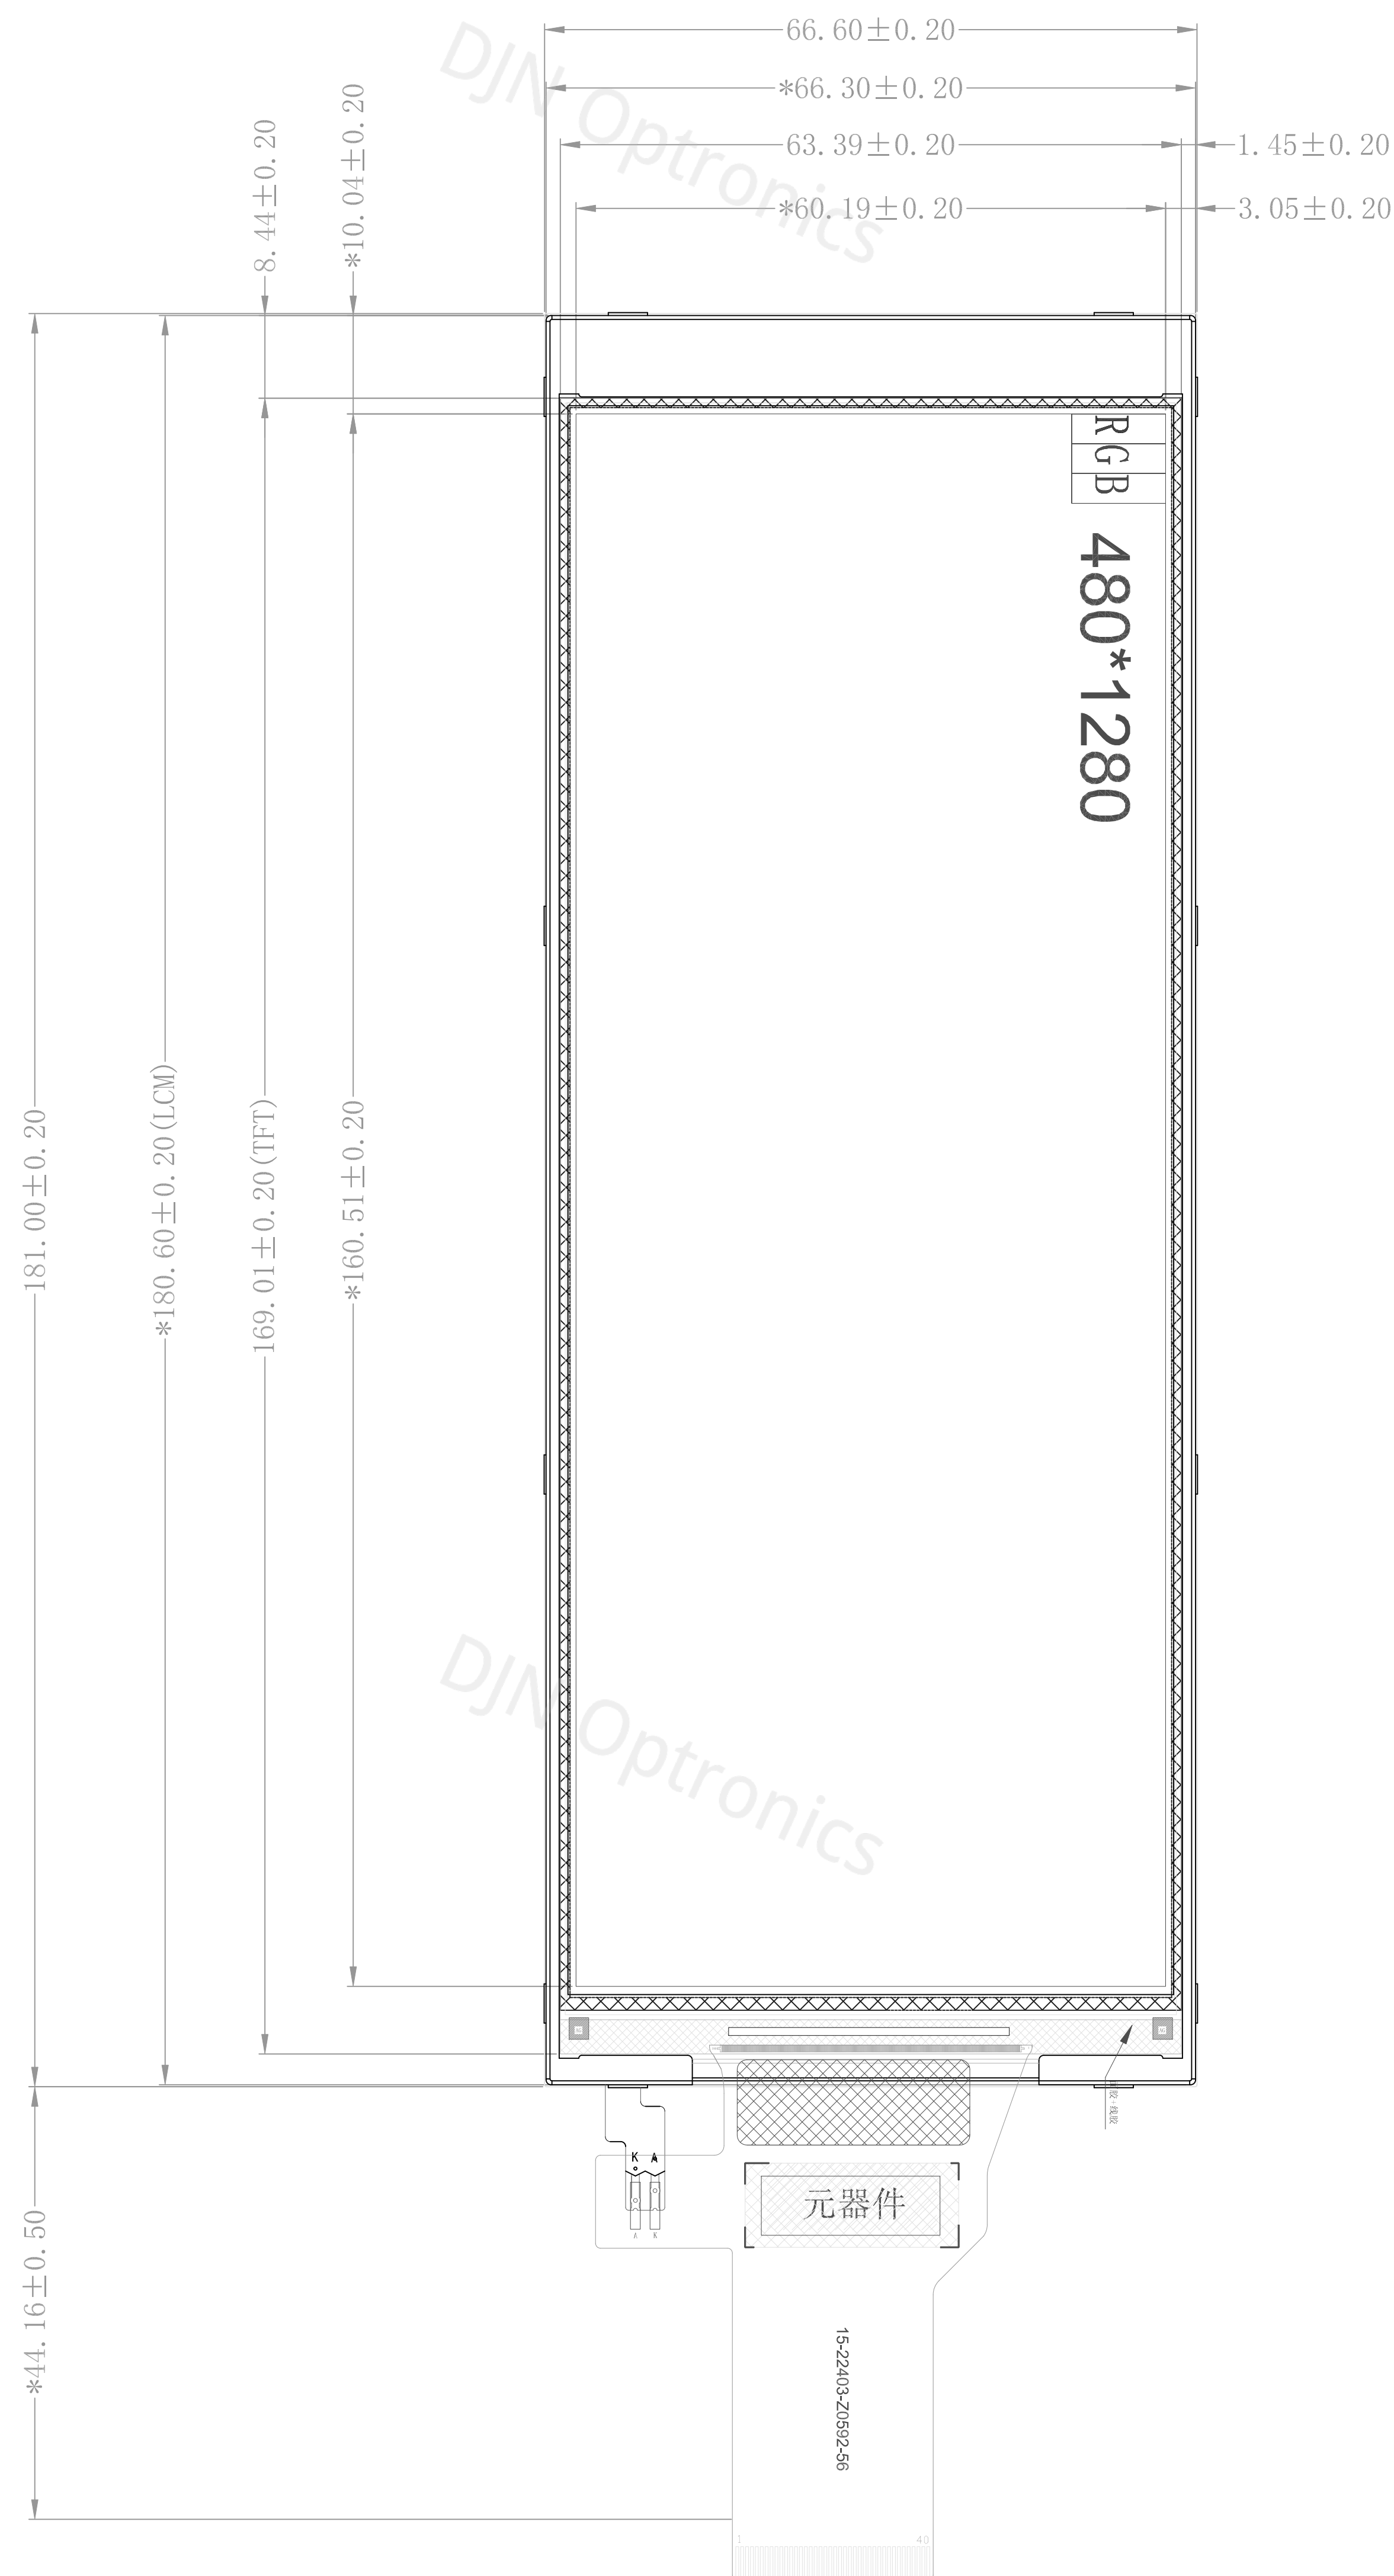

美纹胶

LCM PIN定义



1	GND
2	MIPI_0P
3	MIPI_0N
4	GND
5	MIPI_1P
6	MIPI_1N
7	GND
8	MIPI_CLK_P
9	MIPI_CLK_N
10	GND
11	MIPI_2P
12	MIPI_2N
13	GND
14	MIPI_3P
15	MIPI_3N
16~17	GND
18~19	IOWCNC
20~23	NC
24	RESET
25~26	NC
27	GND
28~29	LED-
30	GND
31	NC
32~33	GND
34	NC
35~36	LED+
37	GND
38~39	VCI
40	NC

技术参数:

1. 产品结构: 液晶显示模组
2. 显示类型: 6.75"HD TFT, TRANSMISSIVE/NORMALLY WHITE
3. LCD型号: BOE QV068Y0Q-N10 (1.0T), IC型号: ER68576CB201;
4. 背光LED: 15 LED²S, 3S5P. 电流电压: $V_f=8\sim 10.2V$, $I_f=160mA$;
5. 光学参数: 色坐标: $X:0.265\pm 0.03$, $Y:0.290\pm 0.03$; 亮度: $420cd/m^2$ (MIN), $470cd/m^2$ (typ), 均匀性: 75% (MIN) 80% (TYP)
6. 存储温度: $-30^{\circ}C\sim 80^{\circ}C$, 工作温度: $-20^{\circ}C\sim 70^{\circ}C$;
7. 尺寸标记: *:重点必测试尺寸 () :参考尺寸有需要才测试; ①: 尺寸编号 (有全尺寸测量要求时使用);
8. 未标注尺寸公差: ± 0.2 ;
9. 环保要求: ROHS;

DIMENSION	1 GRADE	2 GRADE	3 GRADE	4 GRADE
$L \leq 20$	0.05	0.1	0.1	0.2
$20 < L \leq 50$	0.1	0.15	0.2	0.25
$50 < L \leq 100$	0.15	0.2	0.25	0.3
$100 < L \leq 200$	0.2	0.25	0.3	0.5
$200 < L$	0.25	0.3	0.5	0.8

UNLESS OTHERWISE SPECIFIED

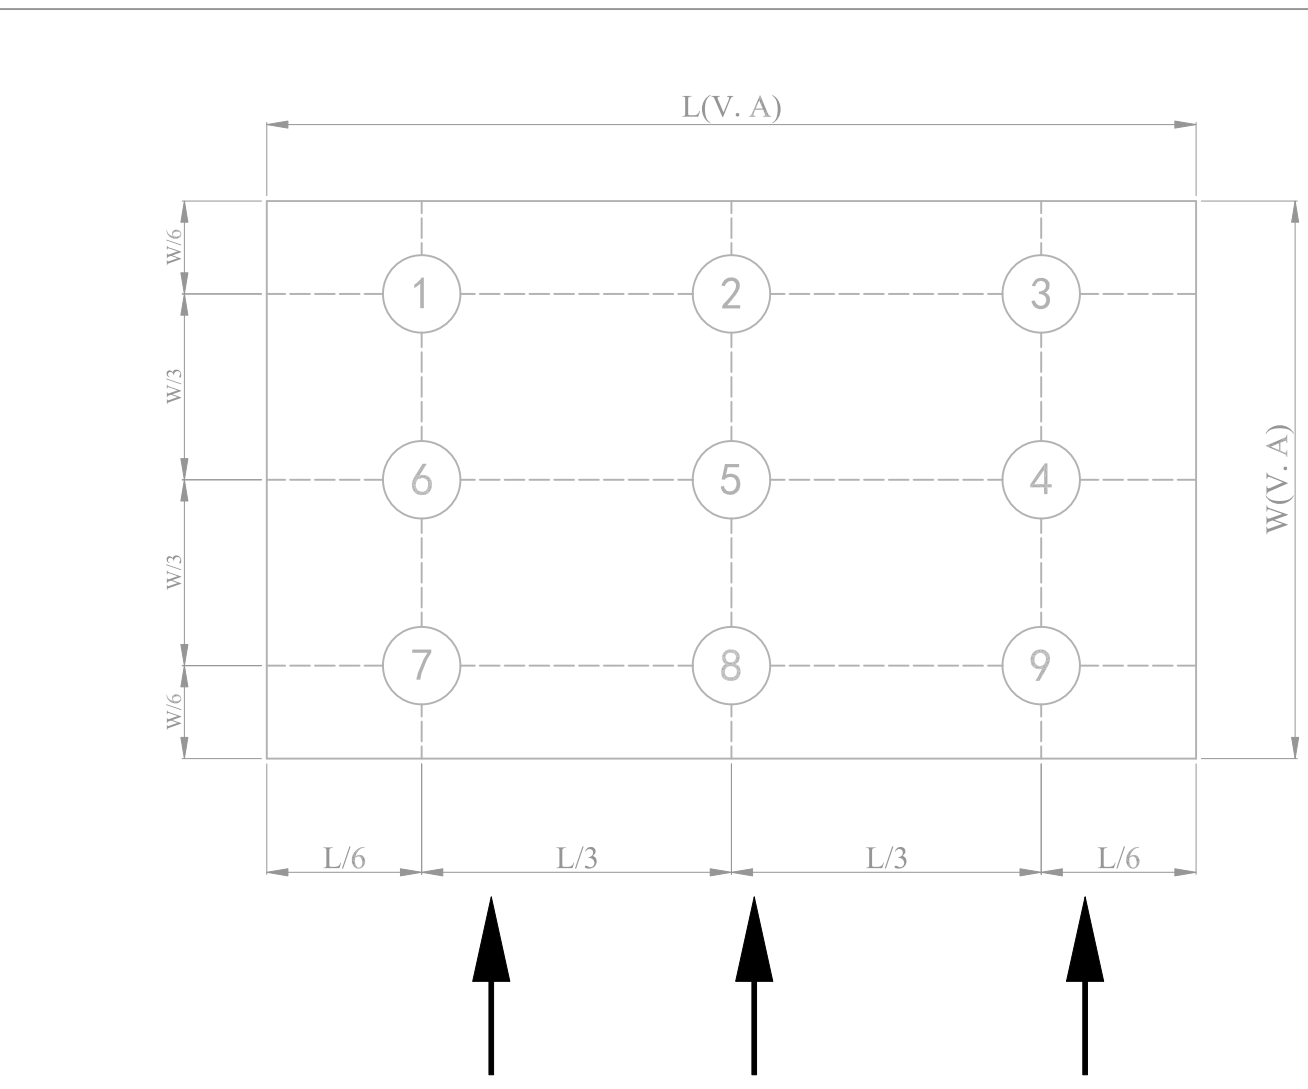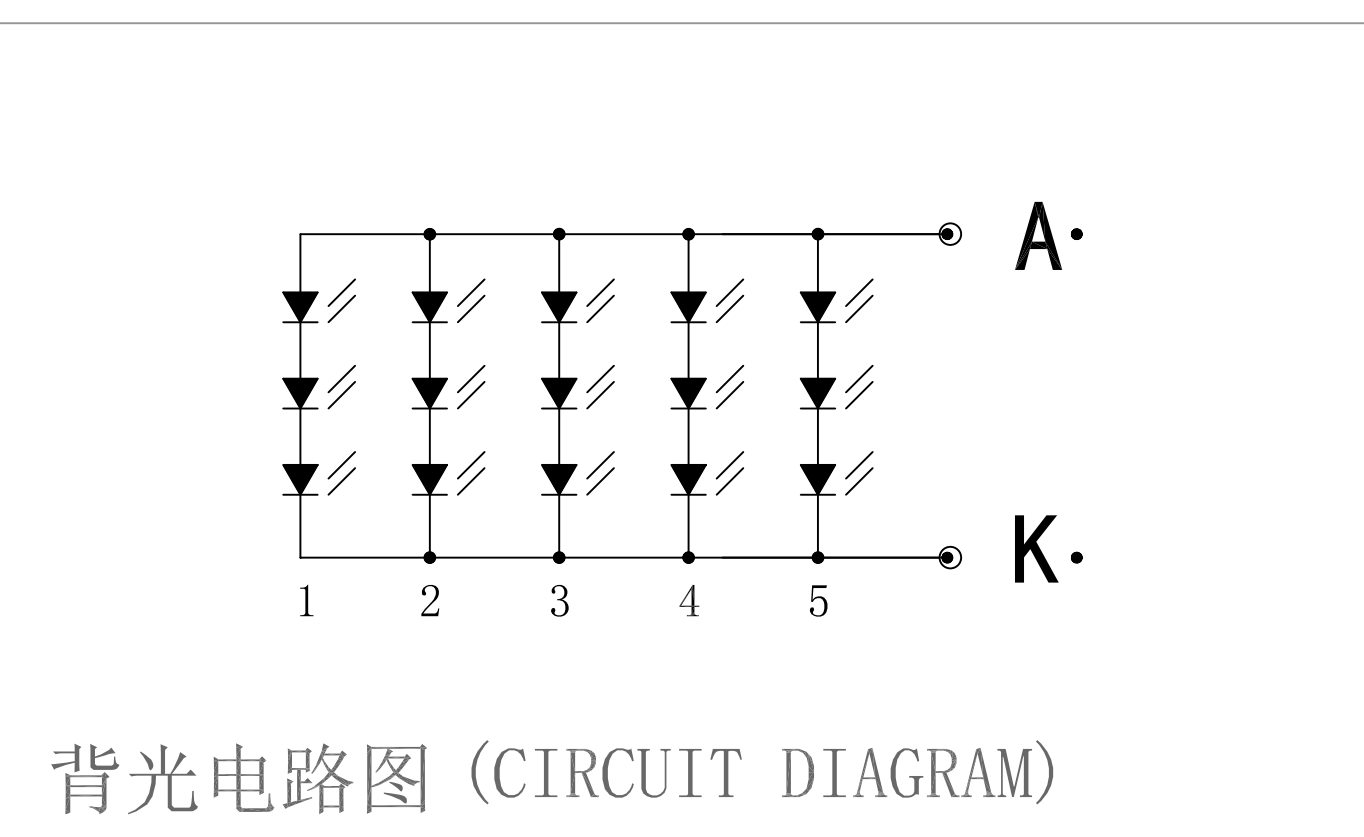

Customer approve	 SHEN ZHEN DJN PHOTOELECTRIC TECHNOLOGY CO.,LTD				
	Model No	9G-10068-Z059H(Y)	Part No	9G-10068-Z059H(Y)	
	Drawing Title	模组成品	Drawn	丁宝玲	A0
	Drawing No	D-RD-191-22	Checked	秦福军	Unit MM
	Scale 1:1	第三视角 	Approve	秦福军	Page 1/1