

D


C

B

A

Notes:

1. Display Type: 2.1" TFT LCD
2. Display Mode: Normally Black
3. Viewing Direction:All' Clock
4. Driver IC:ST7701SN-G5 COG
5. Lcm Brightness: 350cd/m²(MIN),400cd/m2 (TYP)
6. Black Light: 4 Chip White LEDs
IF=80mA VF=2.8-3.4V
- 7.Operating Temp: -20°C TO 70°C
Storage Temp: -30°C TO 80°C
- 8.Unspecified Tolerances :±0.2mm
- 9.带*为重点尺寸


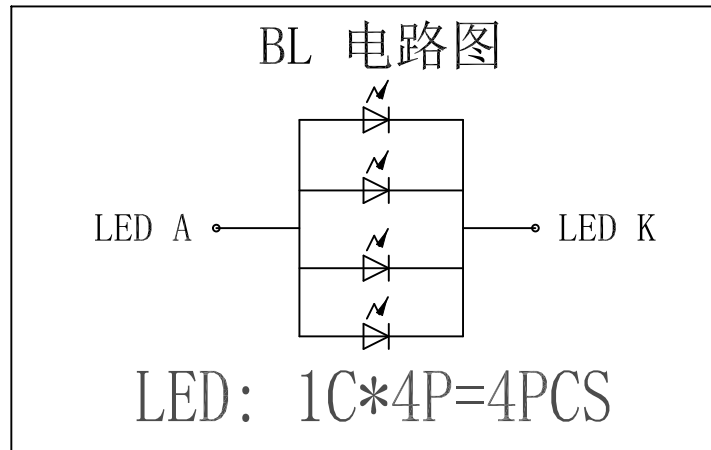


TOLERANCE TABLE(±)					
DIMENSION	GRADE 1	GRADE 2	GRADE 3	GRADE 4	GRADE 5
L ≤ 20	0.05	0.1	0.1	0.1	0.2
20 < L ≤ 50	0.1	0.15	0.2	0.2	0.3
50 < L ≤ 100	0.15	0.2	0.25	0.3	0.4
100 < L ≤ 200	0.2	0.25	0.3	0.4	0.5
200 < L	0.25	0.3	0.4	0.5	0.6
UNLESS OTHERWISE SPECIFIED					

Customer approve		DJN 帝晶光电 SHEN ZHEN DJN PHOTOELECTRIC TECHNOLOGY CO.,LTD			
	Model No	9G-12021-Z049H	Part No	SZA5199	
	Drawing Title	全贴合成品	Drawn	丁宝玲	A1
	Drawing No	D-RD-346-23	Checked	秦福军	Unit MM
	Scale 1:1	第三视角	Approve	秦福军	Page 1/1

无卤		REACH	RoHS	NO.	CONTENT	DATE
A M E N D	△				NEW	丁宝玲 20220316
	△				增加盖板丝印	丁宝玲 20240124
	△					
	△					

保密等级(秘密)

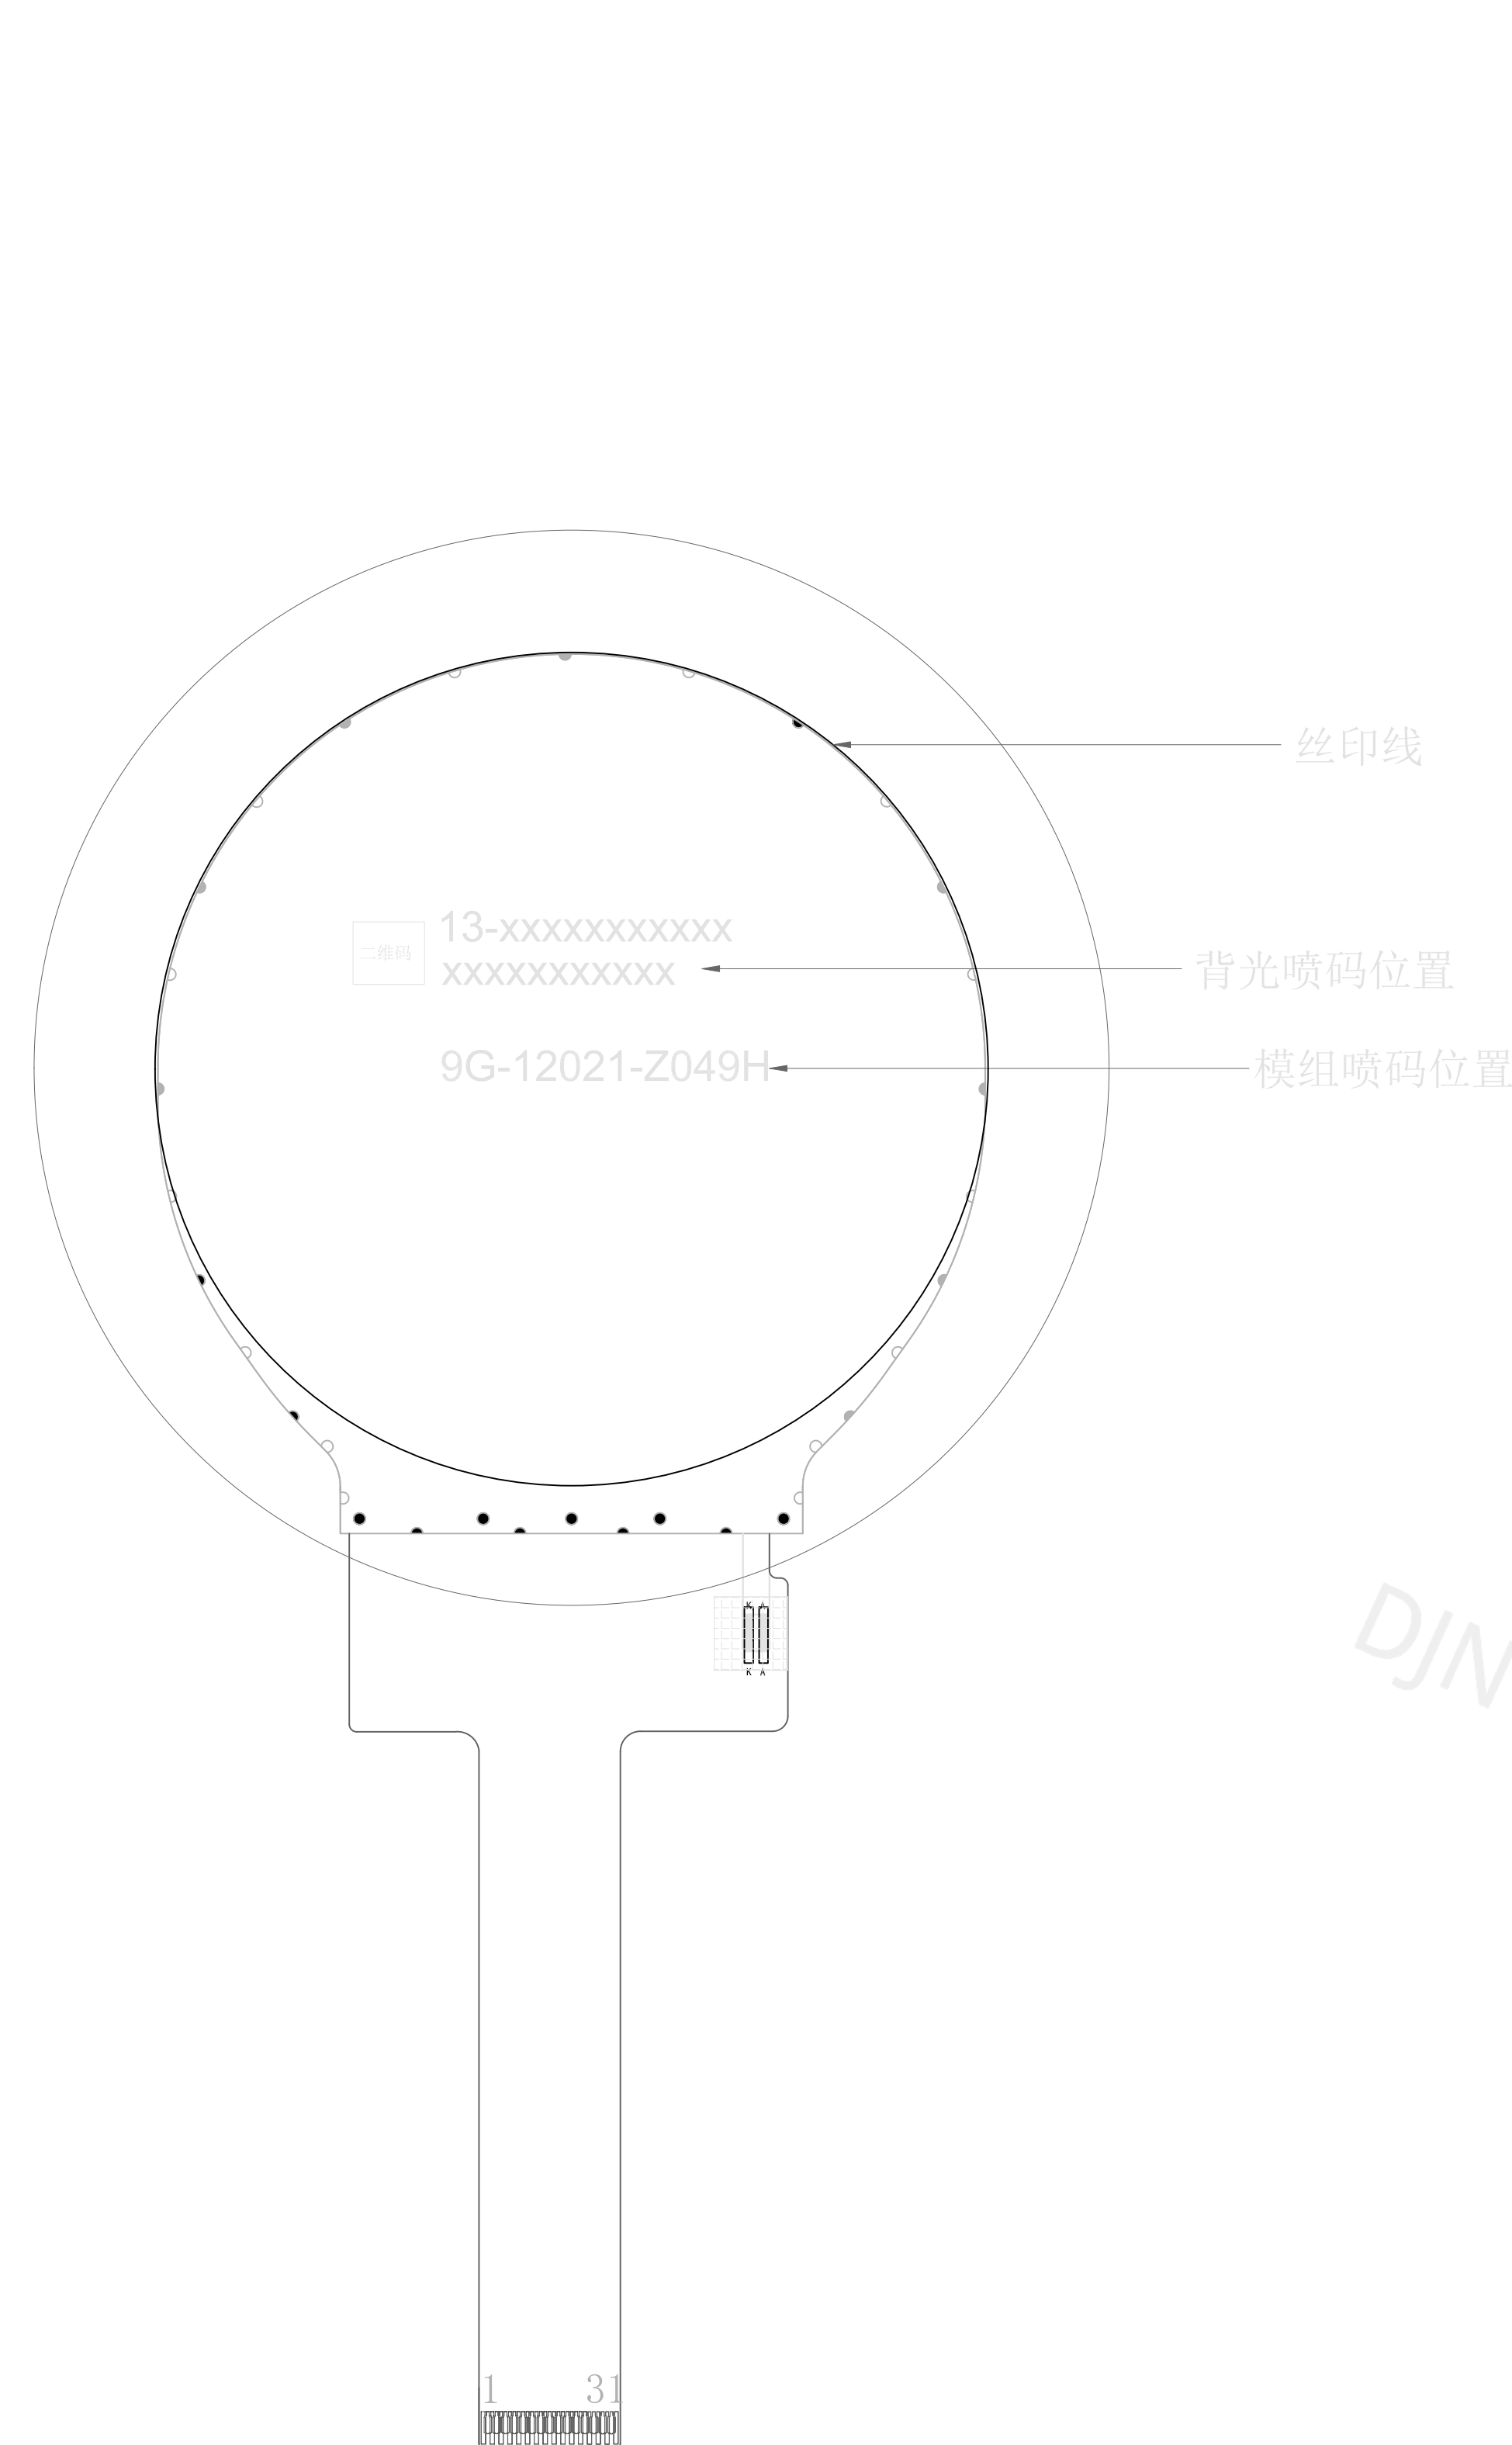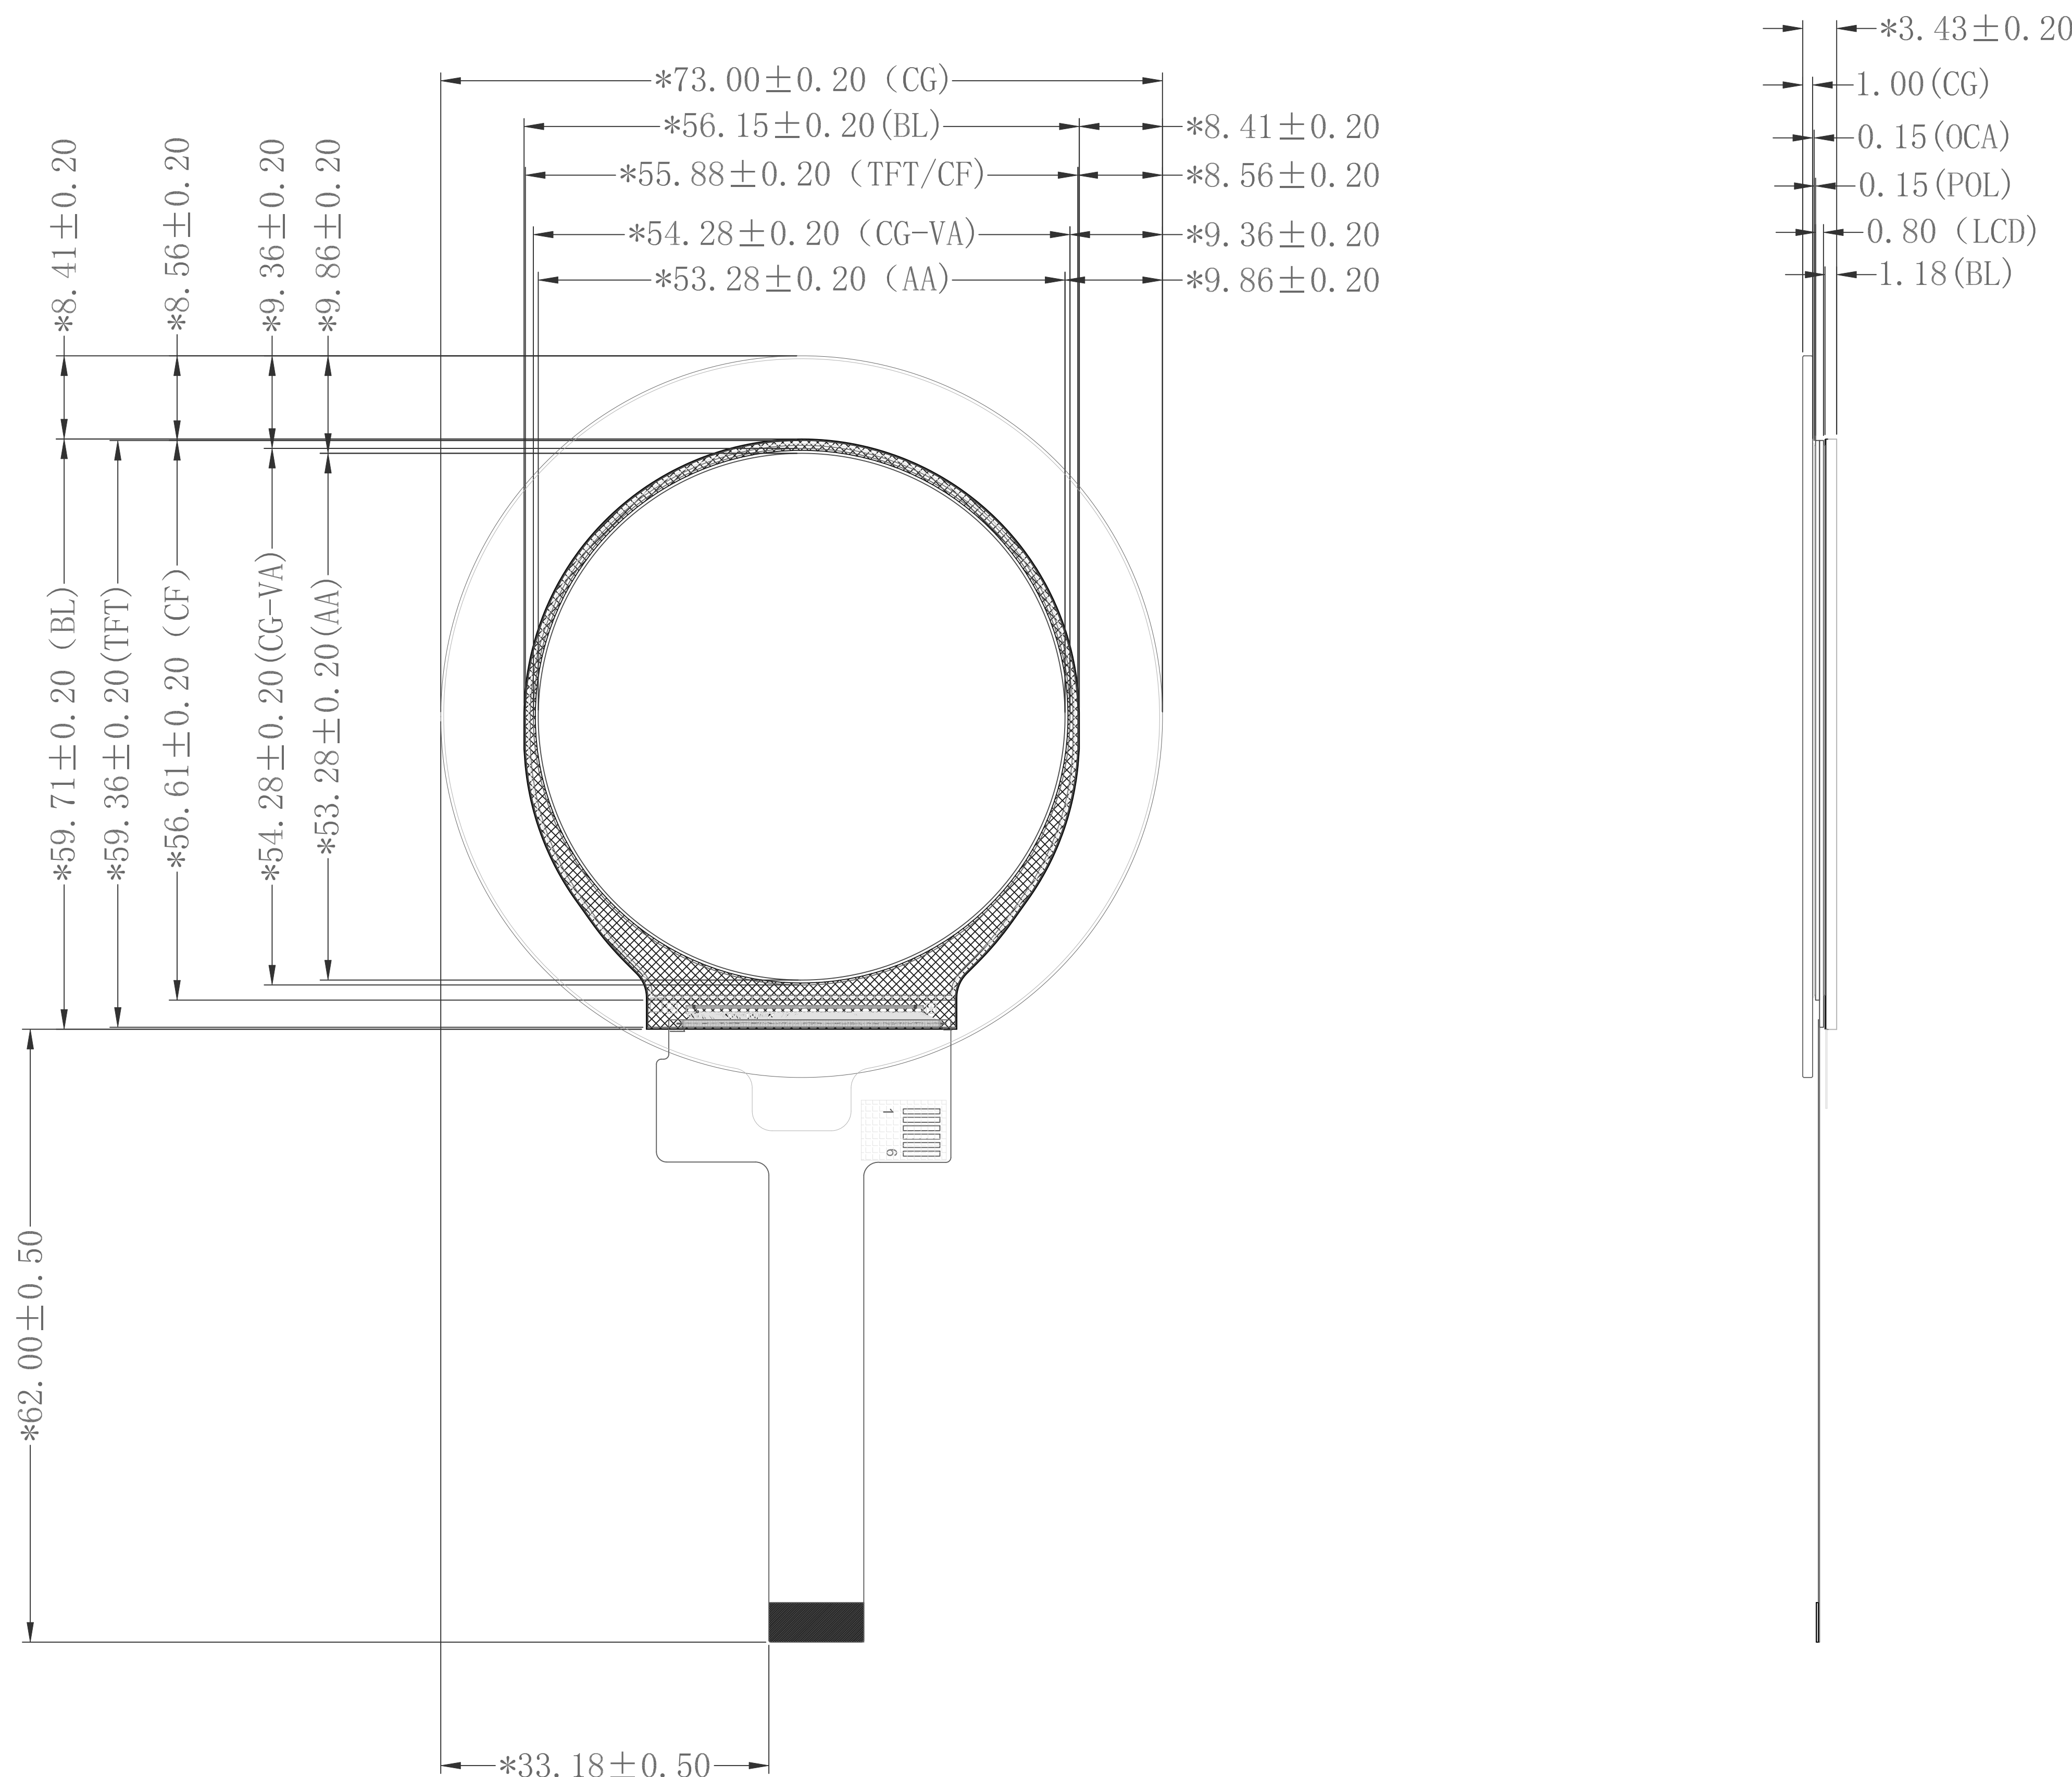

TP	
1	GND
2	VCI
3	TP-INT
4	TP-SDA
5	TP-SCL
6	TP-RESET

LCM	
1	LEDK
2	SDA
3	SCL
4	CS
5	RESET
6	R4
7	R3
8	R2
9	R1
10	R0
11	G5
12	G4
13	G3
14	G2
15	G1
16	G0
17	B4
18	B3
19	B2
20	B1
21	B0
22	DE
23	PCLK
24	HS
25	VS
26	GND
27	VCI
28	TP-INT
29	TP-SDA
30	TP-SCL
31	TP-RESET