
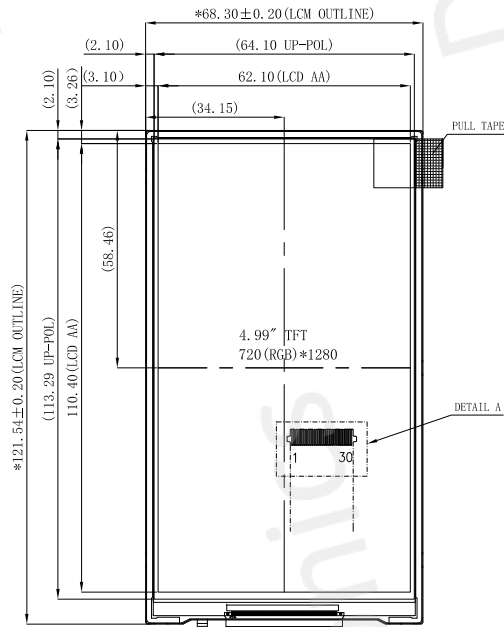
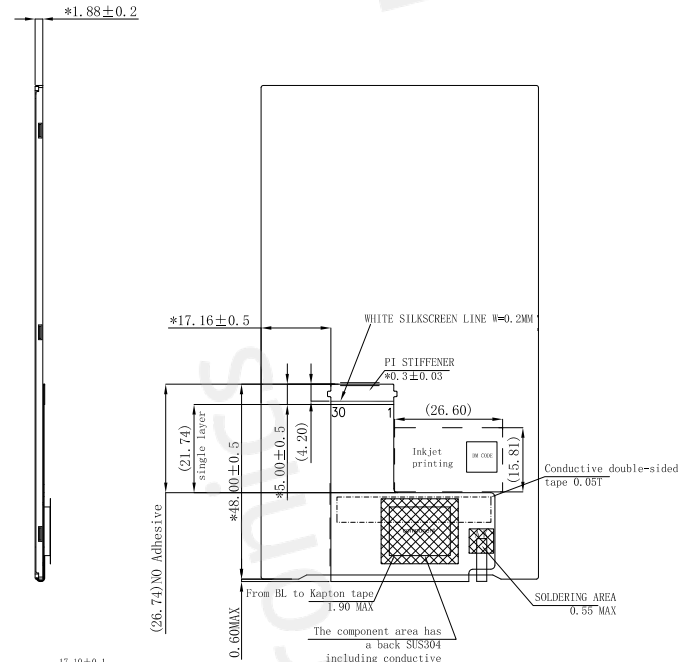


NO.	CONTENT	DATE
NEW		20260618



DETAIL A
SCALE 2:1

CONN: Aces Electronic
51530-03001-W01

TFT PIN DEFINITION

PIN No.	SYMBOL
1	LEDK
2	LEDK
3	LEDA
4	LEDA
5	GND
6	VCC_3V3
7	VCC_3V3
8	GND
9	VDDIO_1V8
10	GND
11	RESET
12	TE
13	GND
14	MIPI_D3N
15	MIPI_D3P
16	GND
17	MIPI_D2N
18	MIPI_D2P
19	GND
20	MIPI_CKN
21	MIPI_CKP
22	GND
23	MIPI_D1N
24	MIPI_D1P
25	GND
26	MIPI_D0N
27	MIPI_D0P
28	GND
29	GND
30	GND

NOTES:

- DISPLAY MODE : HSD, 4.99" IPS LCD, TRANSMISSIVE, NORMAL BLACK
- DRIVE IC: ILI9881C
- OPTIMAL VIEW DIRECTION: ALL
- BACKLIGHT: 12 CHIP-WHITE LED, If=20mA/LED Vf=18 ± 1.8V
- Model luminance: 400 MIN Cd/M2 450 TYP Cd/M2
CHROMATICITY COORDINATE: X=TBD ± 0.03 y=TBD ± 0.03
- OPERATING TEMPERATURE: -20° C TO 70° C
STORAGE TEMPERATURE: -30° C TO 80° C
- * CRITICAL DIMENSION
- Undeclared Tolerance: ± 0.3mm.

Customer approve

DJN 帝晶光电 DJN OPTRONICS TECHNOLOGY CO., LTD.

Model No	SZA7126	Part No	
Drawing Title	4.99" LCM	Drawn	ZLY
Drawing No	D-RD-***-25	Checked	CK
Scale 1:1	3rd Angle	Approve	TG

Page 1/1